Electronic Engineering

Incorporating . . . ELECTRONICS, TELEVISION & SHORT WAVE WORLD

VOL. 21 No. 254 APRIL 1949 PRICE 2-

Benefit from OUR experience

We've been making electrical cables and equipment for over sixty years. You get the benefit of this experience when you specify B.I.C.C. Capacitors, Television Down Leads, and other types of R.F. Cables, and in fact every kind of cable and wire used in radio work. They are all made to that high standard of excellence known throughout the world ; all designed to meet the present needs of electronic engineers.

B.I. Callender's

EQUIPMENT *for the* **RADIO INDUSTRY**

BRITISH INSULATED CALLENDER'S CABLES LIMITED
NORFOLK HOUSE, NORFOLK STREET, LONDON, W.C.2

GOOD EGG!

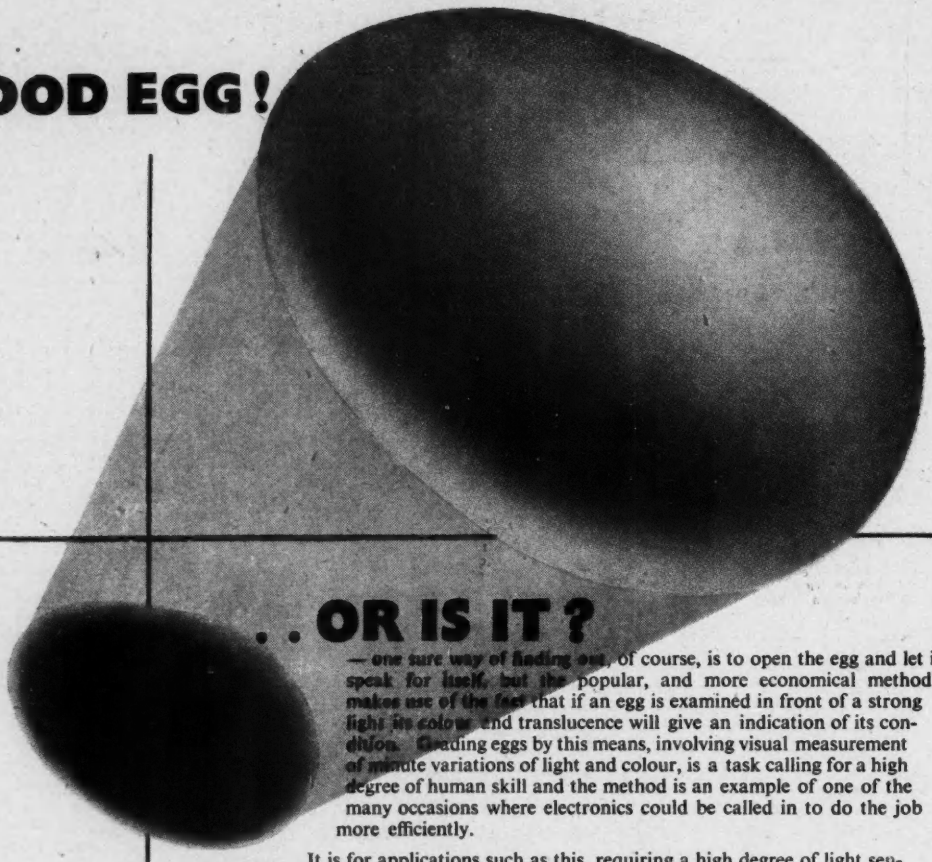

. . OR IS IT ?

— one sure way of finding out, of course, is to open the egg and let it speak for itself, but the popular, and more economical method makes use of the fact that if an egg is examined in front of a strong light its colour and translucence will give an indication of its condition. Grading eggs by this means, involving visual measurement of minute variations of light and colour, is a task calling for a high degree of human skill and the method is an example of one of the many occasions where electronics could be called in to do the job more efficiently.

It is for applications such as this, requiring a high degree of light sensitivity, that the Mazda 27M1 has been designed. It is a nine stage photo-electric multiplier, capable of multiplying very small currents produced under weak illumination by an average value of one million times, when operated at 100 volts per stage. The resultant output current is a linear function of the exciting illumination, under normal operating conditions, and since secondary emission occurs simultaneously, the frequency response is flat up to the frequencies at which transit time becomes a limiting factor.

Because of its great sensitivity, low noise level, low dark current and freedom from distortion the 27M1 is ideal for light operated relays, for film scanning, facsimile transmission and in scientific research involving low light levels; and in many applications its small size is an advantage.

Full details of the 27M1 and the 27M2 will be given on request.

EDISWAN **MAZDA Radio Valves & Cathode Ray Tubes**

THE EDISON SWAN ELECTRIC COMPANY LIMITED, 155 CHARING CROSS ROAD, LONDON, W.C.2

CLASSIFIED ANNOUNCEMENTS

The charge for these advertisements is twelve words or less 5/- and 4d. for every additional word. Box number 2/- extra, except in the case of advertisements in "Situations Wanted" when it is added free of charge. A remittance must accompany the advertisement. Replies to box numbers should be addressed to: Morgan Bros. (Publishers) Ltd., 28, Essex Street, Strand, London, W.C.2 and marked "Electronic Engineering." Advertisements must be received before the 10th of the month for insertion in the following issue.

OFFICIAL APPOINTMENTS

Vacancies advertised are restricted to persons or employments excepted from the provisions of the Control of Engagement Order, 1947.

ROYAL NAVY. Short Service Commissions in the Electrical Branch. Short Service Commissions of five years are offered in the Electrical Branch of the Royal Navy to ex-R.N.V.R. officers under 35 years of age on 1st January, 1949, who served in the Torpedo, Special, Electrical or Air Branches and were employed on technical duties connected with radar, wireless, air radio, air electrical or ships' electrical equipments. Candidates will be entered in the substantive rank held on release, with seniority adjusted by the time out of the Service. Promotion will be in accordance with the regulations in force at the time for R.N. officers (e.g. a Lieutenant (L) is at present eligible for promotion to Lieutenant-Commander (L) at eight years' seniority). Officers who complete the full period of five years on the Active List will be eligible for a gratuity of £500 (tax free). Daily rates of pay are as follows:—Sub-Lieutenant (L), 13s.; Lieutenant (L) on promotion, 17s., after two years, 19s., after four years £1 4s., after six years, £1 6s.; Lieutenant-Commander (L) on promotion, £1 12s., thence in biennial increments of 2s. per day to a maximum of £2 2s. Marriage Allowance of £337 per annum if aged 25 or over, or £146 if under 25, is payable, and accommodation and rations are provided free, or allowances in lieu. Apply to the Director, Naval Electrical Department, Admiralty, Queen Anne's Mansions, London, S.W.1, for fuller details and application forms.

MINISTRY OF SUPPLY invites applications from Physicists and Electrical Engineers for unestablished posts in grades specified below at the Royal Aircraft Establishment, Farnborough, and other establishments in S. England. Senior Scientific Officer: Salary, range, £670 to £860; Scientific Officer: Salary range, £380 to £620. (Rates for women are somewhat lower.) Starting pay not necessarily at minima quoted. Candidates should possess a good Honours Degree or equivalent. The posts call for experience or special interest in one of the following fields:—Radio and radar research, including design and development of new systems, miniaturisation, VHF technique, aerial design, electronic circuit theory, electronic measurements, digital computing mechanisms. The appointments carry F.S.S.U. benefits. Write, quoting A.436/48/A, to Ministry of Labour and National Service, Technical and Scientific Register (K), York House, Kingsway, London, W.C.2., for application form, which must be returned completed by 30th April, 1949.

MINISTRY OF SUPPLY invites applications from Physicists, Mechanical or Electrical Engineers, for unestablished posts in grade of Senior Experimental Officer at the Royal Aircraft Establishment, Farnborough, and other establishments in S. England. Candidates should possess at least Higher School Certificate or equivalent, be aged 35 or over and have experience in one of the following fields:—Experimental light mechanical engineering and functional testing of light mechanisms, design of optical instruments, photographic techniques and processes in connexion with optical measurements, circuit design, engineering or miniaturised radio and radar equipment. Inclusive salary range, £705 to £895 (men) and £580 to £790 (women). Starting pay not necessarily at minima quoted. Write, quoting A.437/48/A, to Ministry of Labour and National Service, Technical and Scientific Register (K), York House, Kingsway, London, W.C.2, for application form, which must be returned completed by 30th April, 1949.

B.B.C. invites applications for a post in the Television Section of the Research Department at Kingswood, Surrey. Applicants must possess a University Degree, or equivalent qualification in Physics or Electrical Engineering, and should be acquainted with the basic principles of tele-communication. Practical experience and a knowledge of television technique will be an advantage. The work will include research on problems contributing to the general appraisal of television systems, both monochrome and colour. Ample scope for initiative. The salary is in a grade with annual increments of £30 and a maximum salary of £680 per annum. Applications, stating age, qualifications and experience, should reach the Engineering Establishment Officer, Broadcasting House, London, W.1, within seven days of the appearance of this advertisement.

MINISTRY OF SUPPLY invites applications from Electronic Physicists and Electronic Engineers for posts in the grades specified below, in Research and Development Establishments, mainly in Hampshire, Worcestershire and Kent. The qualifications required range from Higher School Certificate or equivalent for the Experimental Officer grades to a good Honours Degree for the Scientific Officer grades. Electronics experience is essential. Inclusive salary ranges are:—Senior Scientific Officer, £670 to £860; Scientific Officer, £380 to £620; Experimental Officer, £495 to £645; Assistant Experimental Officer, £220 to £460. (Rates for women are somewhat lower.) Starting pay not necessarily at minima quoted. Appointments are unestablished but appointment to Scientific Officer grades carries F.S.S.U. benefits. Write, quoting A.161/48/A, to Ministry of Labour and National Service, Technical and Scientific Register (K), York House, Kingsway, London, W.C.2, for application forms, which must be returned by 9th April, 1949.

SITUATIONS VACANT

MURPHY RADIO LTD., invite applications for the following vacancies in the Electrical Design Laboratory. (1) Senior Radio Engineer with good Honours Degree in Physics or Electrical Engineering and several years industrial experience in television or radio receiver development. (2) Radio Engineer with good academic qualifications in Physics or Electrical Engineering, preferably with some industrial experience. Apply to Personnel Dept., Murphy Radio Ltd., Welwyn Garden City, Herts.

PROMINENT ENGINEERING FIRM in North-West requires Senior Engineer having experience in development of centimetric radio aerials and waveguide technique. Reply Box No. 427, E.E.

REQUIRED, several Senior Mechanical or Electrical Draughtsmen with experience in the design of mercury arc rectifiers, high vacuum plant or nuclear physics equipment. Manchester district. Five day week. Paid overtime. Salary according to experience. Apply giving qualifications—educational and training, and details of experience. Mark envelope "TTE." Box No. 448, E.E.

BUSH RADIO LIMITED. Applications are invited from experienced radio engineers for the following positions: (a) Development work on communications and domestic radio receivers; (b) Development work on test gear for quality control television production and laboratory use. Apply in writing only, giving age, details of experience, qualifications, salary required, etc., to the Labour Manager, Bush Radio Ltd., Power Road, Chiswick, W.4.

REQUIRED by a large engineering firm in Lancashire, Technicians experienced in the operation of high frequency induction equipment for the hardening of steel and for brazing, and in the construction of the necessary coil and quenching equipment. Write stating age, experience, and salary required to Box 457, E.E.

FIRM IN N.W. LONDON area, manufacturing a wide range of Industrial Instruments and Controls, has vacancy in its engineering laboratory for Assistant Development and Design Engineer. Applicants should preferably have a Degree, or equivalent, in Electrical Engineering, Mechanical Engineering or Physics, with a good knowledge of the fundamentals of radio technique. Work would include the development of electronic devices and servo mechanisms for industrial application, and practical design experience is desirable. Initial salary will be between £400 and £600 per annum, according to qualifications and experience. Write Box 461, E.E.

TRANSFORMER Manufacturer of repute, London district, requires Chief Engineer. Experience in design of audio and power transformers. Write stating experience and salary. Box 468, E.E.

ELECTRONIC DEVELOPMENT ENGINEER wanted for the Australian Division of a large aircraft organisation. Minimum qualifications are Engineering or Physics Degree, with three years research and development experience. Single men preferred due to accommodation difficulties in Australia. Applications should give full details of education, experience and salary required. Box 465, E.E.

DRAUGHTSMEN are required by the Research Laboratories of the General Electric Co. Ltd., North Wembley, Middx., for work in the field of radio or telecommunications. Vacancies exist for seniors with several years experience as well as for more junior candidates. Apply to the Director, stating age, academic qualifications and experience. This advertisement is inserted by permission of the Ministry of Labour and National Service under the Control of Engagement Order, 1947

WANTED, ex-R.A.F. Radar Mechanics not below Senior N.C.O. rank, by the Government of India for service as civilian Radar Instructors in Royal Indian Air Force training schools in India on a contract basis for 3 years. Apply, Air Advisor's Department, Office of the High Commissioner for India in the United Kingdom, India House, Aldwych, London, W.C.2.

TELEVISION Assembly Line Foreman required by expanding manufacturer in North West London area. Applicants must have ability to organise female labour and have extensive and recent experience of quality mass production of television receivers. A permanent post and good salary for a man with the right qualifications. Box 464, E.E.

THE RADIOCHEMICAL CENTRE. Applications are invited for the post of Senior Physicist to take charge of department engaged upon the following work: the standardisation of radioactive materials, control of radiation hazards, instrument development, and general nuclear physics. Applicants should be men of good professional standing, who have experience of applied nuclear physics and laboratory administration. The successful candidate will be required to develop the work of the department on his own initiative, and to collaborate with other institutions. Applicants should be between the ages of 25 and 45, and they will be required to pass a medical examination. A substantial salary will be offered commensurate with the candidate's experience and qualifications. A superannuation scheme is in force, and housing accommodation is available at Amersham. The successful candidate will be appointed to the staff of Thorium Limited (Managing Agents to the Minister of Supply), to whom applications should be sent at The Radiochemical Centre, White Lion Road, Amersham, Buckinghamshire.

THE DECCA NAVIGATOR Company Limited are supplying a Chain of Radio Stations for use by a well-known Oil Company engaged in the Persian Gulf. The following staff are required immediately for duty in this area on the basis of an initial two-year term of service:—Engineer-in-Charge—salary, £1,000 per annum. Applicant must be well qualified Radio Engineer with considerable experience in the erection and operation of radio stations in the field. He will be responsible for the erection of the equipment in the Persian Gulf and for its subsequent efficient operation. Engineer Assistant—salary, £750 per annum. He will be responsible to the Engineer-in-Charge for operation of the Chain and will be required to carry out specialised maintenance work on the radio receivers used by the survey units. He must be prepared to act as relief for the Engineer-in-Charge when necessary, and to take control of any of the radio stations. Station Supervisors—salary, £600 per annum. Applicants must be well-qualified practical radio engineers with considerable experience in the operation of radio stations under field conditions. These men will be required to operate in isolated positions and must be quite confident of maintaining the efficient operation of the stations under these conditions. Selected applicants will be required to pass a medical examination. Air-conditioned accommodation, messing, and medical treatment will be provided free in the area of duty. Up to three months' initial specialised training provided in this country; paid leave with return passage to U.K. after two years overseas service. This work calls for keen, capable men who are prepared to work on their own initiative. Please write full details of your past experience, age and qualifications, indicating which position you are applying for, to The Decca Navigator Company Limited, 1-3 Brixton Road, S.W.9.

INDEX TO ADVERTISERS
SEE PAGE 32

CLASSIFIED ANNOUNCEMENTS (Cont'd.)

LABORATORY TECHNICIAN for audio-frequency development work with Medical Research Council Unit in London. Good qualifications required. Excellent prospects. Box 483, E.E.

LEADING MANUFACTURERS of Radio and Electronic Equipment require the services of Assembly Shop Superintendent. The post calls for exceptional organising ability, a knowledge of batch production and control of mixed labour. Excellent opportunity for man with drive and initiative. Write, giving details of age, education and experience, to Box 476, E.E.

PHYSICIST or Electrical Engineer required to take charge of circuit development of industrial electronic equipment with well-known manufacturers in Midlands. Preferably Honours Graduate, 30-35, with previous experience on this type of work. Salary commensurate with qualifications and experience. Send full particulars and salary required quoting Ref. 214, to Box 480, E.E.

APPLICATIONS are invited by a Government Department in respect of vacancies in the fields of electronic development and research. The posts in question will carry a salary ranging from £400 to £525 per annum, according to qualifications. Write Box 475, E.E.

THE PLESSEY COMPANY Ltd. has opened a new Chemical Research and Development Laboratory near Witham, Essex. Senior Chemists and Chemists are required for electronic development work. Senior Chemists should have Honours Degree and at least seven years' experience of research in a responsible capacity. Chemists should have Degree and aptitude for research. Arrangements will be made to accommodate applicants engaged. Write, in first instance, giving full details to Personnel Manager, The Plessey Company Ltd., Ilford.

VALVE ENGINEERS required by a manufacturer in S.E. England. Application should be made giving full particulars of qualifications and experience in the design and development of valves, quoting Ref. 213, to Box 481, E.E.

SALES MANAGER required by substantial progressive West of England Engineers manufacturing electronic and other light electrical apparatus and precision instruments. Applicants must be Engineers with extensive experience of sale of these products in Home and Export markets, advertising and press publicity. Good salary and prospects to man of initiative and proven ability. Details of experience to Box 485, E.E.

WE ARE CONTINUALLY requiring qualified Physicists and experienced Research and Development Engineers, Draughtsmen (Senior and Junior) for radio, television, radar, electronics, speakers; B.Sc. or H.N.C. preferred; also Technical Representatives, Inspectors, Repairers, Service Engineers, etc. Technical Employment Agency, 179 Clapham Road, S.W.9. (BRIxton 3487.)

SALES ENGINEER. Must possess qualifications and experience of R.F. Cables and ability to act as technical representative. Active men used to own initiative. Part-time also considered. Write fullest details and salary to "B.B.J." c/o Dixons, 43 Great Marlborough Street, London, W.1.

QUALIFIED TECHNICIAN required to control technical aspects of production in large works in North, manufacturing discharge fluorescent and filament lamps. Good technical qualifications and several years' experience of technical control of production in a senior position in a discharge lamp factory, or in an allied branch of industry, are essential. Experience of supervision of junior graduate staff desirable. Reply to Box 479, E.E.

EXPERIENCED DRAUGHTSMAN required for the design of electronic apparatus and light electro-mechanical mechanisms for Instrumentation Laboratory of a West London Aero Engine Manufacturer. Previous experience essential. Write, giving full details, education, qualifications, experience and salary required to Box No. A.C. 435, c/o Central News, 17 Moorgate, London, E.C.2.

DEVELOPMENT ELECTRICAL ENGINEERS with design experience of tropicalised components, radar, radio communication, television, audio-frequency or magnetic recording equipment, are needed to fill progressive positions. Qualifications: Degree, or equivalent, in Engineering or Physics, and several years' design experience. Age 30-35. Starting salary, £500 to £800, according to qualifications, experience and responsibility. There are also vacancies for junior qualified applicants. Send full details of experience and qualifications to Personnel Department, E.M.I. Engineering Development, Ltd., Blyth Road, Hayes, Middlesex.

LONDON COUNTY COUNCIL. Required at Norwood Technical College, Knight's Hill, West Norwood, S.E.27, to commence on 1st September, 1949, Senior Assistant Teacher of Tele-communications Engineering for the City and Guilds Final Certificate and British Institution of Radio Engineers' Graduateship Examinations. Applicants should possess a Degree or its equivalent in Tele-communications Engineering, with teaching and industrial experiences. Salary, £700 by £25 to £800, plus London allowance and graduate and training additions as appropriate. Application forms (stamped addressed foolscap envelope necessary) from the Principal at the College, returnable by 20th April, 1949. (202).

CHIEF ESTIMATOR required by substantial West of England Engineers manufacturing electronic and other light electrical apparatus and precision instruments. Applicants must have wide experience of estimating this class of manufacture for sales and also of operation planning and rate-fixing. Salary commensurate with experience. Details of experience and salary required to Box 487, E.E.

GRADUATE LECTURER in Mathematics required for E.M.I. Electronics College. Applicants should possess a good Degree in Mathematics with Physics, and have knowledge of Radio. Duties include lecturing to City and Guilds Mathematics for Tele-communications V standard. Commencing salary, according to age, qualifications and experience, not less than the appropriate Burnham (Technical) Scale for London district. Superannuation benefits in addition. Apply, giving fullest possible particulars, to Professor H. F. Trewman, M.A.(Cantab.), M.I.E.E., M.I.Mech.E., M.Brit.I.R.E., E.M.I. Institutes Ltd., 43 Grove Park Road, London, W.4.

CONTINUED EXPANSION of the E.M.I. Electronics College has created further vacancies for Lecturers in Radio Communications. Two Lecturers, whose duties will include some technical writing, are required immediately. Applicants should possess a good Physics or Electrical Engineering Degree and also experience in radio, television, etc. Age 22-28. Commencing salary, according to age, qualifications and experience, not less than appropriate Burnham scale. Superannuation benefits in addition. Apply, giving fullest possible particulars to Professor H. F. Trewman, M.A.(Cantab.), M.I.E.E., M.I.Mech.E., M.Brit.I.R.E., E.M.I. Institutes Ltd., 43 Grove Park Road, London, W.4. (Tel.: CHIswick 4417/8.)

DESIGN AND DEVELOPMENT Engineer, with University Degree in Electrical Engineering or Physics, or equivalent qualifications, to control Design Dept. in Company at Godalming, manufacturing electrical instruments and control equipment for aircraft. Salary, £800 per annum or £650 if an unfurnished house is supplied free of all charges. Reply Box 489, E.E.

AN ENGINEER is required for the position of Second-in-charge of a laboratory engaged upon the design and development of radio communications equipment, by a Company situated within a 25-mile radius North-West of London. Applicants must have academic qualifications up to the standard of a Degree in Engineering or Physics, and preferably previous experience in the Light Engineering or Radio Industries. Applications, stating qualifications, experience and salary required, should be made to Box 490, E.E.

UNIVERSITY OF LIVERPOOL. Department of Physics. Applications are invited for the post of Control Engineer for the new Nuclear Physics Laboratory. The selected applicant will be respensible for the design and installation of the control system for the 156" synchro-cyclotron, which is now in the course of construction. Candidates should have considerable experience in the design of modern control gear and in electronics. Salary will be fixed according to qualifications and experience. Applications, stating age, qualifications and experience, together with copies of recent testimonials, should be received by the undersigned not later than 20 April, 1949. Stanley Dumbell, Registrar.

UNIVERSITY OF LIVERPOOL. Department of Physics. Applications are invited for the post of Electronics Engineer in the new Nuclear Physics Laboratory. The selected applicant will be responsible for the design, construction and installation of electronic equipment associated with the 156" synchro-cyclotron, which is now in the course of construction. Candidates must be fully conversant with electronics methods used in Nuclear Physics. Salary will be fixed according to qualifications and experience. Applications, stating age, qualifications and experience, together with copies of recent testimonials, should be received by the undersigned not later than 20 April, 1949. Stanley Dumbell, Registrar.

UNIVERSITY OF ABERDEEN, Natural Philosophy Department. Applications are invited for the post of Lecturer in Electronics, with duties involving both teaching and research, with a view to building up an electronics unit to cover university needs. Salary will be in the range £500 to £900 per annum with F.S.S.U. and children's allowance of £50 per annum for the first and £40 for each subsequent child. Initial placing according to qualifications and experience. Application forms, which can be obtained from the undersigned, should be returned by 30th April, 1949. University of Aberdeen, H. J. Butchart, Secretary.

LARGE ELECTRICAL ENGINEERING firm in South London with international connexions has vacancy for Senior Design Engineer. Applicants must have good experience in developing electronic equipment to production stage. They should also have sound technical background in amplifier design. Good salary according to qualifications. Write Box E.E. 35, L.P.E., 110, St. Martin's Lane, W.C.2.

SITUATIONS WANTED

ADVERTISER able to construct all types valve-operated equipment from diagram only, carry out designer's ideas, make final diagrams, etc., desires post; willing, adaptable. Box 486, E.E.

APPLIED PHYSICIST, M.Sc.(Physics), M.Sc. (Electrical Engineering). Experienced in research in electronics and television, wireless methods of geophysics. At present reader in Electronics and Comm. Engg. at College in India, seeking new employment. Apply Box 478, E.E.

ELECTRICAL ENGINEER, with 18 years' experience of electric furnaces and control equipment, desires post with first-class firm manufacturing or using such plant. Box 477, E.E.

REP. ENGINEER, Service, seeks position; small van available. Box 488, E.E.

EDUCATIONAL

A.M.I.E.E., City and Guilds, etc., on "NO PASS—NO FEE" terms. Over 95 per cent. successes. For full details of modern courses in all branches of Electrical Technology send for our 112-page handbook —FREE and post free. B.I.E.T. (Dept. 337B), 17, Stratford Place, London, W.1.

SERVICE

LOUDSPEAKER repairs, British, American, any make, moderate prices.—Sinclair Speakers, 12, Pembroke Street, London, N.1.

RADIO MANUFACTURERS can undertake development and assembly of radio or electronic equipment. Winding shop with vacuum impregnation plant. Ample space and labour available. Box 316, E.E.

REPORTS on Business Concerns, individuals, tracings. Kershaw, 25 Museum Street, London, W.C.1.

MISCELLANEOUS

WE WILL BUY at your price used radios, amplifiers, converters, test meters, motors, pick-ups, speakers, etc., radio and electrical accessories. Write, phone or call, University Radio Ltd., 22, Lisle Street London, W.C.2. GERrard 4447.

PLASTICS. Small Injection Mouldings in Thermoplastics (Polystyrene, Polythene, Cellulose Acetate, etc.) for Electrical and Instrument Industry. High standards, reasonable price. Delivery promises kept. Write "E. E.," c/o Dixons, 43 Great Marlborough Street, London, W.1.

FULLY EQUIPPED Model Shop available to handle all classes of electronic instrument work. Prompt completion of Production Test equipment, etc. Circuit diagram and brief specification only required. Quotation and delivery date within three days. Quantities 1-25 instruments. Development work also undertaken for electronic/mechanical equipment. High-grade workmanship and accurate performance is guaranteed. Spencer-West (S. S. West), Quay Works, Gt. Yarmouth.

PATENTS

NOTICE is hereby given that Henri Georges de France seeks leave to amend the Complete Specification of the Letters Patent No. 600117 for an invention entitled "Improvement in and relating to Radio Navigation." Particulars of the proposed amendment were set forth in the Official Journal (Patents) No. 3133 dated March 2nd, 1949. Any person may give Notice of Opposition to the amendment by leaving Patents Form No. 19 at the Patent Office, 25 Southampton Buildings, London, W.C.2, on or before the 2nd April, 1949.

CLASSIFIED ANNOUNCEMENTS
continued on Page 4

A Silica valve *as small as this gives you 550 watts output at a maximum frequency of 75 Mc/s*

Designers of industrial electronic equipment will find a wide field of application for the versatile TYS2-250. In addition to having the highest power-to-size ratio of any radiation-cooled valve in the world, the TYS2-250 is outstanding for its efficient performance at high frequencies, stable and high emission, uniform characteristics, and long working life. These features make it ideally suitable as a self-excited oscillator in low power R.F. heating equipments. It also offers considerable potentialities as an R.F. power amplifier in industrial or transmitting apparatus, and may in addition be used as a driver for higher powered valves.

Mullard engineers will be glad to advise on the wide applications of silica valves, the range of which includes the following types :—

VALVE TYPE	*MAXIMUM OPERATING FREQUENCY	OUTPUT POWER
TYS2-250	See panel below	
TYS4-500	50 Mc/s	1,500 W.
TYS5-2000	30 ,,	6,200 W.
TYS5-3000	30 ,,	10,000 W.
TX10-4000	20 ,,	9,700 W.

*** The frequency figures shown are for reduced input; the power output figures for full input.**

VALVE DATA—TYS2-250

*Maximum operating frequency	75 Mc/s.
Output Power (as class C amplifier at 10 Mc/s) ...	760 W.
Max. Anode Dissipation	250 W.
Anode Voltage (50 Mc/s)	2,500 V.
Anode Voltage (75 Mc/s)	2,000 V.
Filament Voltage ...	6.5 V.
Filament Current	12.0 A. approx.

BIF 1949

MAY 2-13
OLYMPIA & EARLS COURT

SEE OUR EXHIBIT

OLYMPIA Stand No. G 17

Mullard

THERMIONIC VALVES & ELECTRON TUBES

Mullard

MULLARD ELECTRONIC PRODUCTS LIMITED
(Formerly The Mullard Wireless Service Co. Ltd.)
CENTURY HOUSE, SHAFTESBURY AVENUE, W.C.2

MVT27

CLASSIFIED ANNOUNCEMENTS (Cont'd.)

NOTICE is hereby given that The Mantle Lamp Company of America seeks leave to amend the Complete Specification of Letters Patent No. 596342, entitled "Improvement in Inductor Tuning System." Particulars of the proposed amendment were set forth in the Official Journal (Patents) No. 3133 dated March 2nd, 1949. Any person may give Notice of Opposition to the amendment by leaving Patents Form No. 19 at the Patent Office, 25 Southampton Buildings, London, W.C.2, on or before the 2nd April, 1949.

FOR SALE

WEBB'S 1948 Radio Map of World, new multi-colour printing with up-to-date call signs and fresh information; on heavy art paper, 4s. 6d., post 6d. On linen on rollers, 11s. 6d. post 9d.

IN STOCK. Rectifiers, Accumulator Chargers, Rotary Converters, P.A. Amplifiers, Mikes, Mains Transformers, Speakers of most types, Test Meters, etc. Special Transformers quoted for.—University Radio, Ltd., 22, Lisle Street, London, W.C.2. GERrard 4447.

COPPER WIRES: enamelled, tinned, Litz, cotton, silk covered. All gauges. B.A. screws, nuts, washers, soldering tags, eyelets. Ebonite and laminated Bakelite panels, tubes. Paxolin coil formers. Tufnol rod. Permanent detectors, etc. List S.A.E. Trade supplied. Post Radio Supplies, 33, Bourne Gardens, London, E.4.

8-WAY HIGH VOLTAGE "Jones" type Plugs and Sockets, with crackle covers, 1s. 6d. pair complete, 12s. dozen pairs, £3 10s. per 100 pairs, carriage paid, Jack Porter Ltd., College Street, Worcester.

A QUANTITY of Type 100R Variacs 2 KVA. Thoroughly inspected and tested. 8 gns. each, carriage extra. Box No. 452, E.E.

VALVES at half-price! Any type supplied new, boxed and guaranteed at half list price. Service Engineer disposing of large stock. Box No. 482, E.E.

CHASSIS, panels, racks and metal cabinets. Stock sizes or made to specification in steel or aluminium. Wrinkle finishes available. Reosound Engineering and Electrical Company, Coleshill Road, Sutton Coldfield.

FOR SALE, 750 Brush Crystal B.H. Earphones with large supply of spare cords. Also 3,500 Raytheon 507A.X. miniature valves. Inquiries to Box 484, E.E.

I.F.Ts. 465, 6s. pr., 3 W.B. Coil Pack Kit, 9s. 6d. 8 μF 450V, 2s.; 100 pF+100 pF, 2d.; Eyelets, etc., 1s. gross; 0.3 amp. 820 ohm Droppers, 2s. 3d.; Mains Transformers, 16s. 6d.; 50 pF Trimmers, 4d.; Knobs, 4d.; B.C. Adapters, 5d. Send for cheapest list in England. Sussex Electronics Ltd. (T), Riley Road, Brighton. (Tel.: 4446.)

FOR SALE, any reasonable offers considered, 5,000 Dubilier Minicap 0.001 μF 350V working; 9,000 Dubilier Minicap 0.01 μF, 350V working; 10,000 Dubilier Minicap 0.005 μF, 350V working; 6,000 T.C.C. type 543, 0.001 μF, 500V working; 5,000 T.C.C. type 543, 0.001 μF, 500V working. Apply Box No. A.2238, Haddons, Salisbury Square, London, E.C.4.

FERRANTI 7.5 KVA VOLTAGE REGULATORS, moving coil. Input, 200-250V+8% to −12%, 45 to 66 c/s. Output, 200-250V±1%, frequency compensated; new and unused, with handbook. Offered at a fraction of cost price to clear. Box 474, E.E.

SPENCER-WEST Television Pre-Amplifiers are improving results for many viewers, Type AC/2, 10 gns. Type A2 (less power supply unit), £4 16s. Particulars from Spencer-West, Quay Works, Great Yarmouth.

CAPACITORS—paper dielectric in rectangular metal cans. 2μF 5,000 volts D.C. and 1μF 1,000 volts D.C. In unused condition. Approximately 1,400 for disposal. Radio frequency cable by B.I. Cables, 7/.022 and 3/.018 low capacity twin semi-air-spaced dielectric cable with star-shaped core. Approximately 4,000 yards for disposal; also coaxial solid dielectric cable in sizes 1/.128, 1/.029, 7/.032, 1/.056. John Cashmore Ltd., Great Bridge, Tipton, Staffs.

WANTED

CARRIER TELEPHONE and Telegraph Equipment of all types in any condition wanted; also Teleprinter or Teletypewriter apparatus. Harris and Gillow, 93 Wardour Street, W.1.

RUN ELECTRONIC ENGINEERING, Vols. 1-18 inclusive. Stechert-Hafner Inc., 2 Star Yard, London, W.C.2.

D.C. AMPLIFIERS

High gain (1,000,000 times) low noise level

Stabilized against mains supply variations and internal drift

THE WALLANDER CO.

3, MEAL MARKET, HEXHAM-ON-TYNE.

Varley

QUALITY RELIABILITY

MAINS TRANSFORMERS
A.F. TRANSFORMERS
SMOOTHING CHOKES
THERMAL DELAY SWITCHES
SLIDER RESISTANCES

Made by

OLIVER PELL CONTROL LTD

CAMBRIDGE ROW BURRAGE ROAD, S.E.18.

Telephone Woolwich 1422

QUICK ACTION TOGGLE SWITCH

AN APPROVED COMPONENT

featuring

Stainless Steel Operating Springs.
Chromium Plated Bush and Dolly.
Heavy Silver Clad Contacts.
Resistance per pole approximately 0.002 ohms.
Rating 250 volts 10 amps.
Conforming to R.C.S.C. Tropical Specification for Type Approved Components.

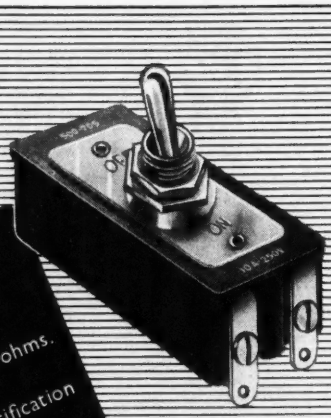

A QUALITY SWITCH at a COMPETITIVE PRICE

Control by PAINTON

PAINTON & CO LTD · KINGSTHORPE · NORTHAMPTON

RESEARCH • ROUTINE TESTING • PRODUCTION

All three sections of Industry served by

AIRMEC

ELECTRONIC INSTRUMENTS

and **INDUSTRIAL EQUIPMENT**

Airmec Laboratories have developed a range of equipment to meet the needs of modern industry, whether for research, production, or testing. They are precise within the limits of present-day knowledge, and embody the most advanced ideas in design.

We should welcome the opportunity of sending you descriptive literature of our H.F. and L.F. Signal Generators, D.C. Oscilloscopes, Valve Voltmeters, Ionisation Voltage Testers, Electronic Decade Counters, Photocell Units, and industrial production equipment such as Electronic Heat Generators, Process Timers, Electro-Mechanical Counters, etc.

The Valve Voltmeter shown possesses a high degree of accuracy and covers a wide frequency range. Furthermore, it is designed for both bench use and for face-mounting in a standard 19 in. rack. An extendable low-loss probe for use at high frequencies is provided. Balanced, unbalanced and differential A.C. voltages may be measured, and the circuit is arranged to measure positive and negative D.C. voltages.

We are exhibiting at B.I.F. OLYMPIA
STAND C.134

SPECIFICATION

A.C. RANGE
0-1.5 V, 0-5 V, 0-15 V, 0-50 V, 0-150 V, Balanced, Unbalanced and Differential

D.C. RANGE
0-5 V, 0-50 V, 0-500 V

RESISTANCE RANGE
0-1,000, 0-10,000, 0-100,000 ohms
0-1, 0-10, 0-100 megohms

FREQUENCY RANGE
30 c/s to 10 Mc/s with probe mounted
10 Kc/s to 100 Mc/s with probe unmounted

AIRMEC LABORATORIES LTD., High Wycombe, Buckinghamshire, England.
Telephone: High Wycombe 2060 Cables: COMMLABS

2756

Take a look inside the **ERIE** *Insulated High Stability* RESISTOR

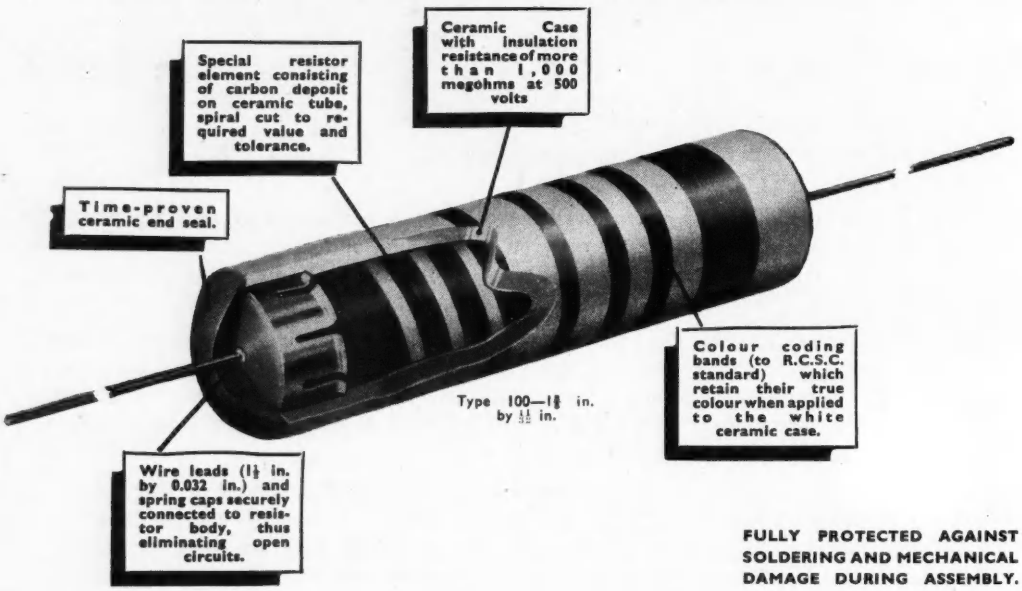
Special resistor element consisting of carbon deposit on ceramic tube, spiral cut to required value and tolerance.
Ceramic Case with insulation resistance of more than 1,000 megohms at 500 volts
Time-proven ceramic end seal.
Type 100—1/8 in. by 1/32 in.
Colour coding bands (to R.C.S.C. standard) which retain their true colour when applied to the white ceramic case.
Wire leads (1 1/2 in. by 0.032 in.) and spring caps securely connected to resistor body, thus eliminating open circuits.

FULLY PROTECTED AGAINST SOLDERING AND MECHANICAL DAMAGE DURING ASSEMBLY.

Quality IS BUILT INTO EVERY DETAIL

Erie High Stability Resistors, besides displaying characteristics well within the limits laid down in the current R.C.S.C. specification, are fully insulated, fully tropical and extremely robust; and are, therefore, eminently suitable for operation in restricted spaces and under the severest of conditions.

Type 100, 1/8 watt, illustrated above, is the first to be released and will be followed in due course by Type 108, 1/4 watt; and Type 109 1/8 watt.

All standard tolerances down to ± 1 per cent. Manufacturers and Research Establishments are invited to write for full details.

ERIE *Resistor Limited*

CARLISLE ROAD · THE HYDE · LONDON N.W.9 · ENGLAND

Telephone: COLindale 8011 **Cables: Resistor, London**

Factories: LONDON AND GREAT YARMOUTH : TORONTO, CANADA : ERIE, PA., U.S.A.

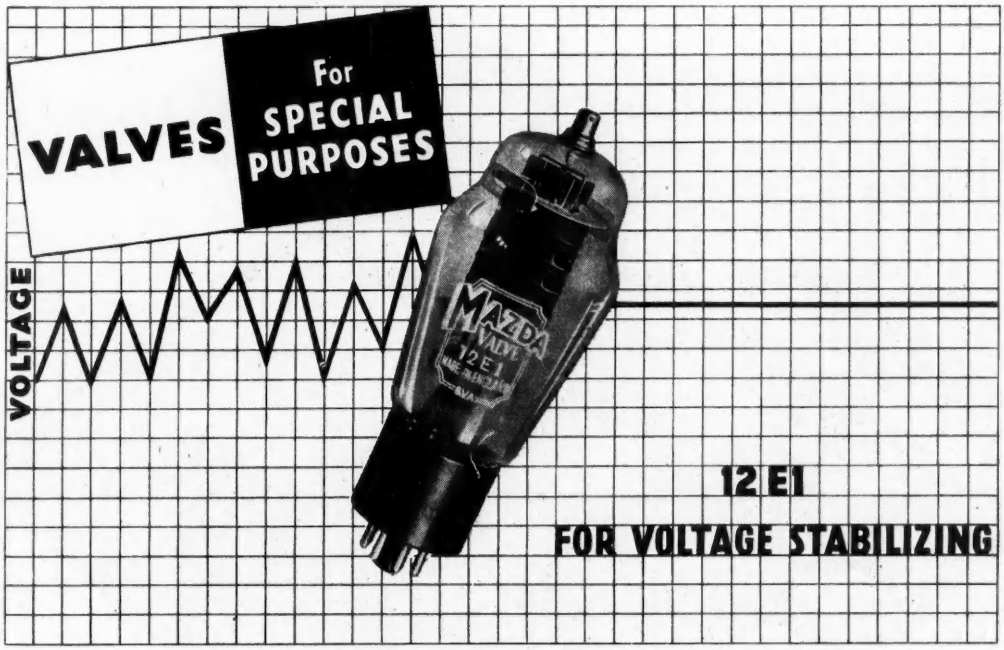

The Mazda 12E1 is an indirectly heated Beam Tetrode designed for use as a series or shunt control valve in stabilized power packs. Although comparable in size to the average large Output Tetrode it is capable of passing a maximum control current of 300 mA.

Further details on request.

RATING

Heater volts		6.3
Heater current (amps.)		1.6
Max. Anode volts		800
Max. Screen volts		300
Max. Grid No. 1 volts		100
Max. Grid 1 to screen volts		400
Max. Anode dissipation (watts)		35
Max. Screen dissipation (watts)		5.0
Max. Cathode current (mA)		300
Max. Heater to Cathode volts	(Cathode positive)	300

DIMENSIONS

Maximum overall length (mm.)	150
Maximum diameter (mm.)	54

EDISWAN

MAZDA

RADIO VALVES AND CATHODE RAY TUBES

v.109

THE EDISON SWAN ELECTRIC CO. LTD., 155 CHARING CROSS ROAD, LONDON, W.C.2

BUT NOT TOO INTRICATE FOR...

Bullers

Made in Three Principal Materials

FREQUELEX
An insulating material of Low Dielectric Loss, for Coil Formers, Aerial Insulators, Valve Holders, etc.

PERMALEX
A High Permittivity Material. For the construction of Condensers of the smallest possible dimensions.

TEMPLEX
A Condenser material of medium permittivity. For the construction of Condensers having a constant capacity at all temperatures.

BULLERS LOW LOSS CERAMICS

BULLERS LTD., 6, LAURENCE POUNTNEY HILL, LONDON, E.C.4
Telephone: Mansion House 9971 (3 lines) Telegrams: "Bullers, Cannon, London"

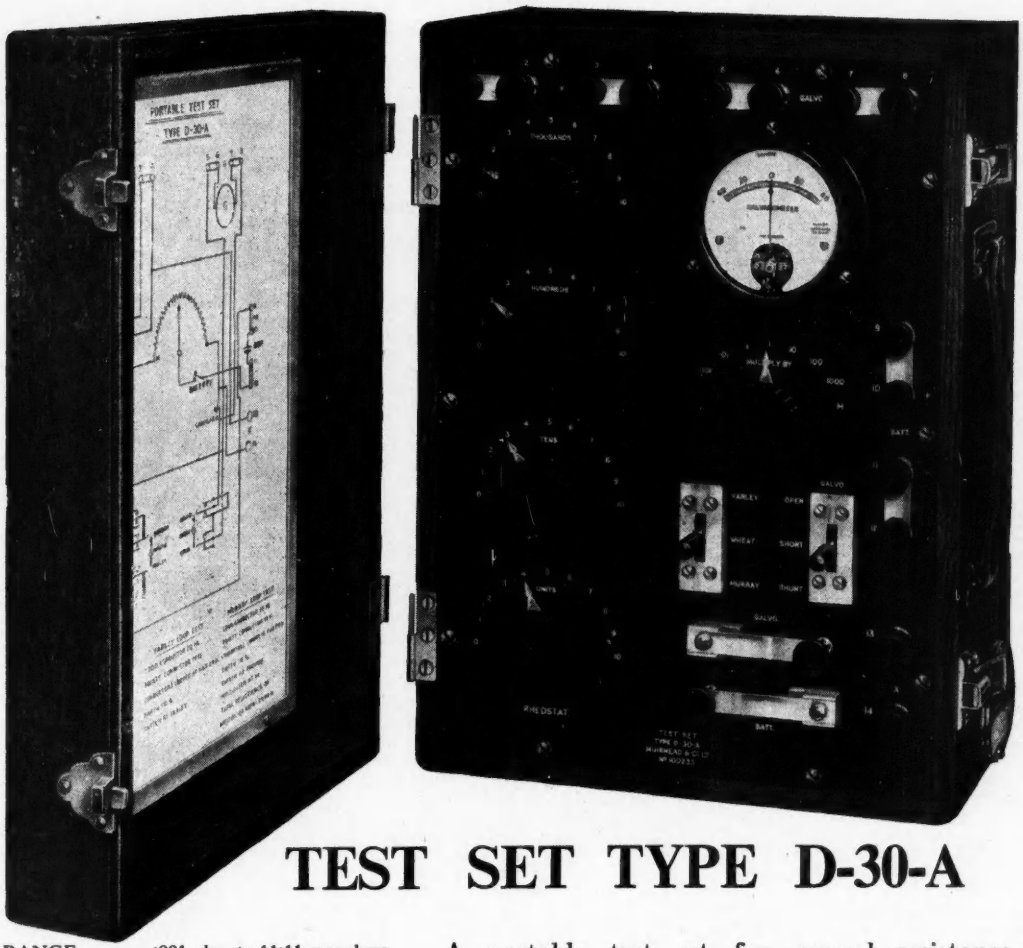

TEST SET TYPE D-30-A

RANGE - - ·001 ohm to 11·11 megohms

DIMENSIONS - - - 12½" x 9½" x 6"

WEIGHT - - - - - - 12 lbs.

A descriptive bulletin will be supplied on request.

A portable test set for general resistance measurements and for fault location on lines and cables—May be used for A.C. tests with suitable power source and detector—Resistance decades and galvanometer can be used externally.

MUIRHEAD

MUIRHEAD AND COMPANY LIMITED, ELMERS END, BECKENHAM, KENT. TELEPHONE : BECKENHAM 0041-0042

FOR OVER 60 YEARS DESIGNERS AND MAKERS OF PRECISION INSTRUMENTS

THE "BELLING-LEE" PAGE

Providing technical information, service and advice in relation to our products and the suppression of electrical interference

Distant Television Reception

There are many cases on record of viewers getting a consistently poor television picture, while others, miles further away from the television transmitter obtain results beyond expectation. The reason generally given for this inconsistency may be illustrated as above. The dipole "A" may be considered to be fifty miles from the transmitter. The waves close to the ground at this point have been attenuated considerably, but those higher up are still strong, they pass over the hill and the (un-attenuated) waves bend down and meet the dipole "B" which may enable the viewer to enjoy a much stronger signal. Close in under the shadow of the hill, at "C" there would probably be a "dead" spot where little or no signal would be received.

* 1. "Doorod" Television Aerial

We have been somewhat alarmed at the results reported from this new fully dimensioned indoor dipole. Reports come in that they are being used, with considerable satisfaction in places as far from Alexandra Palace, as Southend and St. Albans, i.e. 30 and 18 miles respectively. Whereas, we first claimed five or six miles and later eight to ten miles.

We have made calculations based on known field strengths and find that the results are less surprising than was first thought.

The only condition against which one must guard is the presence of concealed pipes, girders or other conductors in the walls (outside drain pipes), etc., which happen to be a functional distance from any proposed indoor dipole.

A Need for Caution

It should not be overlooked that a new Television receiver is in its first flash of high gain, the valves are giving full emission, everything is just right. Such a receiver may give satisfactory results with an indoor aerial at exceptional distances, but, it is quite possible that after a few months use, the gain of the receiver drops, you can no longer hold synchronisation, and disappointment sets in. Everything is normal, and an outside aerial is necessary.

Use of "Doorod"*1 as a "Veerod"*2

The "Doorod"* may be used as a "Veerod" either inverted or "V" style thus endowing it with directional properties at the expense of slight loss in pick-up. The "Doorod" may be so arranged on the wall of the hall of a house as indicated in the diagram, on the ground floor, upstairs landing, or for maximum results in the loft. In certain positions an extension length of coaxial cable will be necessary.



In locating a "V" shaped dipole to take advantage of its directional properties, start with one element pointing in the direction of the transmitter. It may be useful to bear in mind that the "Veerod" has a very marked minima at right angles. This feature may be used to reduce interference.

The Why and Wherefore of the "Veerod"

It is all a question of polarisation. In a house it is difficult to be certain what you are dealing with—vertical or horizontal. The signal leaves the trans-



mitter vertically polarised. Refer now to sketch.

It is picked up on a gaspipe A-B which has currents induced in it. The pipe goes round the corner and conforms to B-C with the same currents as A-B. But now they are horizontally polarised.

Which has most influence on any indoor aerial? At a guess there is about a fifty-fifty chance and it does not really matter if the "Veerod" is upright or inverted.

Undoubtedly the most efficient position in which to use it as an indoor aerial is in the loft, as high up as possible, with its apex tucked right up out of the way of water-pipes, etc., which, in the loft, mostly run in a horizontal plane. But if a "Doorod" is being used as a "Veerod" it is generally more logical to use it as a "V" as illustrated, as this will allow a shorter run to the receiver, but a ladder will have to be used so as to fix the free end of the flexible element. A real practical advantage in using the "Doorod" with the apex uppermost, i.e., as an inverted "V" is the fact that the rigid element can be fixed with the apex out of reach while you are comfortable with both feet on the floor. The flexible element can then be held in position and fixed with tacks or drawing pins. In this case the lead must drop from the apex.

Combined Broadcast and T.V. Aerials

We have had a number of letters from readers asking if it is a fact that anti-interference systems can be applied to television. The answer is yes and no. We have never claimed to offer an interference free television aerial but "Belling Lee" were the first to take advantage of the fact that the mast of a television aerial could be used as a collector of broadcast programmes, and could be used to feed an anti-interference system. It is easy to see how the misunderstanding occurred.

*1. "Doorod" (Reg. app. for) indoor T.V. aerial 30/-.

*2. "Veerod" (Reg. app. for) Attic Model 52/6. Chimney model 90/-.

New Edition of the "Belling-Lee" main catalogue

This 84-page publication is now off the press, it is however not for general distribution but has been prepared for the use of designers of electronic equipment, electrical engineers, etc.

BELLING & LEE LTD
CAMBRIDGE ARTERIAL ROAD ENFIELD MIDDX
ENGLAND

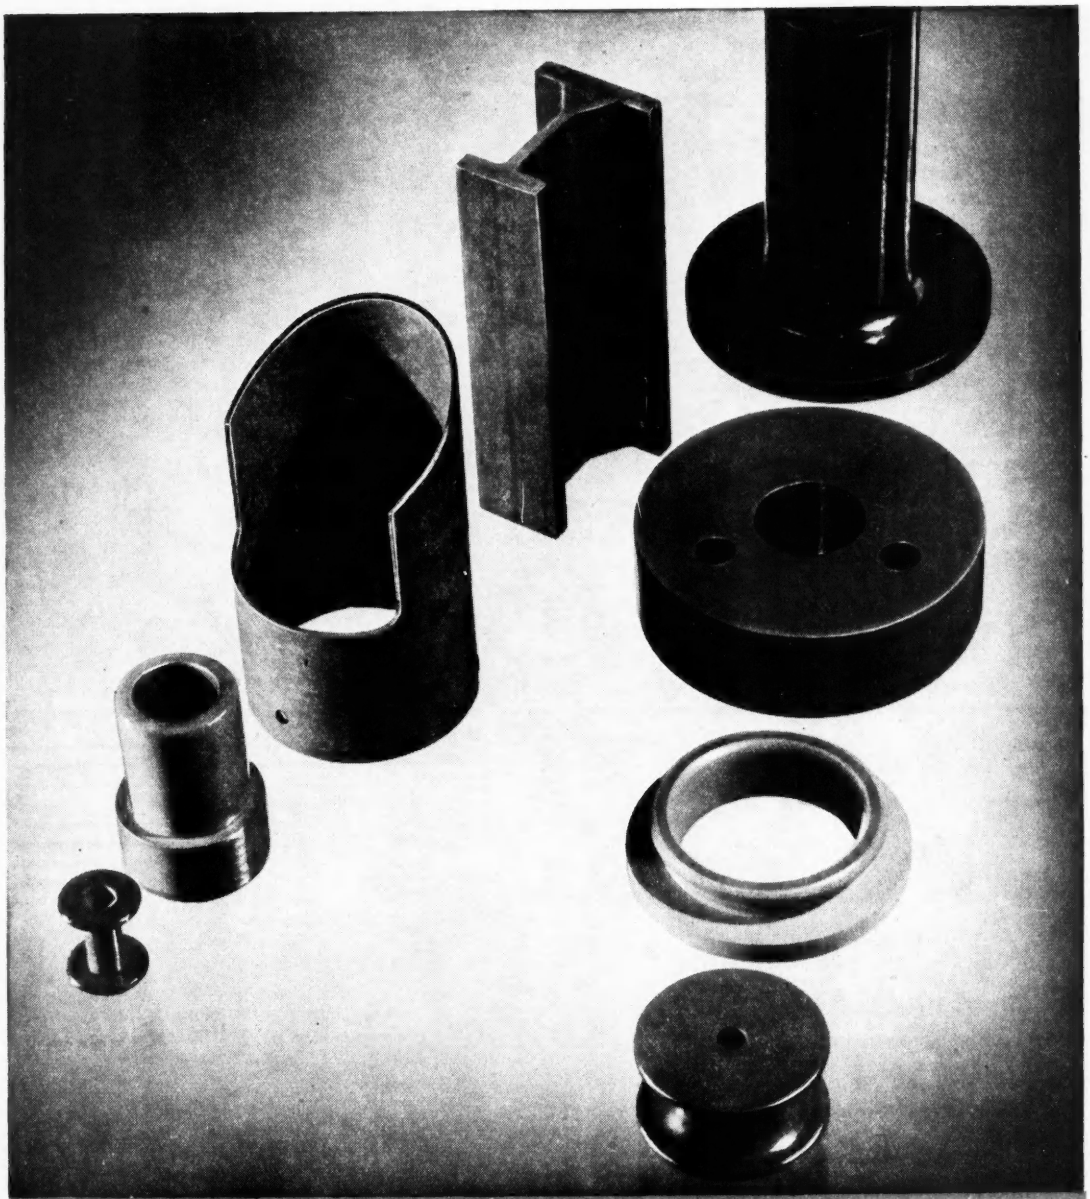

m and i

THE MICANITE & INSULATORS CO. LTD

Empire Works, Blackhorse Lane, Walthamstow, London, E.17

Manufacturers of MICANITE (Built-up Mica Insulation) Fabricated and Processed MICA. PAXOLIN Laminated Materials. PANILAX Laminated Materials and Mouldings. EMPIRE Varnished Insulating Cloths and Tapes. HIGH VOLTAGE BUSHINGS and TERMINALS. Distributors of Micoflex-Duratube Sleevings and Micoflex Durasleeve (Plastics-covered flexible metal conduit)

★

This leaflet tells you all about

THE NEW STANDARD RANGE OF SOMERFORD **E.H.T. TRANSFORMERS**

Fluid insulation combined with hermetic sealing enable us to set a new standard of efficiency and performance in high voltage low current transformers. Available in ratings of 1000–5000 volts at 5 mA with rectifier and cathode ray tube heater windings. The most reliable component for television power packs.

★ *Write for the Leaflet to-day*

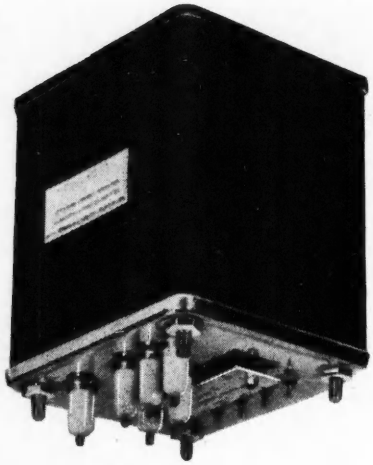

PATENT APPLIED FOR

GARDNERS RADIO Ltd
SOMERFORD · CHRISTCHURCH · HANTS

DAWE

PULSE GENERATOR

Type 412

A versatile instrument for use wherever rectangular voltage pulses are required.

Output :	0—75 volts, positive or negative
Pulse Width:	1, 10 and 100 micro-seconds
Repetition Rate :	1—2,500 c/s (10,000 c/s from an external source)

Visit our Stand, C15, B.I.F. Olympia, (S.I.M.A. Section)

DAWE INSTRUMENTS LTD. 130 UXBRIDGE ROAD, HANWELL, LONDON, W.7 EALING 6215

Lancs. & Northern Representative: A. C. FARNELL, LTD., 15 Park Place, Leeds.

MEASURING ELECTROLYTIC LEAKAGE

THE generally accepted maximum permissible leakage current after forming is given by I (in μ amps.) = 0.15 x C x V working. This bridge measures leakage direct at voltages of 6, 12, 25, 50, 150, 250, 350 and 450. Capacity can be measured up to 500 microfarads.

COMPONENT BRIDGE B101

C : 5 pfd. to 500 mfd.—8 ranges.
R : 5 ohms to 500 Mohms—8 ranges.
L : 0.1 Hy. to 5000 Hys.—4 ranges.
Leakage 0 to 1.5 m/a. Q : 0 to 30.
Precision Comparator.

Price 26 Guineas.

Wayne Kerr

THE WAYNE KERR LABORATORIES LTD., NEW MALDEN, SURREY · MALDEN 2202

BALDWIN

MOUNTING INTERCHANGEABLE WITH THE $3\frac{1}{2}$ in. ROUND PATTERN TO K 113

MAY BE ILLUMINATED DIAL

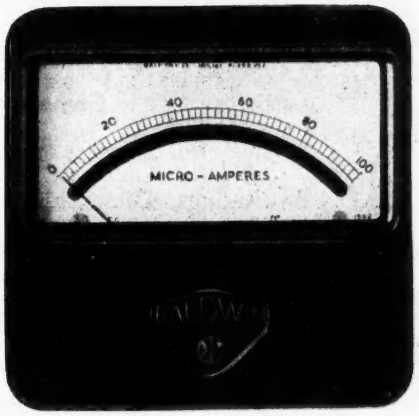

MOVING-COIL RECTIFIER THERMAL: FIRST-GRADE ACCURACY OTHER PATTERNS AND SIZES

Particularly Suitable for incorporation in Test Gear

4-inch FLUSH-MOUNTING INSTRUMENTS

BALDWIN INSTRUMENT CO., LTD., DARTFORD, KENT

Telephone : DARTFORD 2989

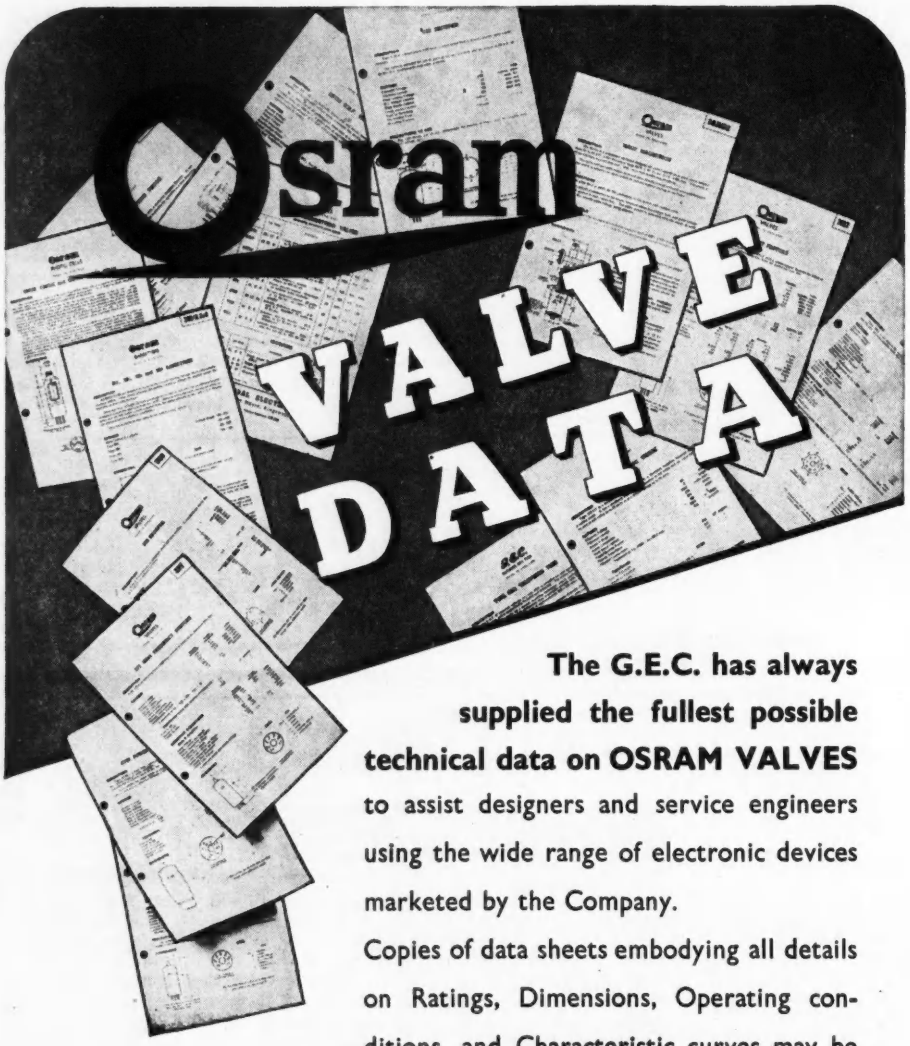

The G.E.C. has always supplied the fullest possible technical data on OSRAM VALVES to assist designers and service engineers using the wide range of electronic devices marketed by the Company.

Copies of data sheets embodying all details on Ratings, Dimensions, Operating conditions, and Characteristic curves may be had on specification of type required to the

OSRAM VALVE TECHNICAL DEPT. *Magnet House, Kingsway, W.C.2*

Osram PHOTO CELLS G.E.C. CATHODE RAY TUBES Osram VALVES

THE GENERAL ELECTRIC CO. LTD., MAGNET HOUSE, KINGSWAY, W.C.2.

For *Interference Suppression*

call in the Experts !

T.C.C.'s long experience in the application of suppression devices enables them to offer a wide range of suppressors of proved efficiency. In addition, T.C.C.'s specialised manufacturing techniques have produced extremely compact types which are easily fitted to equipment and provide effective suppression over an exceedingly wide band of Radio frequencies. Where specialised applications, not covered by standard types, are required, T.C.C.'s Technical Department will be glad to advise. The new Wireless Telegraphy Bill will bring you many suppressor problems—T.C.C. can solve them for you.

Write today for full details and literature.

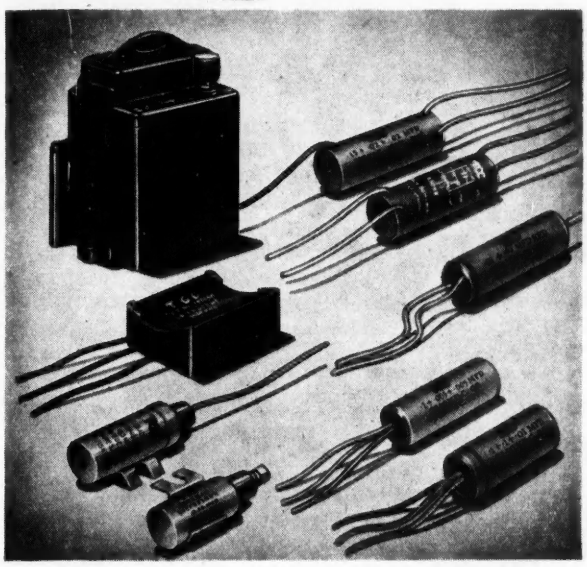

TCC

SUPPRESSOR *Condensers*

IN THE BEST EQUIPMENT YOU'LL SEE TCC

THE TELEGRAPH CONDENSER CO. LTD.

RADIO DIVISION

NORTH ACTON · LONDON · W·3 Telephone ACORN 0061

A Bed of Roses

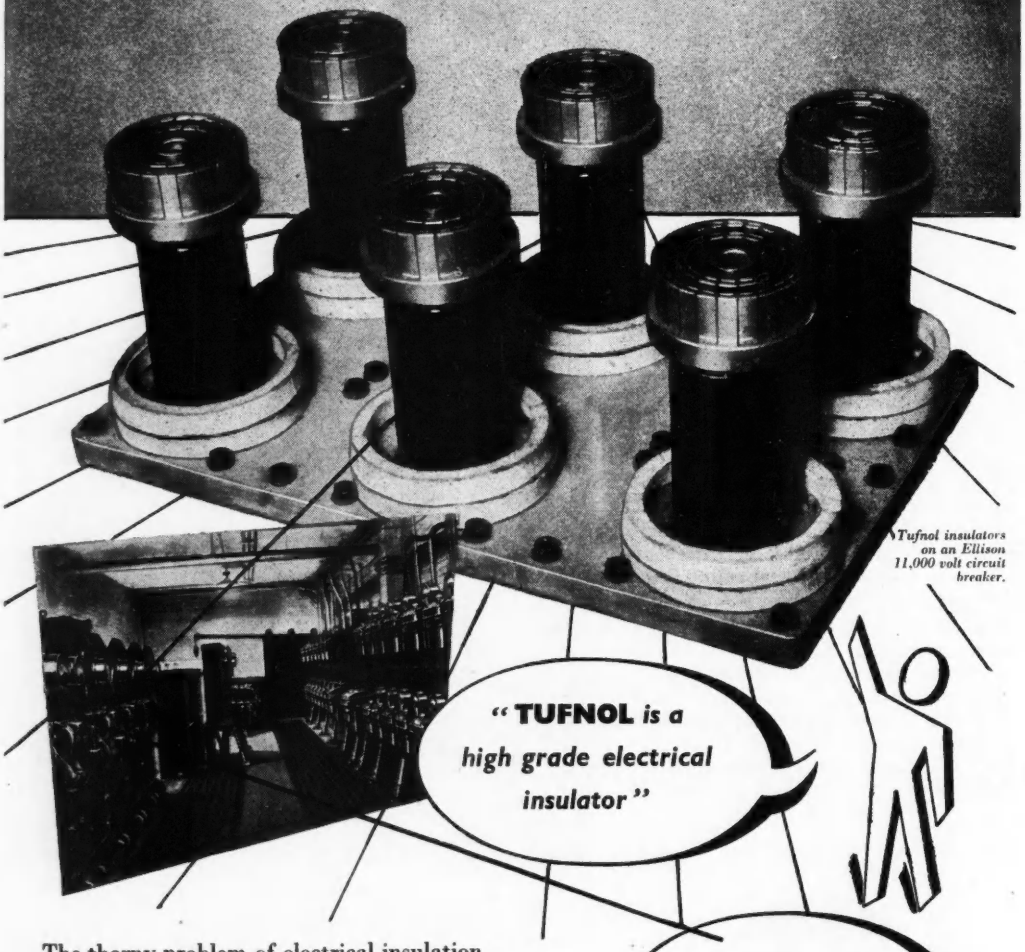

Tufnol insulators on an Ellison 11,000 volt circuit breaker.

"TUFNOL is a high grade electrical insulator"

Can TUFNOL improve your products or plant

The thorny problem of electrical insulation is solved immediately by the use of Tufnol. A high grade insulator, Tufnol is not brittle and has good mechanical strength.
Tufnol is used in every industry, not only as an electrical insulator but in thousands of other ways. Engineers are constantly solving their problems with the aid of Tufnol.

Our Engineers will gladly help you

TUFNOL

An ELLISON Product

TUFNOL LTD · PERRY BARR · BIRMINGHAM · 22B

225

Electronic Engineering

EDITORIAL, ADVERTISING AND PUBLISHING OFFICES, 28, ESSEX STREET, STRAND, W.C.2.

TELEPHONE: CENTRAL 6565 (10 LINES) *EDITOR:* H. G. FOSTER, M.Sc., M.I.E.E. *TELEGRAMS:* LECTRONING, ESTRAND, LONDON

Monthly (published last Friday of preceding month) 2/- net. Subscription Rate: Post Paid 12 months 26/-.

Vol. 21. No. 254 April, 1949

CONTENTS

C.R.T. Application in Photography 114
By C. Berkley and R. Feldt

Microwave Discrimination Circuit 120

Signal Noise and Optical Relation in Television Cameras By G. Liebmann, D. Phil., F.Inst.P. ... 121

Compensation for Wear in Magnetophone Recorder Head 124

The Practice of Printed Circuits ... By P. P. Hopf 125

New Electrical Engineering Building at Illinois 128

Leakage Inductance ... ... By N. H. Crowhurst 129

The Decca Navigator System in Oil Surveys 134

Ferro-Resonance ... By B. Drake, B.Sc., A.M.I.E.E. 135

Television for all / Televisor Booklet 139

Variable Frequency R.C. Oscillators 140
By F. Butler, B.Sc., M.I.E.E.

Notes from the Industry 143

April Meetings 144

Abstracts of Electronic Literature 145

Electronic Equipment at the R.C.M.F. Exhibition 146

Book Reviews 150

The R.C.M.F. Exhibition

ORGANISED by the Radio Component Manufacturers' Federation, the sixth exhibition of components, valves and test gear was held at Grosvenor House, London, from March 1 to March 3, with the object, to quote the Radio Industry Council, of "acquainting the radio and electronic manufacturers and engineers with the most recent advance in the design and development of British radio, television and electronic components, valves, accessories, radio and television test gear and instruments, and materials used in their manufacture."

For the first time the exhibition included valves and cathode-ray tubes and welcome new exhibitors were the Board of Trade to provide information on the export market and the Ministry of Supply whose display of apparatus developed in its research establishments was most interesting.

While the British manufacturers of radio receivers for export are making small demands on the component industry, the market for the export of components is encouraging. As Sir Robert Renwick stated in his opening speech, the present export trade has increased no less than eight-fold in the space of the last three years. Before the war the imports of radio components was greater than our exports, although both, of course, were on a comparatively small scale. In the three years since 1945 exports of radio components had risen from about £450,000 to over £3,500,000, while in the same period valve exports had risen from £750,000 to £2,000,000.

There can be no doubt therefore that the component industry is in a healthy position and it needs no more than a casual inspection of the exhibition to confirm this.

From the technical point of view there was much of interest. The design of the components was everywhere good, and on a sound engineering basis. Particular mention might be made here of the very excellent design of the potentiometers developed initially for radar purposes and now finding considerable application in electrical computer circuits.

The trend towards "miniaturisation" of components and valves continues with the consequent saving of materials and space, and a new aspect of "miniaturisation" is the appearance of multiple components—assemblies of resistors and capacitors into a single unit—of small bulk and high stability.

Altogether, therefore, an encouraging exhibition—our only comment is that with components and instruments finding application in so many new non-radio fields from watch rate recorders to vibration analysers, the term radio as applied to components seems a misnomer.

Cathode-Ray Tube Applications

Fig. 1. Typical shutter opening v. time characteristics. Shutter speed 1/100th of a second. Time markings one millisecond apart

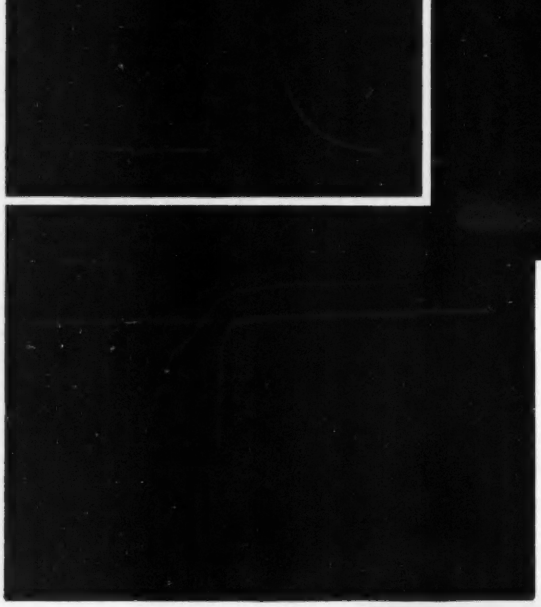

Fig. 10. Three triple-exposed H and D curves. The bottom curve shows the start of development and the top curve the final appearance of the strip

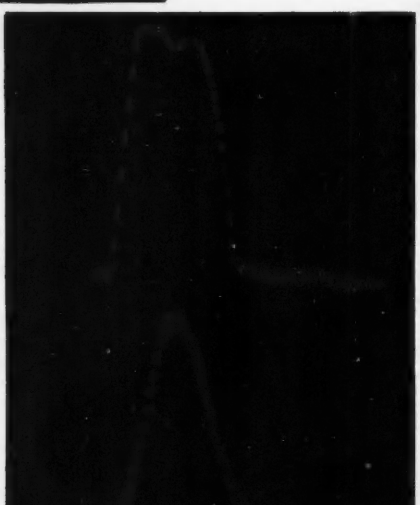

Above

Fig. 6. Electronic gas-filled flashlamp characteristics with high-speed sweep and 40 Kc/s (25 microseconds) time markings. The small negative pip is due to the synchroniser operation

Fig. 12. Double exposures comparing light from stroboscope lamp with light from cathode ray tube light source

Right

Fig. 4. Dual beam recording of 1/100th of a second shutter opening (top trace) and No. 5 flashbulb (bottom trace). Time markings 2 Kc/s

Fig. 5. Dual beam recording of 1/100th of a second shutter opening, plus electronic flashlight output. The time marking is given by a 40 Kc/s oscillator

in Photography and Optics†—Part 1

By CARL BERKLEY* and RUDOLF FELDT*

CATHODE-RAY tubes and oscilloscopes are ideal tools for the solution of many technical problems in the related arts of Photography and Optics. The methods described represent typical examples of the application of electronic measurement techniques in such fields.

Applications considered and illustrated include:—

1. Gloss measurement on photographic papers.
2. Goniophotometry of light sources.
3. Shutter, flashbulb and synchroniser testing.
4. Cathode-ray tube light sources for facsimile and stroboscopic work.
5. Scanning technique for television film recording.
6. The combination of optical and electronic magnification for the study of gear and sprocket imperfections.
7. Automatic "H and D" curve plotting during film development.
8. Cathode-ray tube sound on film recording systems.
9. The measurement of ripple in light sources.
10. Colour studies in natural colour reproduction and chromatic aberration in lenses.
11. Vibration studies of motion picture equipment.

The techniques and cathode-ray oscilloscope accessories described will find wide application in other fields as well.

Due mainly to its rapid response and graphic presentation of results, the cathode-ray oscilloscope has found wide application in the solution of many technical problems in diverse fields. In the course of their work the authors and the members of the Applications Engineering Section of DuMont Laboratories have gained considerable experience in the application of the basic oscillographic techniques used in the solution of these problems. Since photographic and optical methods have become increasingly important in oscillography, a surprising proportion of the applications studied at the laboratories have been in these fields. The techniques here described for photography and optics are basic and applicable to a much wider range of problems. To better illustrate this point, it will be shown later that many of the methods herein described will find direct application in the motor car industry. It is therefore felt that their description will be of interest and help to anyone concerned with a precise electronic approach to a measurement problem.

One of the basic problems in photography as in many other industries is that of accurate short-interval timing. Photographic shutters are called upon to operate reliably and reproducibly over a wide range of speeds. Synchronisers and flashbulbs must be timed to operate within milliseconds of one another. This problem of proper adjustment is becoming more important with the increasing use of colour films whose latitude does not tolerate the careless operation to which photographers using monochrome emulsions have become accustomed.

Shutter Testing

The obvious way to study and make these adjustments is by picking up the opening of the shutter by means of a photocell and light and displaying its output on an oscilloscope. This procedure was in fact, tried many years ago using a string or mirror oscilloscope with fairly satisfactory results.[1]

There are a number of advantages to be gained by the use of a cathode-ray oscilloscope:

(1) There is no practical limit on the shortest time that can be measured so that high-speed mechanical shutters or electro-optical shutters can be readily studied.

(2) The image of the shutter characteristic appears instantaneously on the face of the cathode-ray tube, so that no waiting is necessary to view the record.

(3) The shutter may be rapidly operated any number of times in succession, synchronised with the single sweep on the oscilloscope, and any erratic operation easily observed by comparing each pattern with the previous one by means of a long-persistence cathode-ray tube screen; by operating the shutter a few times and then observing the persistent image, an average value for the shutter speed may be obtained. This is of value in the case of simple shutters whose reproducibility is not such that a single reading suffices for calibration. Fig. 1 shows a typical opening *vs.* time curve.

(4) Various other electronic methods of testing camera shutters have been devised. These generally involve integrating the total light transmitted during the operation of the shutter, and expressing the result as a single reading on a meter. Such a reading fails to show any erratic operation of the shutter such as bouncing or slow opening and closing which, while it may give rise to the same integrated value of light, represents improper operation of the shutter. Such improper operation is readily displayed on the cathode-ray tube.

Realising all these advantages, many photographers to-day have devised elaborate oscillographic equipment to enable production testing of shutters.[2] Such equipments are now being used by most camera manufacturers to check their shutter operation.

The previous remarks have all referred to the testing of between-the-lens leaf-type shutters. The cathode-ray oscilloscope has also been applied successfully to the testing of focal plane shutters by a technique described by T. H. Bullock in "American Photography."[3] This technique involves the photographing of a vertical oscillator trace on the cathode-ray tube and the sweep of this trace horizontally across the cathode-ray tube for a time somewhat longer

† Based on a paper presented at the National Electronics Conference, November 5th, 1948.

* Allen B. DuMont Laboratories, 1000 Main Avenue, Clifton, New Jersey.

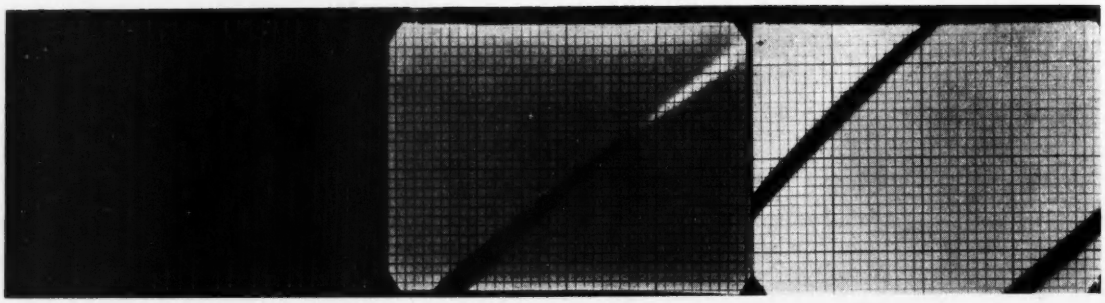

Fig. 2. Focal plane shutter characteristics. Shutter speed 1/20th of a second on Graflex shutter. Horizontal sweep approximately 1/20th of a second
(a) With low frequency vertical sweep approximately 600 cycles to show principle.
(b) Same shutter with higher speed vertical sweep, showing change in speed of slit from top to bottom of focal plane.
(c) Same shutter properly adjusted for uniform slit travel.

than the operation time of the shutter. This pattern is then imaged in the focal plane. The sum of the cathode-ray tube spot and focal plane slit motions gives rise to diagonal areas from whose appearance the shutter opening characteristics may be evaluated. Figs. 2(a), (b) and (c) show some typical examples of such operation on a Graflex shutter. Fig. 2(a) was made with a rather low vertical-oscillator frequency in order to illustrate the principle. The horizontal distance represents the time during which a particular portion of the slit traversed the film. This time can be seen to vary from one end of the focal plane to the other, indicating that the shutter did not move at constant speed. The next figure shows another example of this defect with a higher sweep frequency. Fig. 2(c) shows a properly-adjusted shutter which moves at almost constant speed from one end of the image plane to the other.

Flash Bulb Testing

Using almost exactly the same equipment, for example, an oscilloscope and a photocell pickup, many other applications present themselves in photography. For example, the testing of photographic flash bulbs and their light output *vs.* time characteristics, may readily be accomplished. Fig. 3 shows the setup for such tests. A method, using the same basic technique which was prescribed for shutters is now used as a standard ASA method for testing photographic flash lamps.[4] Fig. 4 shows a typical recording of the light output of a Mazda No. 5 lamp, produced on a Type 279 dual beam cathode-ray oscilloscope so that it may be compared for synchronisation directly with the shutter operation. The time markings have been produced by intensity modulating the cathode-ray tube grid from an external oscillator. The frequency is 2,000 cycles/sec. It is also possible to make recordings of the characteristics of a combustion type of flash lamp with a high-speed recording galvanometer. This equipment, however, fails when an attempt is made to measure the new gaseous-discharge micro-flash lamps, whose duration of light output may be of the order of a few microseconds; only a cathode-ray oscilloscope can measure times of such order conveniently. Fig. 5 compares relative duration of shutter and flash. The circuit for studying these phenomena can be a very simple one. The gas tubes usually have an ignition coil as an ancillary operating from a trigger circuit, consisting of a small, cold-cathode gas tube. The same pulse which fires the cold-cathode tube can be used to start the sweep of the oscilloscope. There is sufficient delay in the initiating tube so that the sweep starts before the ionisation in the flash tube becomes appreciable. The light output *vs.* time curve is shown in Fig. 6. The markers here are 25 microseconds apart instead of 1 millisecond. Fig. 7 shows dual beam oscillograms of such a photoflash tube in which a much higher shutter speed has been used, displaying the opening of the shutter and the flashing of the lamp unsynchronised and synchronised. These are made with a shutter that shows considerable rebouncing which, as mentioned previously, would not be indicated on an integrating type of shutter opening meter.

Gloss Measurement

One of the basic problems in optics is the proper description of the visual or optical character of a surface—the gloss of the surface. For this reason, in many industries, so-called "standards" of various degrees of gloss or surface finish are maintained. This problem is of importance in photography in con-

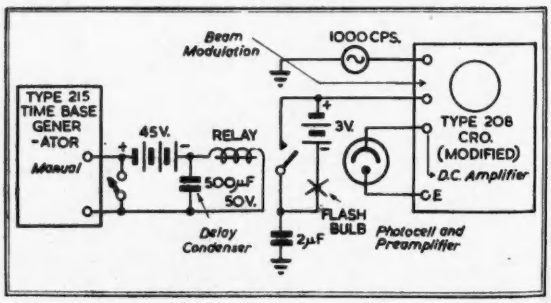

Fig. 3. Typical set-up for flashbulb testing

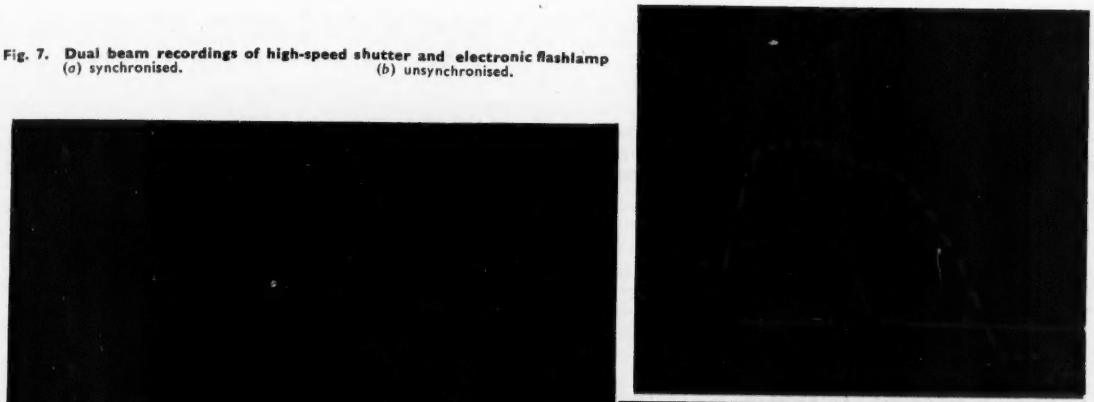

Fig. 7. Dual beam recordings of high-speed shutter and electronic flashlamp
(*a*) synchronised. (*b*) unsynchronised.

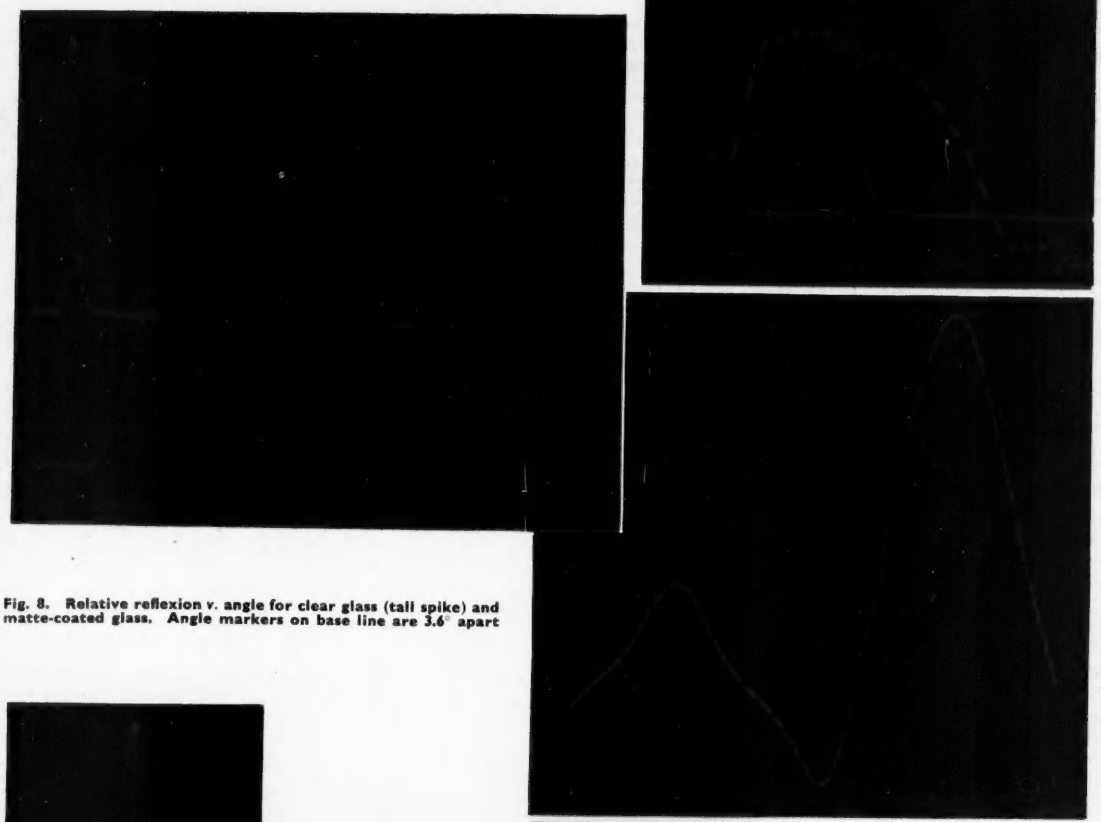

Fig. 8. Relative reflexion v. angle for clear glass (tall spike) and matte-coated glass. Angle markers on base line are 3.6° apart

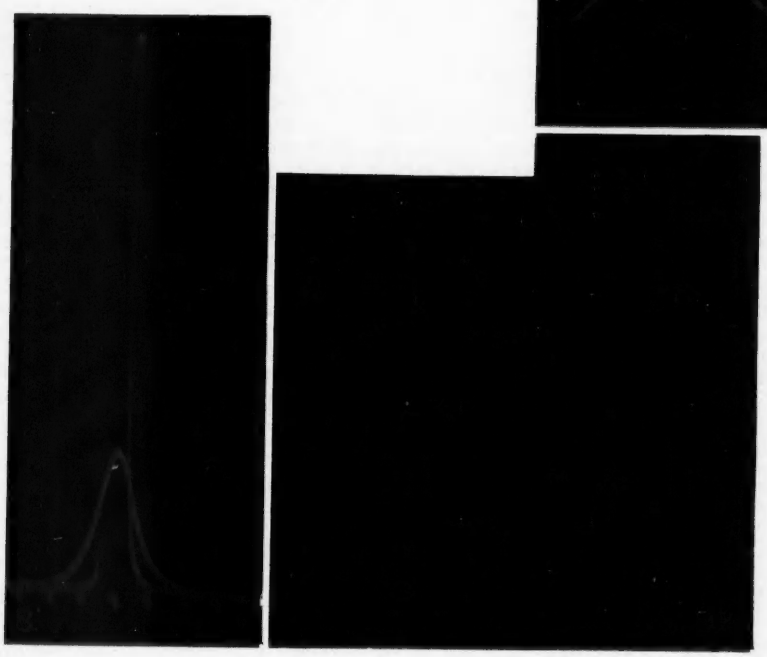

Fig. 9. Light distribution from small flashlight bulb
(*a*) In cartesian co-ordinates.
(*b*) In polar co-ordinates.

nexion with the proper specification of the surfaces on photographic papers. The so-called "feel" of the surface, being a subjective matter, is of extreme importance in the final effect that a photograph produces upon the viewer. However, no good method for specifying these surfaces which assures uniform quality and reproducibility yet exists. For this reason, in every photographic supply store there will be found so-called standard samples of these various surfaces which serve as no specification whatsoever. The only satisfactory way, to date, to specify the gloss of a surface is by drawing its complete reflectance curve as a function of the angle of view of the surface under certain standardised lighting conditions. This graph should preferably be plotted as a family of curves in order to express the effect throughout a solid angle. For cases where the reflexion is rotationally symmetrical about some point, a two-dimensional curve such as the curve on a cathode-ray oscilloscope is sufficient and offers a very convenient means for obtaining these curves quickly. This can be done by many simple means. For example, this graph may be obtained in cartesian co-ordinates merely by rotating the photocell around the sample illuminated in a standard fashion and expressing the output of the photocell on the vertical plates, and by expressing its position by means of a potentiometer geared to the photocell on the horizontal axis. This type of presentation has been duplicated by slower methods such as pen recorders. In some cases, however, it is desirable to do this very rapidly. For example, if there are a large number of samples, it is necessary, continually, to draw these distribution curves. This may be done readily by means of the following system, which also enables the use of a standard sample for comparison: Two samples, one the standard and the other under test, are mounted back to back and spun by means of a synchronous motor about the axis of the motor. At some angle arbitrarily chosen, or at 90°, a photocell and light source are placed. As the samples are rotated by the motor, the angle, at which the photocell alternately views the standard and the sample, changes continuously. The photocell output displayed with a synchronous sweep on a cathode-ray tube is then a graph of light reflexion as a function of the angle of view. Since the samples are presented alternately, the curves appear simultaneous and superposed to the observer.

Fig. 8 is a typical example of such a recording in which the reflexion from a clear sheet of glass is compared with that of a sample treated with glare-reducing material. By means of intensity modulation, using a synchronised multivibrator, 3° angle markers have been put on the baseline which was recorded by double exposure. This technique, as mentioned previously, should find wide application in any industry where surface specification is desired. With this type of presentation, changes of reflectance characteristic during a drying process can be seen. This method may also be reversed by moving the photocell rapidly around the sample and drawing a great many curves as the sample dries.

Polar Presentations

It is more conventional in optics to express these light-distribution patterns in the form of polar rather than cartesian co-ordinates. These patterns are generally used to describe the light distribution from lighting equipment such as photographic flood lamps. These patterns may be readily produced on cathode-ray oscilloscopes, such as the Type 275 polar co-ordinate indicator. This instrument produces polar diagrams which are synchronised with the motion of any rotating object merely by attaching the small lightweight, two-phase generator to the rotating part.[5] If a photocell is placed on the rotating shaft its output can serve as a measure of the amount of light reaching a certain point from all angles by applying the output of the photocell to the radial-input terminal on this indicator. Similarly, the light source may be rotated and the photocell remain stationary. Fig. 9(a) shows a cartesian light distribution obtained from a small flashlight bulb. Fig. 9(b) shows a similar light-distribution pattern in polar co-ordinates on the Type 275A indicator. Photocells and cathode-ray oscilloscopes have also been used to scan the illumination of scenes being photographed to depict graphically the variation between highlight and shadow brightness so that, for example, the contrast range of the recording film is not exceeded.[6]

Automatic "H and D" Curve Plotting

One of the best specifications for the behaviour of a photographic emulsion is its "H and D" curve which relates the photographic density to the logarithm of the exposure. These curves are generally produced by exposing either a stepped or continuously graded logarithmic variation of exposure along a strip of film, which is then processed in the usual manner. The dry film is examined by means of a densitometer and the results plotted on graph paper. This procedure is quite laborious and time-consuming. The shape of the "H and D" curve and its slope (the gamma) is affected widely by the conditions of development.

In cases such as in motion-picture processing where it is desirable to develop to constant gamma in the face of increasing exhaustion of the developer, sensitometric strips are frequently included every few hundred feet so that the development may constantly be checked, at least visually. This check would be much more useful if the actual curves were drawn as each strip passed through the developer so that the development could be shortened or prolonged as required.

Such an "H and D" curve can easily be plotted by having the strips pass through an infra-red light beam to a photocell while in the developer. The resultant variation in density is displayed on a cathode-ray tube.

We have produced such an "H and D" curve experimentally by examining the reflexion from a sheet of paper exposed from an Eastman circular step wedge. The resultant "H and D" curves obtained at three different times during development are shown in Fig. 10. The experimental setup used appears in Fig. 11. The exposed strip was mounted co-axially with a potentiometer, which produced horizontal positioning as the exposed sheet was rotated in a tray of developer. The wedge was illuminated by

Fig. 11 (*left*). Experimental setup in darkroom sink

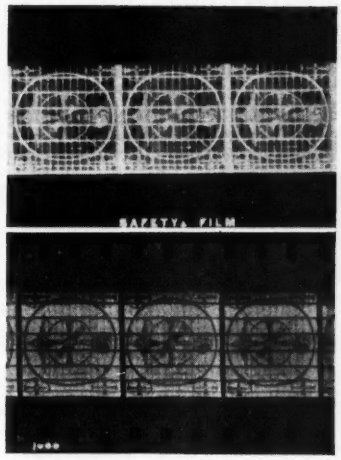

Fig. 14 (*right*). Negative and positive television film recording made with a continuous motion camera





Fig. 13 (*below*). Photographs of a wire rotating at high speed, made with: (a) (*left*) a stroboscope lamp and (b) (*right*) a cathode-ray tube light source. The circle encloses the same wire in both cases

means of the vertical lamp which produced a small spot of non-actinic light on the paper. The reflexion was plotted as a negative vertical deflection. The sharp peaks in the pattern are due to the black lines separating the various steps in the wedge.

Cathode-Ray Tube Light Sources

Present photographic flashlamps are gas-filled tubes and therefore limited with respect to the shortest flash that they can produce, mostly because of the finite velocity of the gas particles. Since cathode-ray tubes are vacuum tubes, they are not subject to these limitations. By the use of phosphors having extremely short build-up and decay times, such as zinc oxide, it is possible to produce very short light pulses. Several experimental cathode-ray tubes for use in producing these short light pulses have been built in connexion with the relaying of video information over light beams.[7] In order to demonstrate the capabilities and advantages of such cathode-ray tubes over conventional lamps for stroboscopy at high speeds, the light output *vs.* time characteristics of such a cathode-ray tube have been compared oscillographically with that of the light from a gas stroboscope lamp. The results are shown in Figs. 12 and 13. Fig. 12 shows on the same time base the oscillogram of a 2-microsecond flash from a cathode-ray tube (a small spike) and the comparatively long light output from a stroboscope. Not only is the stroboscope flash much longer in duration, but it also rises and falls much less steeply and tends to oscillate. The effect of these light sources on a photograph is shown in Fig. 13. These two photographs are pictures of a wire being rotated at high speed by means of a synchronous motor. The picture taken by means of the stroboscope is seen to correspond roughly to the oscillogram and to have both leading and trailing edges blurred while the photograph made with the cathode-ray tube light source is acceptably sharp. Such cathode-ray tubes, capable of being modulated with high frequencies, also have been used successfully to replace the gas crater glow modulator tube which is capable of modulation up to only about 15 Kc/s. These tubes have been successfully modulated at frequencies up to 10 Mc/s.

An oscilloscope with a single sweep beam blanking circuit can be converted into a stroboscope of somewhat limited usefulness by the use of a short-persistence cathode-ray tube. The length of each light pulse may be controlled by setting the sweep speed. For studying electrical or other machinery, it is frequently possible to obtain a synchronising signal, connect it to the synchronising signal input on the oscilloscope and have a workable stroboscope for illuminating small areas. A further advantage is the possibility of using the cathode-ray tube, both as a stroboscopic light source and as a view-

ing tube to study simultaneously the electrical and mechanical characteristics of some machine or circuit. A further refinement lies in the use of a double beam tube in which one beam acts as a stroboscopic light source, the other beam as a conventional cathode-ray oscillograph. The advantage here is that very much higher speed phenomena may be studied than is presently possible with gas tube stroboscopes.

By the use of such short decay and build-up phosphors, it is also possible to make continuous recordings of television programmes from a cathode-ray monitor tube, for example, by merely using the film motion as the vertical sweep and allowing it to spread a complete record of each frame of the television picture along the length of the film. Fig. 14 shows two recordings made in this manner with a Type 314 oscillograph - record camera. There are here no complications due to the differences in frame frequency and shutter frequency since no shutter is used on the camera. The same method is used in the present "Ultrafax" facsimile recording system.

(To be continued)

Bibliography

[1] J. B. Neblette, "Photography," *D. Van Nostrand*, pp. 152-153. 1927.

[2] T. H. Bullock, "Testing Shutters With the Cathode-Ray Oscillograph," *American Photography*, p. 24. September, 1944.

Van Liempt and de Vriend, "Testing Focal Plan Shutters with the Help of the Cathode-Ray Oscillograph," *Physica*, pp. 811-827. October, 1937.

[3] American Standards Association, "Method of Determining Performance Characteristics of Between-the-Lens Shutters Used in Still Picture Cameras," Z52.63. 1946. Approved January 18, 1946.

American Standards Association, "Method of Determining Performance Characteristics of Focal Plane Shutters Used in Still Cameras," Z52.65. 1946. Approved January 24, 1946.

D. T. R. Dighton and H. McGross, Jr., "Cathode-Ray Tube Shutter-testing Instrument," *Scientific Instruments*, Vol. 24 No. 5, pp. 128-133. May, 1947.

R. F. Redemske, "Electronic Shutter-Testers," *Electronics*, Vol. 11 No. 1, pp. 26-27. January, 1938.

D. T. R. Dighton, "An Electronic Shutter Tester," *Electronic Engineering*, p. 251. August, 1948.

L. Kalman, "A New Method of Testing Photographic Shutters," *Schweizer Archiv.*, pp. 175-181. 1945. Photostat, German.

[4] American Standards Association, "Lamps: Photographic, Flash," Z52.43. 1944. W—L-122. February 2, 1945.

[5] M. Maron and M. B. Kline, "The DuMont Type 275-A Cathode-Ray Polar-Coordinate Indicator," *The Oscillographer*, Vol. 9, No. 5. September-October, 1947.

[6] E. R. Thomas, "A Portable Brightness Distribution Photometer," *Journal of Scientific Instruments*, Vol. 23, p. 187. August, 1946.

[7] "Television on Modulated Light Beam," *Tele. Tech.*, pp. 96-97. January, 1947.

Microwave Discriminator Circuit

A COMMON form of frequency discriminating device is the arrangement employing stagger tuned circuits. In this device two circuits are tuned so as to resonate respectively at two more or less closely adjacent frequencies and the circuits feed associated rectifiers whose outputs are combined in opposition.

When such a circuit is required for operation at centimetre wavelengths it is natural to use resonators of the cavity type rather than tuned circuits of lumped form. The use of cavity resonators, however, enables the arrangement to be simplified to a striking degree insofar as it becomes possible to replace the two separate cavities by a single cavity. In this single cavity the source of excitation is so coupled as to set up two component oscillations of the cavity of differing mode. These modes take the place of the simple vibrations of the separate circuits in the normal arrangement, and the natural frequencies of the modes are thus selected accordingly. Furthermore the cavity is arranged so that each component oscillation separately excites a rectifier. The remainder of the circuit is normal and the outputs of the rectifiers are combined in opposition in standard fashion.

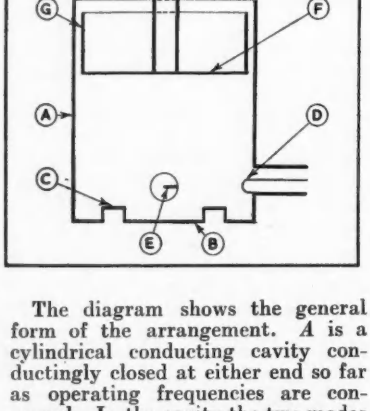

The diagram shows the general form of the arrangement. *A* is a cylindrical conducting cavity conductingly closed at either end so far as operating frequencies are concerned. In the cavity the two modes of vibration are established, one as a transverse electric type, and the other as a transverse magnetic type. These may be those known conventionally by the notation $TE_{0,1}$ and $TM_{1,1}$ respectively. If the cavity were of the form of a perfect right circular cylinder the natural frequencies of such modes would be identical. The frequencies, however, are made somewhat different by arranging on the end wall *B* a raised conducting annulus *C* coaxial with the axis of the cavity. This annulus has the effect of slightly reducing the length of the cavity so far as the transverse electric wave is concerned, but does not significantly modify it in relation to the transverse magnetic wave. The two modes are excited by a single exciting loop not shown in the diagram, but which is inclined to the axis of the cavity. Output loops *D*, *E*, feeding separate rectifiers are arranged so that each couples to its respective mode and not to the other. In the instance of the transverse magnetic mode the plane of the coupling loop lies parallel to the axis of the cavity and in the transverse electric mode the plane of the loop is disposed perpendicularly to the axis of the cavity.

As will be seen in the drawing, the end of the cavity opposite to the annulus *C* is closed by a piston *F* which can be moved along the axis of the cavity for the purpose of tuning the cavity as a whole. The piston does not touch the walls of the cavity, but has a skirt *G* which is spaced a small distance from the cavity wall and extends for a quarter of a wavelength parallel to the axis of the cavity, so that in effect the edge of the piston face is short circuited to the wall of the cavity.

Obvious uses of the device are in the normal stabilisation and control of frequency of oscillators. The discriminator may, however, be adapted as a self-tuning cavity whose mean frequency locks automatically to an injected signal. In this manner it may be developed as a self-tuning "echo box" for the monitoring of radar equipment when real targets are not available, as may happen at sea. Another use for the circuit is in the frequency modulation of microwave oscillators. When arranged for this purpose an oscillator may be controlled by the discriminator and its frequency will then follow any small change in the length of the cavity.

—Communication from E.M.I.

Signal Noise and Optical Relations in Television Cameras

By G. LIEBMANN, D.Phil., F.Inst.P*

EARLY television broadcasts were all made from the studio. This was not only due to the absence of such facilities as radio-links and outdoor broadcasting vans, but just as much to the lack of sensitivity of the early types of television pick-up tubes. The position has changed meanwhile, and the earlier discussion of the optical relations in television cameras, due to De Vore and Iams,[1] will be extended in this article to the problem of outdoor broadcasting and long-range television work.

"Noise" Considerations

The signal strength of the received television image must be high enough to make the background noise negligible by comparison. The signal/noise ratio e_s/e_N may be called satisfactory if it has a value of 40 db., although a value of 50 db. is desirable in half-tone pictures. As we are here only interested in the problem of the television *camera*, we can disregard the additional sources of "noise" noticed in the received picture. The following considerations will be based on a signal-to-noise ratio of 40 db. at the television camera output.

The noise associated with the pick-up tube is due to three main components, *viz.*, the random fluctuations (i_t^2) of the pick-up tube current i_s, the noise voltage appearing at the load resistor R_a of the pick-up tube (e_t^2), and the noise originating in the circuits of the first amplifier stage (e_a^2), expressed by its "equivalent noise resistance" R_{eq}. The other sources of noise in the amplifier can usually be neglected.

These well-known relations apply:

$$i_t^2 = 2ei_s df, \text{ and}$$

$$e_t^2 = i_t^2 R_a^2, \text{ or}$$

$$e_t^2 = 3.2 \times 10^{-19}\, R_a^2 i_s df \quad \ldots\ldots (1)$$

$$e_t^2 = 1.6 \times 10^{-14}\, R_a df \quad \ldots\ldots (2)$$

$$e_a^2 = 1.6 \times 10^{-14}\, R_{eq} df \quad \ldots\ldots (3)$$

i_s in μA, df in Mc/s., R_a, R_{eq} in ohms.

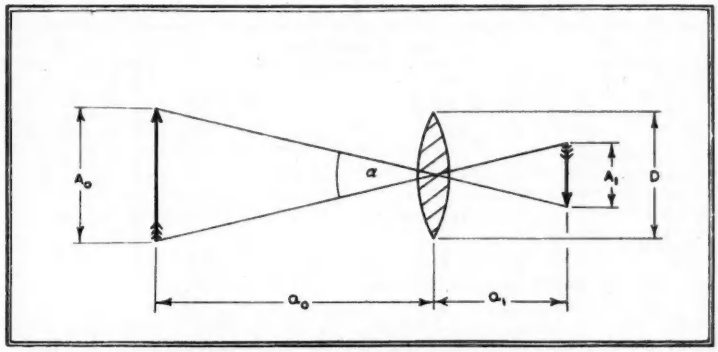

Fig. 1. Geometrical relations in camera

Symbols Used

a_0	= average distance of scene from camera (ft.)
A_0	= width of scene (ft.)
α	= viewing angle ($\tan\alpha/2 = A_0/2a_0$)
A_1	= width of photocathode or mosaic (inches)
f	= focal length of lens (inches)
D	= diameter of lens diaphragm (inches)
F	= f-number of lens ($F = f/D$)
$\triangle$	= depth of focus (ft.)
H	= hyperfocal distance (ft.)
t	= transmission factor of lens
B	= surface brightness of televised objects (candles/ft^2.)
L	= light flux falling on photocathode or mosaic (lumens)
σ	= "overall" pick-up tube sensitivity (μa/lumen)
N	= number of scanning lines in television picture
df	= bandwidth of pick-up tube amplifier (megacycles/s)
i_s	= signal current delivered by pick-up tube (μA)
e_s	= signal voltage
e_N	= noise voltage
Ra	= load resistor in pick-up tube output circuit (ohms)

The total noise voltage is then $e_N = (e_t^2 + e_a^2 + e_s^2)^{\frac{1}{2}}$, and the signal/noise ratio e_s/e_N becomes:

$$e_s/e_N = 10\, i_s R_a\, [3.2 \times 10^{-5} R_a^2 i_s + 1.6\ (R_a + R_{eq})]^{-\frac{1}{2}}\ (df)^{-\frac{1}{2}} \quad \ldots\ldots (4)$$

The signal/noise ratio is given in Table I for a few representative values of i_s and R_a, for a standard bandwidth of 1 Mc/s. and R_{eq} = 500 ohms.*

i_s (μA)	R_a (ohms)	e_s/e_N (db.)
0.1	10^5	40
0.1	10^6	34
0.1	10^7	20
1	10^5	54
1	10^6	40
1	10^7	34
10	10^5	60
10	10^6	54
10	10^7	40

This table demonstrates that for small signal currents (less than 0.1 μA) the noise is mainly due to the load resistor R_a. In this noise calculation, no account is taken of any noise introduced by the electron multiplying stages of pick-up tubes incorporating secondary electron multiplication of the primary photo-electric current. The signal/noise ratios given in the two last lines of Table I, which apply at present only to secondary multiplier pick-up tubes, are therefore higher than can be expected in practice. Further, it is not yet known how far Equation (1) applies in the case of a mosaic electrode.

A graph of the signal/noise ratio following from Equation (4) is given in Fig. 2 for several values of load resistor R_a, for 1 Mc/s. bandwidth. If the amplifier bandwidth is greater than 1 Mc/s. the corresponding values, in db., listed in Table II have to be subtracted from those shown in the graph, Fig. 2, for the values of i_s and R_a selected.

The greatest resistance value R_a which can be used is approximately given by the relation $R_a df$ = constant[2]. The value of this constant depends on the type of amplifier circuit used, on the shunt capacitances of pick-up tube output and amplifier input, and on the required degree of "flatness" of the frequency response of the amplifier. For a compensated wide-band amplifier of 1 Mc/s. bandwidth a value of $R_a = 10^5$ ohms would seem to be already fairly

* In a more accurate treatment of the signal noise problem, the shunting effect of the input capacitance Ci of the amplifier would have to be included, leading to the replacement of Req by $\mathrm{Req}\left(1 + \frac{4\pi^2}{3}\ \mathrm{Ra^2Ci^2df^2}\right)$. The influence this correction term is negligible, with the values of Ci and df used in modern practice, except when Ra has a very high value, of the order of 10^5 to 10^6 ohms. Even in this case the signal/noise ratio will be within 1 or 2 db. of the values listed in Table I, which is based on eqn. (4).

* Formerly Cathodeon Ltd. (Pye Ltd.), now Associated Electrical Industries Ltd., Research Laboratory, Aldermaston.

TABLE 1

i_s (μa)	$R_a = 10^3$ ohms		$R_a = 10^4$ ohms		$R_a = 10^5$ ohms		$R_a = 10^6$ ohms	
	e_S/e_N	db	e_S/e_N	db	e_S/e_N	db	e_S/e_N	db
0.001	0.2	−14	0.8	−2	2.5	+8	7.8	+18
0.01	2	+6	8	+18	25	28	72	37
0.1	20	26	79	38	23×10^1	47	46×10^1	53
1	20×10^1	46	71×10^1	57	14×10^2	63	17×10^2	65
10	19×10^2	65	45×10^2	73	55×10^2	75	56×10^2	75

TABLE 2

df (Mc/s.) ...	1	1.5	2	2.5	3	4	5	10	
db	0	1.8	3	4	4.8	6	7	10	Ra = const.
db	0	3.5	6	8	9.5	12	14	20	Radf = const.

high, and R_a = .25 Megohms about the maximum practicable value, if the need for excessive compensation be avoided.

For a 405-line 50-frames interlaced picture with an aspect ratio of 5:4, the amplifier bandwidth would have to be about 2.5 Mc/s. From the graph, Fig. 2, and Table II, row 3, we see that we would then require a signal current of i_s = 0.08 μA for a "satisfactory" picture (e_s/e_N = 40 db.), the maximum value of the load resistor being $R_a = 10^5$ ohms.

Pick-up Tube Sensitivity and Choice of Lens System

We have now to consider how we have to choose the optical system of the television camera to obtain the required signal current of 0.08 μA with modern pick-up tubes.

The total light flux reaching the photo-cathode or mosaic is

$$L = \frac{\pi B\, t\, A_1^2}{4 \times 144 \times F^2} \text{ lumens}$$

The transmission coefficient t of the lens depends on the number of glass-air interfaces in the lens, and may be anything between .3 and .8, being mostly near .5 in high speed lenses. For sake of simplicity, we assume t = .46, as this makes the numerical factor $\pi t/144 = 1/100$.

Hence

$$L \approx \frac{B\, A_1^2}{400\, F^2} \text{ lumens} \quad \ldots\ldots (5)$$

In using this formula, the angle subtended by the scene can be calculated from the used width of the photo-cathode A_1, the focal length f and the speed F of the lens, with the help of the relation

$$\tan \alpha/2 = \frac{A_1}{2f} = \frac{A_o}{2a_o} \quad \ldots\ldots (6)$$

The effective lens diameter (diaphragm) of the lens is given by

$$D = f/F. \quad \ldots\ldots (7)$$

Equation (5) can therefore be written in these alternative forms which are often more convenient to use:

$$L \approx \frac{B\, A_1^2 D^2}{400 f^2} \text{ lumens}, \quad \ldots\ldots (8)$$

or

$$L \approx \frac{B}{100} D^2 \tan^2 \alpha/2 \text{ lumens}. \quad \ldots\ldots (9)$$

The signal current i_s is then:

$$i_s = \sigma L\ \mu\text{A} \quad \ldots\ldots (10)$$

where σ is the "overall sensitivity" of the pick-up tube in μA/lumens.

The "overall sensitivity" σ is the product of these three factors: (i) primary photo-sensitivity of photo-cathode or mosaic, (ii) internal efficiency factor, and (iii) secondary electron multiplication factor (if applicable).

The internal efficiency factor of the iconoscope type of pick-up tube is of the order of 1 per cent to 3 per cent, whereas it is near 50 per cent in the orthicon type of tube.

TABLE 3

Type of Tube	(μA/lumen)	Reference
Iconoscope } Emitron	0.3	3)
Super-emitron	4	4)
Orthicon	4	5)
Image-orthicon	400	6)

AVERAGE OVERALL PHOTO-SENSITIVITY

The overall sensitivity σ varies from tube to tube, and depends also on the operating conditions of the pick-up tube and on the level of illumination reaching the tube, falling off with increased illumination. For low illumination levels, these *average* values of σ can be assumed for the different types of present-day pick-up tubes (Table III):

To obtain a satisfactory output signal (e_s/e_N = 40 db.) in a 405 line television system ($df \approx 2.5$ Mc/s., $R_a = 10^5$ ohms) these quantitative relations must then be fulfilled:

$$B\, D^2 \tan^2 \alpha/2 \geqq$$

27 iconoscope, emitron
2 super-emitron, orthicon
0.02 image-orthicon ..... (11)

In this equation, B is measured in candles/ft^2 and D in inches.

In studios, a surface brightness of about 100 candles/ft^2 is usually

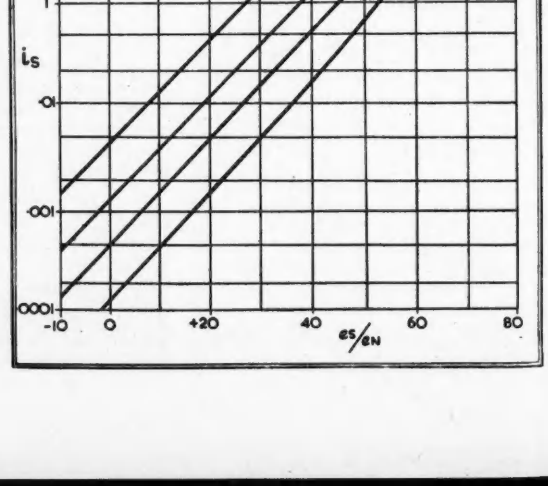

Fig. 2 Signal/noise ratio (db) as function of pick up tube current for several values of load resistance R_a (equivalent noise resistance of first valve R_{eq} = 500 ohms)

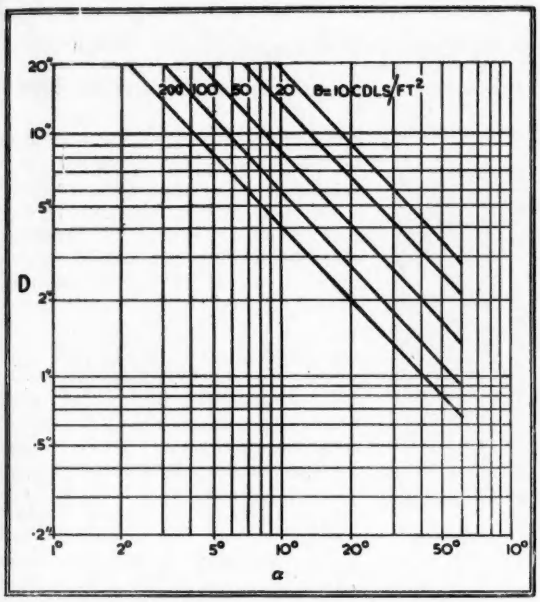

Fig. 3. Minimum diameter D of lens diaphragm as function of viewing angle α of iconoscope camera for several values of object brightness B. df=2.5 Mc/s. $R_a = 10^5$ ohms

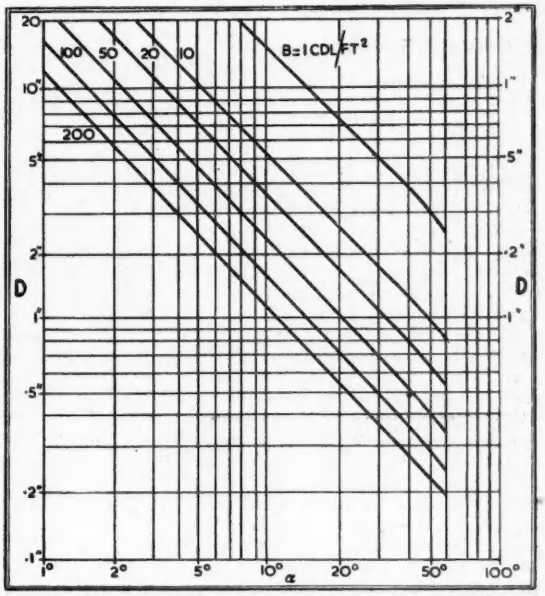

Fig. 4. Minimum diameter D of lens diaphragm as function of viewing angle α for several values of object brightness B. Left-hand scale D—super-emitron. Right-hand scale—image orthicon df=2.5 Mc/s. $R_a = 10^5$ ohms

obtained in the high levels. In outdoor broadcasts, the surface brightness level varies considerably, between 1 candle/ft² and 1,000 candles/ft².* Under "normal" daylight conditions, B will be between 10 and 200 candles/ft² in the open.*

Diagrams of lens sizes required for different levels of surface brightness and different sizes of the angular field covered by the television camera, based on Equation (11), are given in Figs. 3 and 4. Fig. 3 refers to iconoscope or emitron cameras and Fig. 4 to super-emitron or orthicon cameras (left-hand scale) or to image-orthicon cameras (right-hand scale).

The diagrams, Figs. 3 and 4, are based on a pick-up tube amplifier bandwidth of 2.5 Mc/s., and a load resistor of $R_a = 10^5$ ohms. The lens sizes or viewing angles possible with television systems employing a different bandwidth can be easily obtained from these diagrams with the help of the relations:

$$D \tan\alpha/2 = k_1(df)^{-\frac{1}{2}} \quad \text{for } R_a = \text{constant} \quad (12)$$

$$D \tan\alpha/2 = k_2(R_a)^{-\frac{1}{2}} \quad \text{for } df = \text{constant} \quad (13)$$

* The surface brightness B in candles/ft² of a flat object is connected with the numerical value, in foot-candles, of the incident illumination I by the formula $B = RI/\pi$, where R is the reflexion coefficient of the object surface; as a rough guide, B will therefore have a numerical value which is about 1/10 of the numerical value of the incident illumination in foot-candles.

following from the condition of keeping the signal/noise ratio constant. For a given viewing angle, the lens diameter D will therefore have to go up, in high definition systems, in proportion to the number of scanning lines employed.

In using the diagrams, Figs. 3 and 4, the required width A_1 of the photocathode can be determined from the viewing angle α and the effective lens diameter D, once the focal length f or the lens speed F has been chosen, or the required focal length f and lens speed F can be obtained from the given size of the photocathode or mosaic. Alternatively, the minimum viewing angle which can be obtained for a given brightness and given dimensions of lens and photocathode may be worked out.

If the overall sensitivity σ of the pick-up tube should be materially different from that listed for this type in Table III, the graphs, Figs. 3 and 4, can still be used if corrected with the help of the formula

$$\sigma D^2 \tan^2\alpha/2 = \sigma_0 D_0^2 \tan^2\alpha_0/2, \quad (14)$$

where σ, D and α are the corrected values, σ_0 the value of σ listed in Table III and D_0 and α_0 the values of D and α taken from the graphs.

With the help of Equation (11) we can also answer the question of how the optical system of the television camera must be adjusted to give the same resolving power as the human eye. This resolving power is approximately 1.5 minutes. The viewing angle of a 405 lines television picture giving the same resolution, *i.e.*, 1.5 minutes per picture element, is then $= 10^\circ$, about one-fifth of the viewing angle of the human eye. As $\tan\alpha/2 = .087$ in this case, we have

$$B D^2 = \begin{cases} 3600, \text{ iconoscope, emitron} \\ 260, \text{ super-emitron, orthicon} \\ 2.6, \text{ image-orthicon} \end{cases} \quad (15)$$

Equation (15) indicates that the iconoscope type of tube would require a lens of 6 in. diameter to transmit satisfactorily objects of the relatively high surface brightness of 100 candles/ft², and impracticably large lenses for objects of lower brightness. The super-emitron camera and the orthicon tube could give the required resolution with reasonably sized lenses even under fairly bad lighting conditions.

The problem becomes rather more difficult if the television camera is used as a *telescope*, giving a "close-up" view of a distant object. If we require the television camera to reveal as much detail as a good pair of field glasses, magnifying 10×, our

relation would be

$$B D^2 = \begin{cases} 2.6 \times 10^4, & \text{super-emitron, orthicon} \\ 260, & \text{image-orthicon} \end{cases} \quad \ldots\ldots (16)$$

We see that tubes of the high sensitivity of the super-emitron or orthicon cannot transmit such a telescopic picture satisfactorily under the best lighting conditions, even if a large diameter mirror optical system (Schmidt camera) were used. However, if we reduce our requirements to an " acceptable " signal-to-noise level of 20 db., a telescopic picture (10× enlarged) could be transmitted at the highest levels of outdoor illumination with ordinary lenses of large diameter (4 in. to 6 in.), whereas a Schmidt camera with a 12 in. mirror would allow " acceptable " transmission of objects of a surface brightness of about 20 candles/ft^2. The best answer yet to the problem of telescopic television cameras is therefore the use of pick-up tubes of the image-orthicon type.

The small viewing angles needed in telescopic television cameras would require the development of special pick-up tubes which can give high resolution with small photo cathode areas, to obviate the use of quite impracticable optical systems. Tubes of the super-emitron type and the image-orthicon type would lend themselves particularly well to this purpose, as the "image converter" section can be designed to enlarge a small section of the photocathode electronically, eliminating the loss of resolution inherent in small sized mosaics. To give a practical example, the telescopic television camera giving a magnification of 10× would require a viewing angle of $\alpha = 1°$. If the photocathode had a diameter of 1 in., as found in some recent pick-up tubes, the focal length of the camera lens would have to be 58 in. By making the used width of the photocathode only .2 in., increasing at the same time the electronic magnification of the image converter section by a factor of 5, the focal length of the camera lens could be reduced to (58/5)in. = 11.6 in. If the effective lens diameter D is kept as great as for the 58 in. lens, the same light flux would be collected, and the same signal level obtained as with the larger cathode and longer focus lens.

The graph, Fig. 2, taken together with Tables II and III, or graphs, Figs. 3 and 4, and Equations (5) to (13) allow the working out of all optical questions arising in television camera work, except those where the limited depth of focus near the camera must be taken into consideration, *i.e.*, in studio scenes and in foreground scenes outdoors.

For completeness, we note therefore these formulæ for the hyperfocal distance H (distance from which all objects are in focus if the camera is focused on infinity) and the depth of focus Δ (range over which the image is sharply focused), under the assumption that the largest tolerable disk of confusion has the size of one picture element ($\delta = A_1/N$):

$$H = \frac{f D N}{12 A_1} = \frac{D N}{24 \tan \alpha/2}, \quad \ldots (17)$$

and

$$\Delta \approx \frac{2a_o^2}{H} \text{ for scenes near the camera } (a_o^2 << H^2). \quad \ldots\ldots (18)$$

The near focus limit is

$$a_o' = \frac{H a_o}{H + a_o}, \quad \ldots\ldots (19)$$

and the far focus limit

$$a_o'' = \frac{H a_o}{H - a_o} . \quad \ldots\ldots (20)$$

In these formulæ, f, D and A_1 are measured in inches, the distances in feet.

Our discussion of the optical relations in television cameras has demonstrated that the photo-electric sensitivity of the pick-up tube plays an all-important part in television. The recent introduction by the B.B.C. of the new C.P.S. Emitron camera tubes has brought the practical proof through the greatly increased range and quality of outdoor television broadcasts, as witnessed by the very successful transmission of the Olympic Games events.

References

[1] H. B. De Vore and H. Iams, *Proc. I.R.E.*, **28**, 369. 1940.

[2] F. E. Terman, " Radio Engineering," Chap. V. (McGraw-Hill Book Company, Inc., New York, 1937.)

[3] V. K. Zworykin, G. A. Morton, and L. E. Flory, *Proc. I.R.E.*, **25**, 1071. 1937.
R. B. Janes and W. H. Hickok, *Proc. I.R.E.*, **27**, 535. 1939.

[4] J. D. McGee and H. G. Lubszynski, *Journ. I.E.E.*, **84**, 468. 1939.

[5] H. Iams and A. Rose, *Proc. I.R.E.*, **27**, 547. 1939.

[6] A. Rose, P. K. Weimer and H. B. Law, *Proc. I.R.E.*, **34**, 424. 1946.

[7] H. Iams, R. B. Janes and W. H. Hickok, *Proc. I.R.E.*, **25**, 1010. 1937.

Compensation for Wear in a Magnetophone Recorder Head

SOUND recorders of the magnetophone type make use of two oscillatory currents in the recording head. One of these currents is the audio frequency modulating current that effects the magnetisation of the recording tape. The other is the high frequency current whose function it is to overcome the effect of magnetic hysteresis in the tape. It is found in practice, however, that the continual passage of the tape between the pole pieces of the head wears the pole pieces, so modifying the flux between them and reducing the effectiveness of the high frequency current. To surmount this difficulty it has been customary to increase the high frequency current fed to the head as the pole pieces wear.

In order to avoid the necessity of such periodic adjustment a simple scheme has been derived by which the adjustment is achieved automatically and, moreover, in a continuous manner so that the action of the high frequency current on the tape is maintained always the highest possible.

The scheme depends on the use of a compensating capacitor whose capacitance operates to tune out the inductance of the high frequency windings of the head. This use in itself is standard practice and is necessary to obtain a large current in the windings. However, what has now been effected is to tune the high frequency windings not to resonance but to some frequency slightly below resonance by employing a slightly larger tuning capacitor. This being so, as the pole pieces wear and the inductance of the windings is in consequence gradually reduced, the windings by a continual process come more into resonance and the current in them is steadily increased as desired.

The scheme is equally effective as applied to the erasing head where a similar high frequency current is used for removing existing magnetisation of the tape.

—Communication from E.M.I., Ltd.

The Practice of Printed Circuits

By P. P. HOPF*

RECENTLY expressed opinion on the printed circuit technique and its uses in the electronic industry has shown that there is considerable and widespread misunderstanding not only of possibilities, but mainly of its use as an aid to the electronic constructor.

A number of publications, particularly on techniques developed in the U.S.A., have tended to create the impression that the printed circuit itself is a "throw-away" unit. Such a unit is obviously not fitted for the European market, and while mass production at a cheap rate of "throw-away" units might enter the American market, developments in Britain have not been on these lines. The printed circuit technique, as developed here, is a new technique requiring new ancillary operations of a circuit layout or sub-assembly in which parts are replaceable and which can be mended or repaired.

The object of this article is not to give instances where this technique can be used in design and construction of circuits, but to inform the electronic engineer on the nature of the tool that has been offered to him, and on the way it should be handled and treated.

The orthodox technique of constructional assembly may be regarded for the purpose of this argument to consist of metal or plastic chassis on which premanufactured components such as valves, coils and resistors and capacitors are connected and fixed by means of wires, screws and rivets, using the soldering iron or the screwdriver. Indeed, a large industry has developed in the premanufacture of such components, and each component is regarded as being manufactured within certain tolerances to give a certain life, after which most of them will be discarded. In other words each component is in itself a "throw-away" unit which has been accepted by the constructor as part and parcel of his technique.

The printed circuit method has been regarded as something that ill fits this technique, and yet something that cannot be entirely ignored. It is not surprising, therefore, that there is considerable opposition among constructors to printed circuits, and to introduce what appears to be just another "throw-away" unit to replace the wiring which so far has not given great trouble, and is comparatively inexpensive. The tendency in this country has been to regard printed circuits as something that is useful in miniaturisation and yet a retrograde step for large scale construction, especially in view of the fact that neither the soldering iron nor the screwdriver find much use in connexion with this technique. There is also a natural reluctance to discard long-tried components available on a large scale, and at reasonable prices, in favour of new ones. This impression which prevails is entirely erroneous, and if allowed to persist will hold up development of a new and promising production technique for years. It is only natural that in order to test the value of the technique it should be first adapted to existing methods of circuitry, and that the constructor should try to find a place for printed circuits in his present assembly. While this is undoubtedly a natural point of view it must not be forgotten that the printed circuit is a revolutionary technique, and when

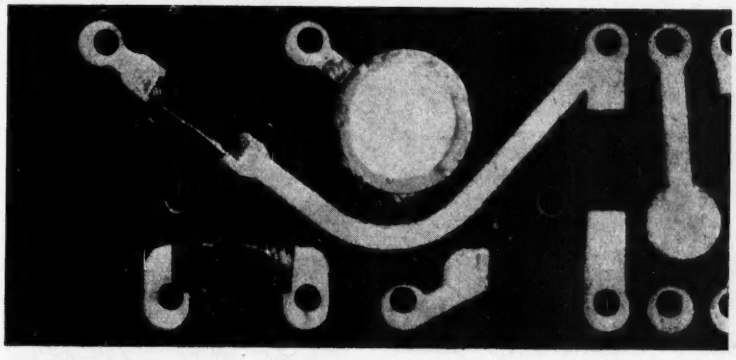

Fig. 1 (above). Sub-assembly showing wiring with one capacitor and two resistances in place

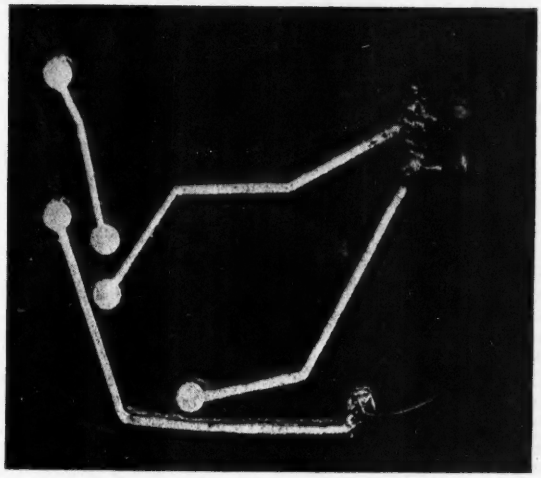

Fig. 2. Printed circuit showing miniature resistor and wire soldered directly into the circuit

* Ward, Blenkinsop and Co., Ltd.

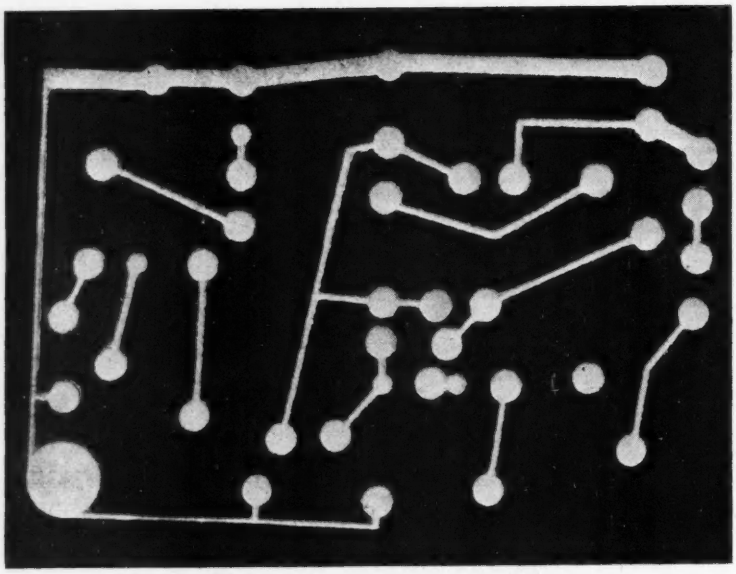

Fig. 3. Circuit printed on bakelite showing line terminals and space for capacitor

fully introduced and fully developed, aims at increasing production and putting the assembly line on an entirely different basis; thus it is likely that the soldering iron may eventually be replaced by chemical solutions, and the screwdriver by plastic presses. This aspect may sound frightening at first, yet, as will be shown, difficulties introduced are not great and the technique may offer considerable advantages from the point of view of increased production at lower cost. It would be premature to say that the technique has been developed in the laboratory to its fullest possibilities, and that all problems in connexion with printed circuit technique have been solved. Problems arising in the construction of various receivers are not identical and will have to be tackled individually, yet the technique has now reached a state where it must enter the industry and the assembly line. Development has reached a stage where the advantages are apparent and can be translated into money-saving and improved performance.

Wiring

The first step in the application of the technique is the wiring, and unlike the orthodox method of assembly, the printed wiring is to be regarded as part of the chassis.

In the "Elargol" technique to which the author has confined himself, this wiring is printed in metallic silver by an offset press. The chassis may be in any plastic material including low temperature thermo-plastic materials, and high temperature ones such as polytetrafluoroethylene, and all types of thermo-setting materials, principally the electrical bakelites. The chassis may or may not be preformed or pre-drilled and may be flexible or rigid. It may consist of 0005" polystyrene film or of silicone plates of $\frac{1}{2}$ in. thickness.

The circuit is laid out in much the same manner as a wiring diagram in which only the wires themselves are drawn to scale. This is then printed by the photo-offset method described in a previous article.* The width and thickness of silver deposit can be specified to close limits and naturally governs the performance.

If the printed line is overloaded this will lead to heating which may be detrimental to the plastic, and before laying out the circuit it is necessary to know what currents have to be carried, in order to specify the width and thickness of the deposit. Normal deposits are one thousandth of an inch thick and a line of 1/16th of an inch in width can carry 1 amp. safely for an indefinite period, while a line of double that width can carry 2.5 amp. indefinitely without appreciable heat. There is, however, no limit to the width or thickness of line that can be printed. In laying out the circuit it is important that the designer should divorce himself as much as possible from the ideas of orthodox construction. It is often possible to place components in much closer proximity, and to include in the wiring items not normally included; thus, for instance, a loop aerial may be placed as a frame around the circuitry.

Crossing of wires is effected by drilling through the chassis, when it is easy to silver the inside of the drilled hole for conducting purposes. Rivets or screws may be placed through the circuit, but although this method of contact may seem attractive to the designer used to orthodox wiring, much of the value gained by printed circuits is lost by the introduction of unnecessary components of this nature. The print may be soldered directly, giving joints of serviceable strength. (50 lb. pull on an average joint can easily be obtained). There may, of course, be joints where greater mechanical strength is required, and here rivets have to be used. When selecting a suitable solder it must be at least as flexible as the plastic. Bismuth-tin solders which are attractive for their low melting point and small affinity for silver are unsuitable because they are too brittle. Best results are obtained with a resin-cored lead solder previously saturated with silver, and ordinary silver solders using non-corrosive fluxes, all of which are commercially available. With these materials even unskilled operators can make soldered joints quickly and efficiently. While the present state of the art does not permit the complete elimination of soldered joints, the designer should reduce these to a minimum, as they must only be regarded as links of the printed circuit to the parts that can up to date, not be printed, and to outside connexions such as loud speaker leads, etc. Other points that should be remembered are that for the sake of servicing it is an advantage to arrange the chassis so that the tap-off holes or joints lie near the edge of the panel, so that the panel can be regarded as a unit which is connected to the rest of the components by eliminating leads from a minimum number of points. This gives an easier access

* *Electronic Engineering*, June 1947, p. 198.

to the printed panels and allows for quick and efficient repairs.

One of the important points to the electronic engineer is the question of repair. It cannot be too strongly emphasised that any repair to the circuit can easily be done without complete replacement of the printed unit. A colloidal silver solution like "Elargol" W.8 may be applied by brush with subsequent stoving for a short time at a low temperature, say 20 minutes at 85° C. or five minutes at 120° C. Taking for example an extreme case of a bakelite chassis having broken right through, thereby breaking several printed lines on both sides of the chassis. First the plastic is gummed together with a suitable adhesive, preferably a bakelite or any other resinous adhesive. With a suitable brush the gaps in the silver line are bridged with "Elargol" solution and the chassis put into an oven for 10 minutes at 100° C. (a temperature which is quite safe for all bakelites and most other plastics, but due regard must be paid to components of the capacitors). It is then removed and the gaps are bridged on the other side, and the process repeated. If these repairs are to be done on a large scale, both sides can be bridged at the same time, and the plastic stoved in a jig. The repair is a permanent job which will not affect the performance of the circuit. It is also often possible to return the print to the makers to be overprinted without affecting any other components on the chassis. This, however, in most cases would prove too expensive.

Resistors

The usual printed resistance is a film of graphite or carbon suspended in a suitable resin and applied between the two terminals. This is then adjusted to a given value by scraping away some of the material while measuring on a bridge. It is often difficult to adjust this value while the resistance is part of a circuit, and may be connected to other components.

The "Elargol" resistor developed in these laboratories does not use this method, which although acceptable for many purposes, flavours of the "throw-away" unit. The "Elargol" resistor consists of a fine grid system printed in a resistance material on to thin plastic film to definite values. The small plastic lamina has silver terminals printed on it, and is inserted into the circuit by means of an adhesive and under slight heat and pressure to ensure perfect contact of the terminals, also complete adhesion to the plastic chassis. This resistor when inserted is part of the printed circuitry, but is in itself a prefabricated unit, *i.e.*, all measurements are done before it is inserted. These flat laminæ can be made to specifications within 5 per cent, as far as ohmic resistance is concerned for a definite length or width, ranging from 250 ohms to 5 megohms. Their rating can be specified as from $\frac{1}{8}$ watt to 1 watt. For high resistance values it is not recommended to use these resistances at a rating of more than $\frac{1}{4}$ watt. The lamina is placed with the resistor face downwards on the chassis so that the plastic film backing acts as a protective layer. For further protection it may be painted over with a suitable varnish, say a urea formaldehyde non-tracking varnish. This pre-formed printed resistor, apart from great advantage in cost, particularly where testing is concerned, allows quick and easy repairs to be carried out.

To replace an "Elargol" resistor the existing resistor is dissolved out with a suitable solvent such as carbon tetrachloride, trichlorethylene or petrol. This dissolving out process for a faulty resistor is easily carried out with a wad of cotton wool soaked in the solvent, or by painting the solvent over the resistor and allowing it to stand for a minute and then wiping off with a soft cloth. The resistor can then be replaced by another pre-printed unit, by just pressing it in, preferably but not necessarily with a warm iron (80° C.) and then painting over with a non-tracking varnish. It is, however, often an advantage to the designer to insert a standard resistor rather than have a printed one. The best method available at present for this is soldering a miniature resistor directly with the shortest possible leads to the printed wiring. This may arise in cases where no space is available on the chassis but sufficient space above it, or where the resistor is intended to bridge large gaps on the circuit. It may also be advantageous where ratings or values are desired which cannot be conveniently printed.

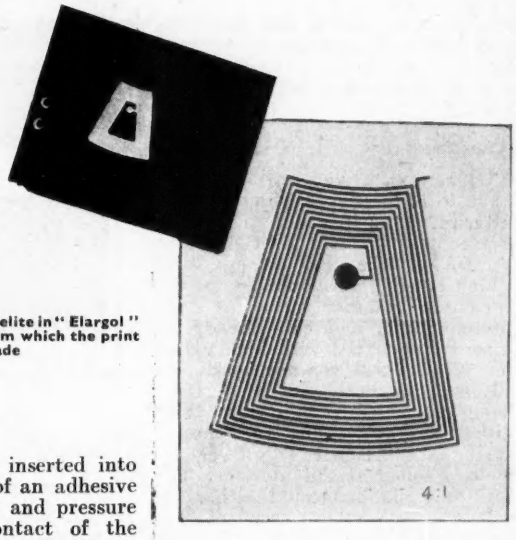

Fig. 4. 1.5 μH coil on bakelite in "Elargol" showing the drawing from which the print was made

Coils

Coils may be printed as part of the wiring either on the chassis or on a cylindrical plastic core, and the remarks made on wiring apply to these coils. Again it will have to be taken in consideration whether more space is available above or below the panel. If space is available above, it is an economical advantage to print it as part of the circuit, as this will in no way increase the cost of the print which is independent of circuit intricacy. The choice of coil, as far as shape and number of turns are concerned, is a question of electronic design. It is sufficient to state that coils can be printed like wires and the lines may be of any desired width down to .005 in., but it must be considered that as the width decreases the thickness of line that can con-

veniently be printed also decreases, and hence the resistance increases, which would have an obvious detrimental effect on Q for a very few lines.

Capacitors

Capacitors, like resistors, will have to be pre-formed and inserted afterwards as part of the print. The most convenient form known at present is the flat ceramic disk which is being developed by various capacitor manfacturers at the present time, and can already be made of materials with high values for K. These ceramic disks are silvered on both sides, the face being connected to the printed wire either with a conductive adhesive such as "Elargol W.8" or by melting solder at the interface. The top may be connected either by soldering a small piece of foil between its silver and the silver of the conductive line, or where possible by painting a bridge down the side of the capactor in the manner described for the mending of wiring. Similarly, a conventional unit may be soldered into the circut. These disks may be of rutile or high permittivity steatites, their faces being ground to give a flat disk. To replace such a unit either the adhesive is dissolved, or the solder melted by local heating. It may then be replaced by a new unit. This capacitor cannot, of course, be described as a printed unit. At present it is the type of unit that fits the printed circuit technique most closely and is known to give satisfactory performance for most purposes. On the same lines a piled mica capacitor may be inserted, the principal difficulty in either case being that this type of capacitor has not the same flexibility as the plastic chassis and being of a brittle nature, may be more likely to break.

For low value capacitors it is often advantageous to use the chassis itself as a dielectric, in which case the plastic chosen will have to be of a suitable permittivity, and a pre-determined area of silver is printed on either side of the chassis, and suitably connected within the printed wiring. This is the only type which can be truly described as a printed capacitor and sufficient precision may be obtained in this way for smaller values. This type, when faulty, is repaired in the same way as the wiring, as indeed it is part of the wiring, and may be adjusted by scratching out the silver with a suitable tool. This type has so far not been widely used.

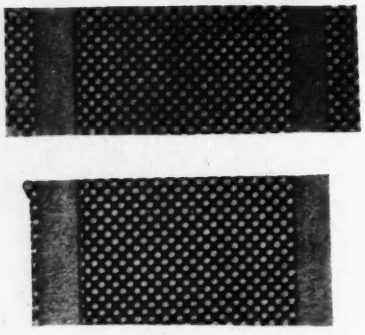

Fig. 5. 10,000 and 100,000 ohm resistances, showing resistor grid and silver terminals

Other Components

Sub-miniature valves may be soldered directly into the circuit, or suitable holders may be soldered in. The same applies to miniature valves where the pins may be bent over and envelope strapped horizontally to the chassis. The conventional valve holder, however, will have to be mounted in the orthodox fashion and connected in this way. There is no reason why a suitable new valve holder should not be designed to be part of the printed circuit. It is sometimes beneficial to the designer to separate printable units, *i.e.*, that can form parts of the printed circuit from the unprintable ones, such as valves, variable capacitors, etc., and to mount these in the orthodox fashion and to connect to them the printable components on a separate chassis. Thus the printed circuit may be regarded as a composite unit of the orthodox complete circuit. A complete assembly can be envisaged to contain several such composite units mounted in various fashions.

General

It is often convenient to coat the whole printed assembly or subassembly by dipping in a solution of rubber or non-tracking varnish for tropicalisation. This step is neither costly or complicated, but care should be taken that the varnish is of such a nature that it does not attack the plastic chassis or any of the components.

It is felt that this new technique opens new fields for the designer and the electronic engineer, leading to increased production at lower costs.

New Electrical Engineering Building at Illinois

THE new $2,000,000 electrical engineering building of the University of Illinois at Urbana, Illinois, will be formally dedicated at ceremonies extending from May 19 to May 21. The planning of this building was under the direction of Dr. W. L. Everitt, head of the electrical engineering department and recently appointed as Dean of the College of Engineering.

An important feature of the dedication ceremonies will be a symposium whose main theme is "Expanding Frontiers in Electrical Engineering."

In addition to the technical symposium, a general sessions programme will be devoted to the "Development of an Electrical Engineer" both in college and in industry.

The new building is of modified Georgian design. It has ample classrooms and laboratories for experimental work in communications, illumination, measurements, servomechanisms, and electrical machines. The machines laboratory, for example, covers an area of 12,400 sq. ft. and is equipped with fluorescent lighting, sound proofing, and forced-air ventilation. Electric transfer cables are provided to class and conference rooms throughout the building to facilitate lecture demonstrations.

The former electrical engineering building has been renamed the Electrical Engineering Research Laboratory and has been reconditioned to make room for a rapidly expanding research programme. At present it houses an electron tube research laboratory which is completely equipped for the design and development of experimental tubes. Space has also been provided for the accommodation of an electronic computer which is to be constructed in the near future.

Guided tours will be conducted through both the electrical engineering building and the electrical engineering research laboratory to allow visitors to inspect the available facilities. Most of the laboratories will be in operation—with students conducting typical experiments and performing electrical demonstrations.

Leakage Inductance

By N. H. CROWHURST

THE principle of leakage inductance or reactance will be quite familiar to transformer designers, but due to a possible ambiguity as to definition we here define the quantity as it will be determined from the data sheet on page 133. Due to current in each of two windings there will be a quantity of magnetic flux which will link with the winding causing it, but not with the other winding, and due to each of these groups of flux there will be an E.M.F. induced when the current and flux change. The total leakage flux could be regarded as due to combined effect of the current in both windings, and the E.M.F. induced in each winding treated separately, or the flux due to the current in each winding could be treated separately and the E.M.F.'s in each winding derived and integrated. For the purpose of the calculations made from this data sheet, the leakage inductance from one winding to another can be defined as the inductive component of the impedance of one winding, the other winding being short-circuited.

Derivation of Formula

If we consider an element of one of the windings of a simple double wound transformer in cross section, the element being taken parallel to the division between the two windings so that the leakage flux throughout the length of the element is constant, then the leakage flux density, B (Fig. 1) will be proportional to the distance from the outside of the winding, the maximum occuring in the space between the windings, where the leakage ampere-turns are maximum. The E.M.F. induced in the whole winding due to the element of flux will be proportional to the number of turns which the flux couples, and the value of the flux. Thus, if x measures the distance from the outside of the winding, the E.M.F. induced in the winding due to the flux passing through the element will be proportional to x^2dx. The total E.M.F. throughout the winding will be proportional to $\int_0^{a_1} x^2 dx$, or $a_1^3/3$.

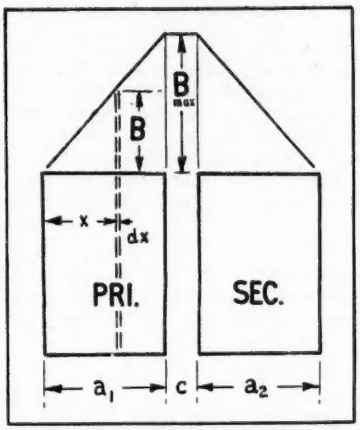

Fig. 1. Derivation of leakage inductance formula

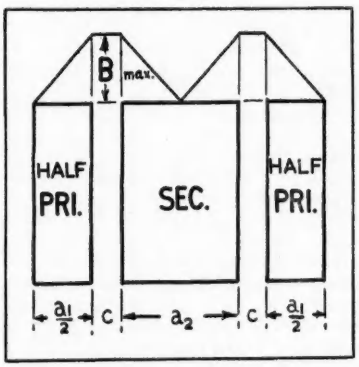

Fig. 2. Effect of elementary mixing

Thus, the leakage inductance due to the winding space will be proportional to one-third of the thickness as compared with the leakage inductance due to the maximum flux in the space between the windings. If a_1 and a_2 are the thicknesses of the windings, and c is the space between the windings, the leakage inductance will be proportional to

$$\frac{a_1 + a_2}{3} + c.$$

If one of the windings is divided in two, each half being disposed on opposite sides of the other winding, then the maximum leakage flux ampere-turns at the spaces between the windings, responsible for producing B_{max}, will be half that of the simple winding case, *see* Fig. 2. The leakage inductance due to each half winding will, according to the integration above, be one-eighth of the previous value for that winding. The leakage inductance for the whole winding will be reduced to one-quarter, or by a factor of four, ignoring the space between the windings. To simplify the conception as windings are further subdivided, it will be noted that there are two points of maximum flux in this second case, so we coin the term " leakage flux area " to express the integration for each pair of winding

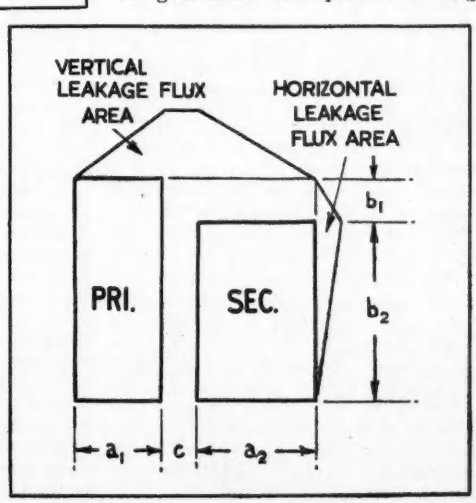

Fig. 3. Components of leakage flux in two directions

sections. This leakage flux area is represented graphically by each rhomboid at the top of Figs. 1 and 2. The leakage flux in each space between windings has half its original value, but there are now two such spaces, so the total component of leakage inductance due to the spaces will be the same, if each space is equal to the single space in the original case.

Thus the leakage inductance can be written as proportional to $a/3N^2 + c$, where a is the total thickness of all winding sections, N represents the number of leakage flux areas, and c is the thickness of each insulation section.

Considering the leakage flux now on the basis of the reluctance of its magnetic circuit: the reluctance of the whole of the circuit outside of the windings may be ignored; the reluctance within the windings will be proportional to the length of the flux paths, or dimension "b" of the winding (*see* Fig. 8) and inversely proportional to the area of flux. The area of flux will be proportional to dimension "a" of the windings, as already considered, and also to the length of the mean turn of the windings, which we will denote by d. Thus, the whole expression for leakage inductance, if T is the number of turns in the winding at which it is measured, can be written:

$$L \propto \frac{d}{b}\left(\frac{a}{3N^2} + c\right)T^2 \quad \ldots\ldots\ldots (1)$$

Windings without Common Dimension in one direction

In the foregoing consideration the assumption has been made that both windings are of equal dimension in direction "b". Where this is not true, the simplest method of predicting leakage inductance will be to resolve the leakage flux into two components at right angles. In the simple case where the windings have equal dimensions in the one direction there is zero component of leakage flux at right angles to the main direction.

As the E.M.F. produced by a rate of change of current in a winding is proportional to the square of the component of flux being considered (as shown by the term N^2 in Equation 1) the total E.M.F. due to two fluxes at right angles will be equal to the sum of the E.M.F'S due to the component fluxes. Therefore the total leakage inductance will be equal to the sum of the values given due to each component of flux. Where the windings are not of equal length, or having non-coincident ends, the leakage flux in the second direction will be proportional to the unbalance of ampere turns. Fig. 3 illustrates this for a simple case The leakage inductance due to the flux in a vertical direction will be calculated directly from the formula given above, while the leakage inductance due to the flux in a horizontal direction can be calculated from the same formula using a modified value of turns, T_s, given by $T_s = T\left(\frac{b_1}{b_1 + b_2}\right)$. For this component of flux, the positions of b and a will be reversed and there will be no c (Fig. 8).

Various degrees of mixing

By increasing the number of equivalent leakage flux areas, N, the leakage inductance can be reduced for a given number of turns and winding cross section, until the limit is reached where $a/3N^2$ is less than c, when c becomes the limiting factor. Thus, where a high degree of mixing is used, the thickness of insulation between windings becomes important, and it may be necessary to use the absolute minimum permissible. The table of winding arrangements shows values of N^2 for various ways of dividing up primary and secondary. It will be noticed that the best arrangement, *i.e.*, that giving the highest value of N^2 for a given number of sections, is always that having a half area section at each end of the arrangement. This is sometimes two half area primary sections and sometimes one half area primary section and one half area secondary section.

In the same table the winding sections are shown connected in series for convenience. This is not essential, and parallel or series parallel connexions can equally well be used. Where series connexion is used a half area section should have half the number of turns in each unit area section, and the whole number of turns in the winding will, of course, be the sum of the turns in the individual sections. Where parallel connexion is used, the turns in all parallel groups of winding must be equal, and if a half area section is parallel with full sections, then the wire gauge of the half section should be such that the winding occupies half the area and has twice the resistance.

Use of the information given here will show that for a push-pull transformer design the best coupling will be obtained by increasing the number of layer sections in the winding rather than by using a complicated cross connected winding using a divided bobbin. It is quite possible to produce an arrangement which will give identical resistance and leakage inductance for each half of a centre tapped push-pull winding, for example, the seventh arrangement in the left-hand column in the table, using the centre primary section for one half and the two outside half area sections for the other half. These will each have identical D.C. resistance and identical leakage inductance to the whole of the secondary, whether the secondary be series or parallel connected. The only possibility of lack of balance with this arrangement occurs in the winding capacity and inter-winding capacity, which will be considered in a later data sheet.

In general, the best shaped winding cross section from the viewpoint of achieving a low leakage inductance will be one having a long layer length corresponding to dimension, b, and a small winding depth (dimension a). The standard "*wastefree*" type laminations give a winding area which is practically ideal from the viewpoint of combining a high primary, or shunt, inductance with a low leakage inductance. The thicker stacks of laminations give increased ratio of primary inductance to leakage inductance, because the primary inductance is proportional to the cross sectional area of the iron circuit, while the leakage inductance is proportional to the length mean turn, and increasing the stack of laminations increases the cross sectional area by a greater ratio than it does the length mean turn. The limit in this direction will usually be a practical one imposed by the difficulty of producing a winding with long, flat sides.

Putting leakage inductance to use

The author has produced several is put to practical use by making it an inductive element in a filter. Use of leakage inductance for this purpose has the great advan-

tage that the associated capacitive elements can be transformed by the turns ratio of the winding, so that conveniently small values of capacitance may be used where the theoretical circuit values may be many times larger. A typical bobbin used to produce two of the inductance elements in a low pass *m*-derived filter is shown at Fig. 4. The winding located in the slot lettered a_3 will have a slightly higher leakage inductance to that in a_2 than will the one located in slot a_1, due to the fact that b_2 is greater than b_1. It should be realised that the leakage inductance can only be varied by adjusting the number of turns in the input winding or by rearranging the spacing and dimensions, although the inductance referred to any winding can be adjusted by variation of the turns of that individual winding. The input and output of the filter may be designed for 600 ohms or any other convenient impedance and the turns of the various windings adjusted so that all the capacitors used may be of a standard value, say, 0.01 μF. Fig. 5 shows another arrangement used for producing two absorption dips in a response curve by simply shunting windings 3 and 4 by a standard value capacitor. The actual size of a complete transformer with its associated condensers can be made very much smaller than such an absorption filter designed to operate at the line impedance of the network.

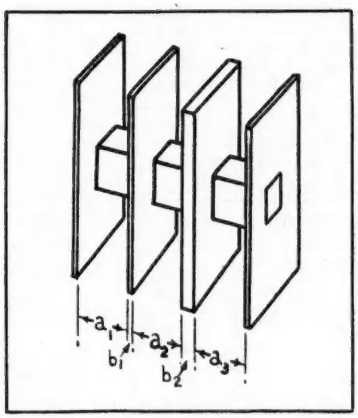

Fig. 4. Bobbin for m-derived low pass filter using leakage inductance.

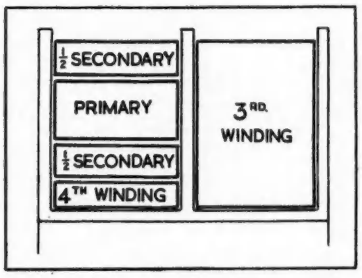

Fig. 5. Bobbin for microphone matching transformer incorporating two absorption circuits

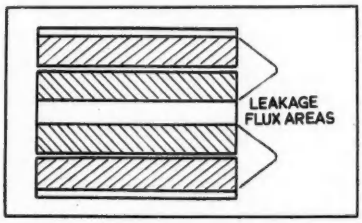

Fig. 6. Mixing arrangements for multi-ratio transformers

Multi-Ratio Transformers

In designing a transformer where parts of the winding will not always be used, the winding layout should be so arranged that portions of winding not in use at any time occupy a space where leakage flux is not induced by the active windings, or is at a minimum, in order to obtain a minimum leakage inductance. With the simple type of winding having only one section each for the primary and secondary, the inactive portion of winding can be arranged so that it is on the side of its own winding remote from the other winding. If sectioning is used, more careful consideration is necessary, but it will always be possible to arrange the winding so that the inactive portion is in a space between leakage flux areas. Fig. 6 shows how this can be achieved in the simplest form of mixing, having a primary in two sections and the secondary in one section. If a portion of the secondary is to be inactive, it should be at the centre of the winding, both electrically and physically, which means that tappings will have to be made at the ends of the active portions, and the inactive portion must be left open circuit. If part of the primary is inactive, then it should be the part remote from the secondary winding. In Fig. 6 the shaded areas of winding represent active portions, while the unshaded areas are inactive.

Auto Transformers

In calculating the leakage inductance for an auto transformer, the series and shunt sections of the winding can be treated in the same way as separate windings. The leakage inductance referred to the input or output terminals can then be calculated in the same way as winding resistance loss is calculated for an auto transformer.

Use of Chart

An appropriate value of N^2 for the winding arrangement being used can be found on the left of the Table overleaf. Referring to the chart on page 132, this value of N^2 is intercepted with the dimension "*a*" of the winding cross-section at *A* (*see* Fig. 7). This is then referred vertically to the small space in the chart. Here add dimension "*c*", the space between sections of winding. Where multisectioning is used this will be the spacing between each primary and secondary section. Refer this sum value vertically to intercept with the length mean turn at B and follow the diagonal scale to intercept with the dimension "*b*" of the coil at *C*. From here refer again vertically to intercept with the turns scale at *D*. The value of leakage inductance is then read off at *E*. If the number of turns in the winding, the value of dimension "*b*", or length mean turn, is not accommodated within the range shown, the appropriate value on the chart should be multiplied by a power of ten to bring it to the actual value, and the value of leakage inductance obtained from the chart multiplied by the power of ten obtained from the table below.

Example I: Winding space on bobbin, $\frac{5}{8}$ in. long by 3/16 in. deep; mean turn length, $2\frac{1}{2}$ in. Primary turns, 600; secondary turns, 8,000; simple single-section windings in layer arrangement; insulation between windings, 0.020 in.

From this information dimension "*a*" can be taken as about 0.15 in., allowing for insulation and clearance. The intercept of the 0.15 in. (interpolating between 0.14 in. and 0.16 in.) on the "*a*" scale with $N^2 = 1$ gives 0.05 in. on the vertical scale. Add to this the 0.020 in. for

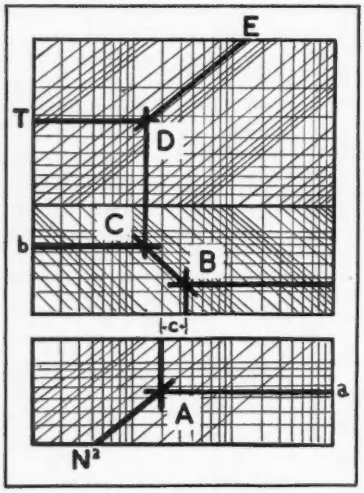

Fig. 7. Showing use of chart

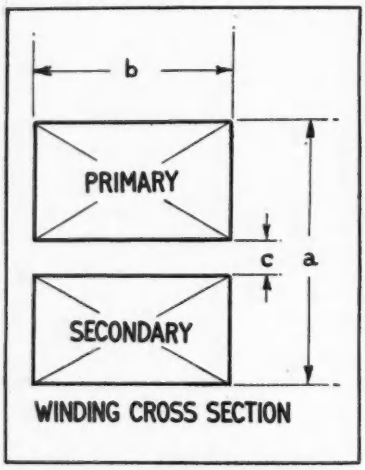

Fig. 8 Dimensions used in chart

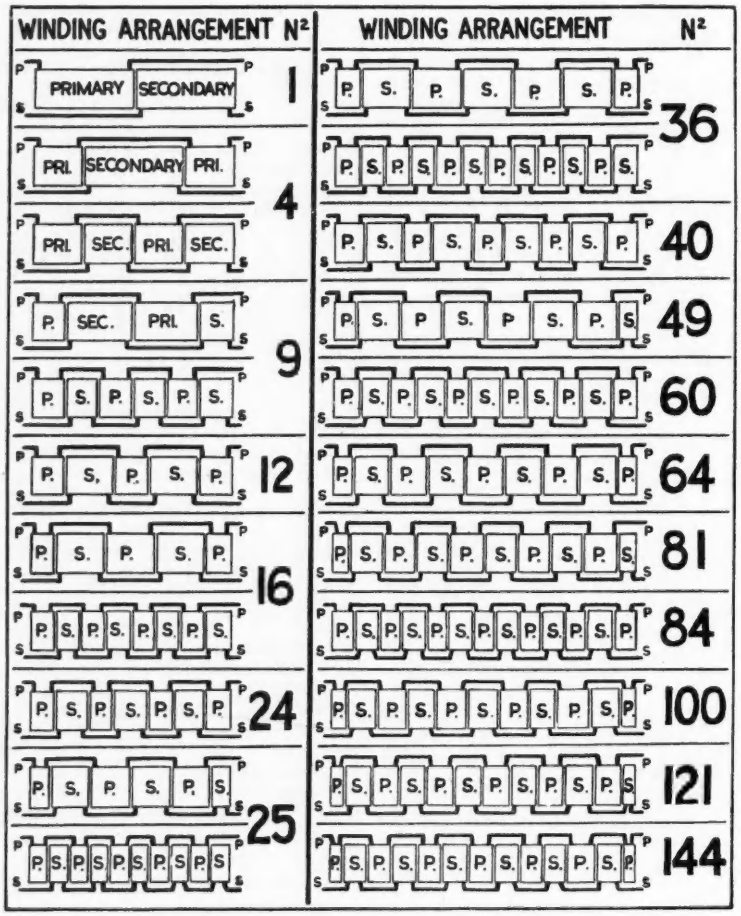
WINDING ARRANGEMENT N²
WINDING ARRANGEMENT N²
PRIMARY SECONDARY 1
PRI. SECONDARY PRI. 4
PRI. SEC. PRI. SEC.
P. SEC. PRI. S. 9
P. S. P. S. P. S.
P. S. P. S. P. 12
P. S. P. S. P. 16
P. S. P. S. P. S. P. S.
P. S. P. S. P. S. P. 24
P. S. P. S. P. S. 25
P. S. P. S. P. S. P. S. P. S.
P. S. P. S. P. S. P. S. P. 36
P. S. P. S. P. S. P. S. P. S. P. S. P. S.
P. S. P. S. P. S. P. S. P. 40
P. S. P S. P S. P. S. 49
P. S. P. S. P. S. P. S. P. S. P. 60
P. S. P. S. P. S. P. S. P. S. P. S. P. 64
P. S. P. S. P. S. P. S. P. S. P. S. 81
P. S. P. S. P. S. P. S. P. S. P. S. P. 84
P. S. P. S. P. S. P. S. P. S. P. S. P. 100
P. S. P. S. P. S. P. S. P. S. P. S. 121
P. S. P. S. P. S. P. S. P. S. P. S. P. S. P. 144

Table of Winding arrangements

insulation, we have 0.07 in. Following the diagonal from the intercept with 2.5 in. length mean turn to the intercept with the 0.625 in. dimension "*b*", gives about 0.028 on the vertical scale. Following this vertically to intercept with 600 turns, gives leakage inductance referred to the primary as about 1.75 mH. Taking the intercept with 800 turns gives about 2.9 mH. Therefore leakage inductance referred to the secondary of 8,000 turns will be about 290 mH., or 0.29 H.

Example II: Using the same bobbin as above, but with a partition vertically, 0.025 in. thick, the primary and secondary are to be wound either side of the partition.

Dimension "*a*" will now be 0.6 in., "*b*" approximately 0.17 in. (allowing 0.0175 in. clearance at the top), and "*c*" 0.025 in. Intercept with "*a*" = 0.6 in. and $N^2 = 1$ gives a vertical of 0.2 in. Adding "*c*" this becomes 0.225 in. Intercept with length mean turn of 2.5 in. and "*b*" of 0.17 in. (in opposite direction along the diagonal line this time) brings us to the vertical reference at about 0.35. Following this up to intercept with 600 turns gives leakage inductance referred to the primary of about 20 mH. The 800 intercept gives 36 mH, so the leakage inductance referred to the secondary will be about 3.6 H.

Example III: A push pull output transformer is to be wound on a bobbin of length $1\frac{1}{2}$ in. and depth, allowing for top clearance, of $\frac{3}{8}$ in. The length mean turn is 6 in. Primary turns 4,000; secondary turns 75. First consider completely layer mixing arrangement using the 7th arrangement in the left hand column. Insulation between sections can be as low as 0.015 in. Required leakage inductance between each primary and secondary and between whole primary and secondary. Each primary half-winding to occupy 30 per cent of the available space, and the secondary 40 per cent.

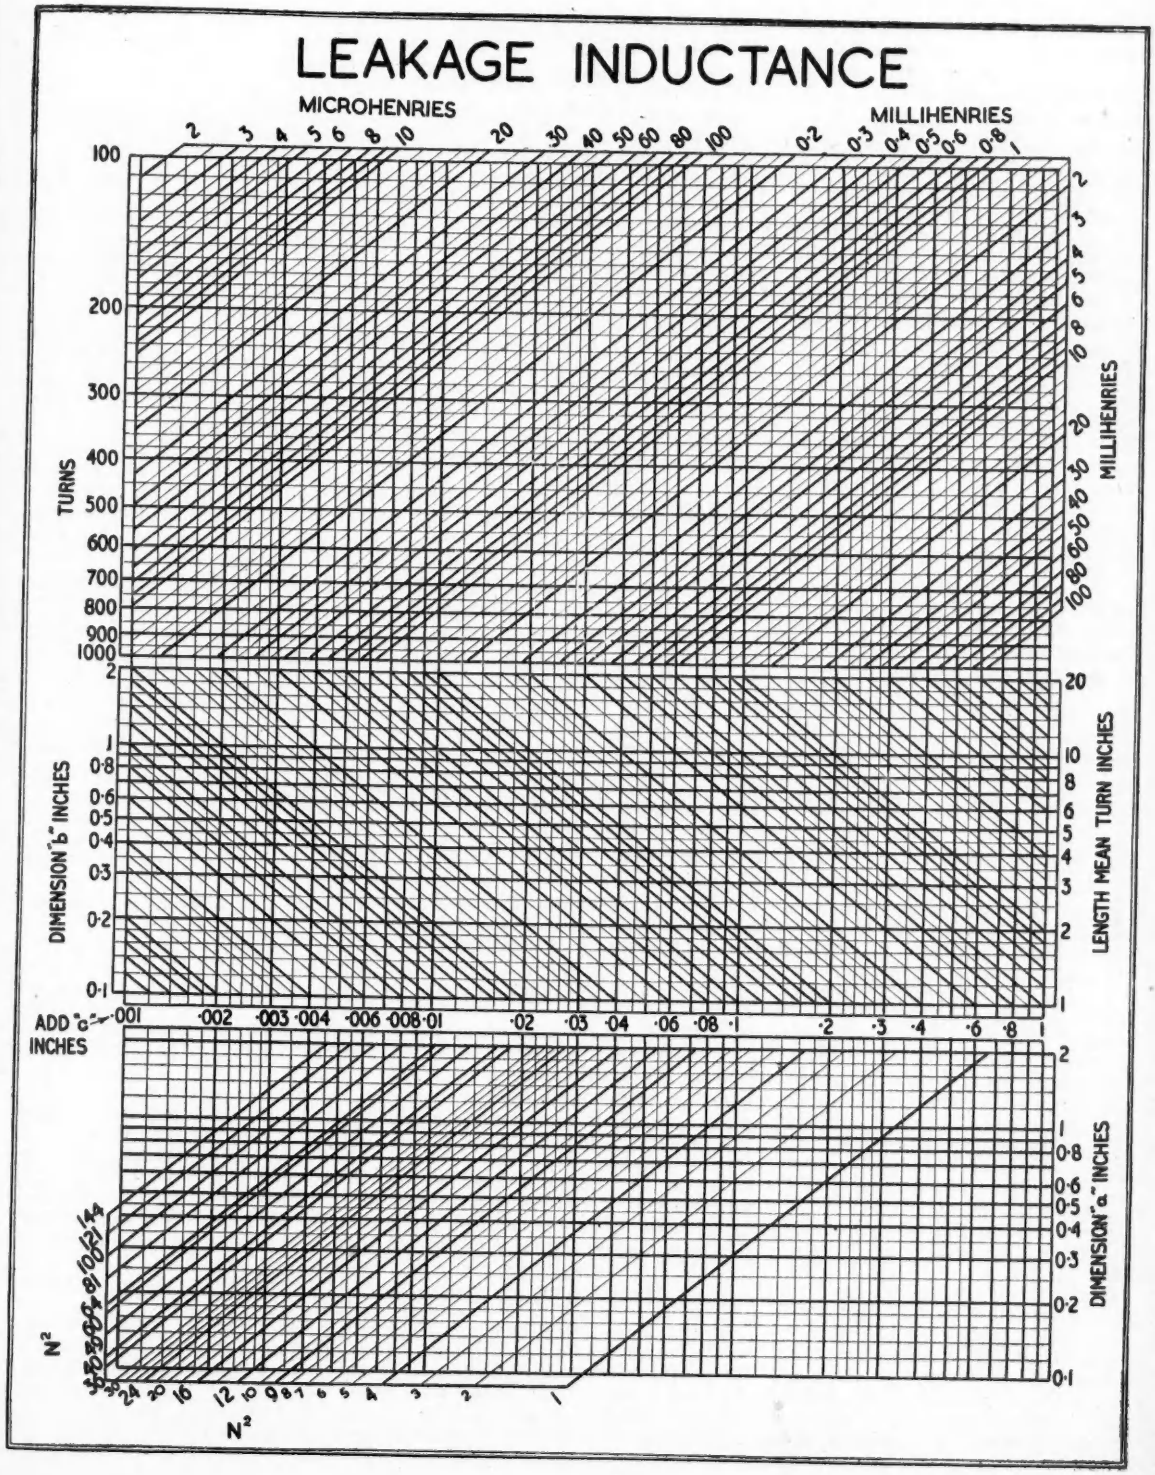
LEAKAGE INDUCTANCE
MICROHENRIES
MILLIHENRIES
TURNS
MILLIHENRIES
DIMENSION "b" INCHES
LENGTH MEAN TURN INCHES
ADD "c" INCHES
DIMENSION "a" INCHES
N²
N²

Four thicknesses of 0.015 in. take 0.060 in., leaving just over 0.3 in. actual winding depth. Each primary should occupy a total of 0.09 in. and the secondary 0.12 in.

Leakage inductance between each primary and secondary: "a" = 0.21 in., $N^2 = 4$. This intercept gives vertical of about 0.017 in. Adding 0.015 in. for "c" gives 0.032 in., which intercepted with length mean turn 6 in. and "b" of 1.5 in. brings us to about .013. For 2,000 turns, read off for 200 and multiply by 100. This gives leakage inductance from each primary to secondary of about 8.5 mH.

Between whole primary and secondary: "a" = 0.3 in., $N^2 = 16$. This intercept gives vertical, 0.0063 in. Adding "c", 0.0213. (There would be considerable advantage here if winding insulation thickness could be reduced.) Intercepts with length mean turn and "b" of 6 in. and 1.5 in. respectively give vertical of about .0085, and intercept with 400 turns gives inductance of 0.22 mH, or 22 mH for 4,000 turns.

Example IV: For the same transformer as the previous example, the bobbin is divided in the centre by a partition 0.1 in. thick, and each side is wound with two primary sections and one secondary section. Required, leakage inductance between each primary and secondary and between whole primary and secondary, when the primary sections making up each half are (a) both in the same side of the bobbin, and (b) when they are cross-connected.

Between each primary and whole secondary: (a) both primary sections same side: first due to axial flux, "a" = 0.3 in., $N^2 = 4$; "b" for primary 0.7 in., for secondary 1.4 in. As primary occupies 60 per cent of depth and secondary 40 per cent, mean can be taken as 1.12 in. Thus inductance due to axial flux is given at 13.5 mH. Due to radial flux, ampere turns are 50 per cent of total, thus this portion can be referred to 1,000 turns; "a" = 1.4 in., "b" = 0.25 in. (computed as above for axial flux), $N^2 = 1$, "c" = 0.1 in. Thus inductance due to radial flux in given as about 180 mH. Total leakage inductance from each primary to whole secondary is thus nearly 200 mH. (Given above as 193.5 mH.)

Between each primary and whole secondary (b) cross-connected arrangement: this can practically be regarded as two leakage flux areas only, both having only axial flux, each having a physical area of cross-section "a" = 0.21 in. and "b" = 0.7 in. Treating the two together as a composite winding such that "a" = 0.42 in., $N^2 = 4$, "b" = 0.7 in., the inductance is now found to be about 28 mH, about one-seventh of the value given by the other method of connexion.

Between whole and primary and secondary:—This value is not affected by the method of connexion, since the whole area is used in each case; "a" = 0.3 in., $N^2 = 4$, "b" = 1.4 in., c = 0.015 in. (as before). Inductance thus given is 44 mH referred to 4,000 turns.

In examples III and IV any of the values of leakage inductance can be referred to the secondary by taking the appropriate intercept with 750 turns and dividing by 100 to obtain the inductance referred to 75 turns.

The Use of the Decca Navigator System for Under-Water Oil Exploration

THE world's consumption of mineral oil has been rapidly rising over the past 10 years, and the existing land resources are inadequate to meet this growing demand. Oil experts have, for a number of years, been studying the possibility of recovering oil from the ocean bed. It is known that the sea areas of the Caribbean Sea and the Persian Gulf are probably rich in oil resources, and where the water is not unduly deep, present-day techniques permit drilling to be carried out.

An essential feature of oil recovery is the preliminary exploration and survey. When this work is carried out on land, normal survey techniques can be employed, but when the same problem is to be tackled at sea, the surveyor finds himself faced with entirely new problems. The work must often be done out of sight of land and it is quite unsatisfactory to rely on astronomical observations. Fortunately, recent developments in radio position fixing provide an entirely new method. The Decca Navigator System, developed primarily as a radio aid to marine navigation, has been found by many survey authorities, including the Hydrographer of the Royal Navy, to possess an accuracy unequalled by any other radio device. It can provide, over thousands of square miles of sea, a fix of position with an accuracy adequate for purposes of hydrographic survey and oil exploration.

A chain of Decca navigator stations, consisting of a master and two slave stations, lays down a pattern of radio position lines which, interpreted by a radio receiver carried in the survey launch, enables the surveyor to plot his position with very great accuracy. Thus, over a featureless area of sea, is provided a grid which marks the position of any point as simply and as accurately as though it were on land.

The Decca Navigator Company, appreciating the value of the System in this new field, have developed a transportable Decca transmitting station which can be rapidly erected in any part of the world.

The decision of the Bahrein Petroleum Company to employ the Decca System in their oil exploration work was taken after a careful study of all existing electronic aids, including several American systems, and it may therefore be assumed that British progress in this field is in advance of American.

The application of Decca to underwater oil exploration is arousing very considerable interest among oil surveyors throughout the world, and it may be expected that a number of other systems will shortly be employed for similar work in various parts of the world.

Ferro-Resonance

By BERNARD DRAKE, B.Sc., A.M.I.E.E.*

An investigation of the oscillations at sub-harmonic frequencies by semi-graphical analysis

WHILE many networks in the field of electronics contain non-linear elements that do not obey the strict current *versus* voltage proportionality of Ohm's Law, those containing resonating, saturating iron-cored inductances[1] have remained the most inscrutable. Although the development of these circuits has inevitably proceeded empirically, a rational theory that lifts them out of the realm of the mysterious should lead to wider applications, if not to better performance. However, the fact that previous attempts to explain the functioning of such circuits have presented almost insuperable difficulties suggests that it is incorrect to approach the problem by purely mathematical means, and that what is required is a combination of theory and practice—in this case simple mathematics wedded to an exact graphical representation of measurements. In what follows, two concrete examples—first the simplest case of ferro-resonance, next an actual frequency converter of more complex design — are attacked, and in both of them the semi-graphical analysis leads to a logical, satisfying explanation.

Ferro-resonance

Ferro-resonance, which occurs under certain conditions in a resonant circuit containing one or more saturating iron-cored inductors, can be defined as a state of heavy, non-sinusoidal oscillation that may even have a repetition frequency below that of its sinusoidal exciting source. Now, while an iron core has a permeable state, which is used in normal transformers and chokes, where some only of the magnetic "domains" have turned round into the direction of the field, in the current waveform during ferro-resonance there are always characteristic heavy pulses that alternately drive the core beyond the normal state into the abnormal saturated states where the domains are all aligned either in one direction or the other. Between these various states are non-linear transitions which are represented by the "knees" of the magnetisation curves (MM in Fig. 2(a)), and are the cause of the peculiarities of ferro-resonance.

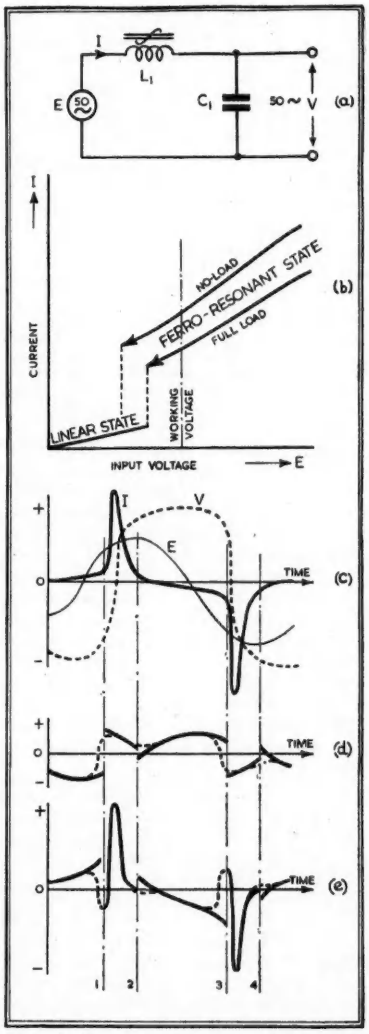

Fig. 1. Ferro-resonance at fundamental frequency (self-starting oscillations):—(a) Circuit diagram; (b) R.M.S. current/voltage characteristics showing transitions to linear state at low voltages; (c) Waveforms of input voltage E, output voltage V and current I; (d) Forced component of current I; (e) Semi-free component of current I.

The necessity for maintenance of the heavy current pulses makes ferro-resonance differ markedly from ordinary resonance. For instance, while the input voltage of a given circuit must exceed a certain minimum, ferro-resonance can, as there is no definite inductance value, subsist over a range of driving frequencies. There is thus for each case a voltage/frequency zone—graphically an area—in which ferro-resonance can occur.[2]

Ferro-resonance at Fundamental Frequency

Ferro-resonance is most simply illustrated, as shown at (a) in Fig. 1, by a series circuit which, while driven from a supply E of low impedance such as the 50 c/s. mains, has merely a capacitor C_1, in addition to the inductor L_1, the core symbol of which has a long S drawn across it to indicate that it is being driven into saturation. The curves at (b) in Fig. 1 of the R.M.S. value of the current I plotted against the input voltage E demonstrate how the ferro-resonant state of oscillation exists only with higher voltages. As the input is reduced (see arrows on curves) a critical value, depending on the intensity of the load connected across the condenser, is finally reached when ferro-resonance can no longer be maintained, and oscillation then continues at a very low level in a linear mode. The critical voltages corresponding to no-load and rated full-load are illustrated by the vertical, dashed portions of the curves. The working voltage, however (chain dotted line), has been chosen at a higher value in order to prevent the stopping of ferro-resonance except on excessive overload. The waveforms at (c) in Fig. 1 show, besides the input voltage E with its sinusoidal form, also the output voltage V with a squarish shape and the current I with alternate pulses, the peak values of which drop on reduction of input or on application of load. Although the heavy pulses

*. Telephone Manufacturing Co., Ltd.

of the saturating inductor occur also in a parallel-circuit driven from a constant current supply such as a pentode valve, the input current, which in this case is sinusoidal, is very much lower in amplitude. Apart from this difference, however, the functioning and analysis of a parallel circuit is very similar to the series circuit described here.

Our new approach to the explanation of the series circuit begins with the reduction of the results of measurement to graphical form. The first step is to prepare on graph paper a B/H loop ((a) in Fig. 2) exactly tracing under working conditions the magnetisation of the inductor L_1. For this purpose a cathode-ray oscillograph of the loop may readily be obtained by feeding the horizontal plates from a small series resistor and the vertical plates from an integrating capacitor of about 2 μF paralleled to the inductor through a 1 megohm resistor. Although the general shape of the loop is then given by the oscillograph, the scale to which it must be drawn is obtained from a normal D.C. magnetisation curve which will also give a more accurate rendering of the slopes, particularly in the region of saturation where the loop is least affected by speed of cyclic magnetisation.

The loop as drawn will be a curve, but it is then necessary to approximate it by a series of straight lines so that the equations of linear network theory may be applied to it. Although a large number of lines would give most accurate results, saving of labour calls for the minimum number that will represent the main features of the loop. All that is necessary to approximate the loop at (a) of Fig. 2, and incidentally to account for the hysteresis as well, are two pairs* as at (b)—one pair almost horizontal for the positive and negative saturated states, the other pair almost vertical for the permeable states. The approximation is reasonably close except in the neighbourhood of the "knees" where judicious interpolation at a later stage will suffice to bridge these transition sections.

* The semi-graphical work described here was inspired by the purely mathematical analysis (limited to 2-element networks) of Boyajian (see reference 3). For the saturating inductance he substituted two hypothetical linear ones of high and low values imaginarily switched alternately into circuit in such a way that the D.C. magnetization curve of the actual component was replaced by two straight lines.

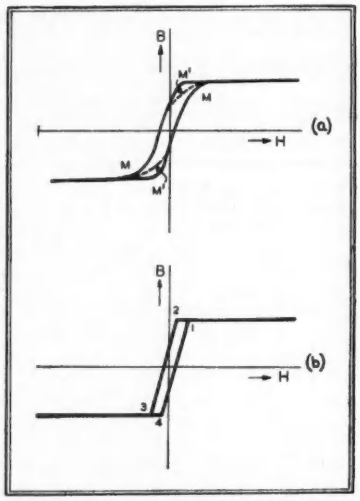

Fig. 2. Actual B/H loop (a) is, for mathematical analysis, approximated at (b) by straight lines representing main features

The instants corresponding to transitions 1,2,3,4 between the straight lines of the approximate B/H loop must now be determined. Since the magnetising force H is proportional to the current, a calibrated oscillograph of the latter is used to draw an accurate waveform *I* Fig. 1(c)) on graph paper on which the transition instants are then marked as indicated by the vertical chain-dotted lines 1,2,3,4 of Fig. 1. Observe that it is only in the comparatively short intervals 1-2 and 3-4 that the inductor is in the abnormal saturated state.

Leaving now the practical for the analytical stage of our investigation we find that before we can proceed we must split the actual currents and voltages into two sets of components which may be termed "forced" and "semi-free." The term "forced component" signifies that at any instant it is the value that the electromotive force would produce in a circuit having a fixed inductance equal to the instantaneous value of the incremental inductance. The "forced" components, which correspond to the familiar steady-state values of linear networks, are by definition of supply frequency. The term "semi-free component," on the other hand, signifies that it is an additional component which, during the time the iron core is passing through a substantially linear part of its B/H loop, is force-free, and oscillates with decaying amplitude at its natural frequency. But it is only semi-free because it receives impulses at the non-linear transitions or "knees" in the B/H loop between permeable and saturated states that, provided input conditions are suitable, continuously maintain it in a repeating cyclic manner. The "semi-free" components, which correspond to those "free" components occurring in linear networks as decaying oscillations superimposed during the transient period following switching or impulsing, are always different in frequency from the supply.

The forced component of current *I* is readily obtained once the slopes of the approximate B/H loop are measured, for these measured incremental permeabilities give corresponding inductance values from which any forced component can be computed for various phase angles by means of the ordinary equations of linear theory.[4] When plotted, as shown by the full-line curves at (d) in Fig. 1, the component will be seen to consist of sections of sine-waves of supply frequency except at the transition points where there are abrupt changes. These jerks, although partly a result of a change of amplitude, are mainly the reflexion of change of phase which is lagging in the permeable section and leading in the saturated.

Having obtained a graph of the forced component as at (d) in Fig. 1, we can, by subtracting it from the actual current *I* as at (c), immediately plot the semi-free component as at (e). The abrupt breaks which result from the approximation of the B/H loop by straight lines can be modified, as indicated by the smooth dotted transition sections in (d) and (e), to correspond with the curved nature of the actual "knees." These jerks in the semi-free component are the features that, as previously explained, cyclically maintain it in existence against the decay that occurs during the remainder of the cycle when it is force-free and consequently subject to linear theory equations for free components or, as they are more familiarly called, transients. For the permeable sections 2-3 and 4-1 of the B/H loop, calculations made with these equations on a typical ferro-resonant series-circuit show that the semi-free oscillation is lightly damped with a period

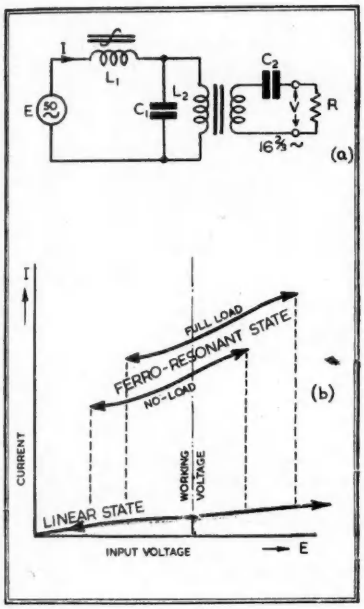

Fig. 3 (*Left*). **Ferro-resonance at sub-harmonic frequency (impulse started oscillations): (a) Circuit diagram; (b) R.M.S. current/voltage characteristics, showing transitions to linear state at both low and high voltages**

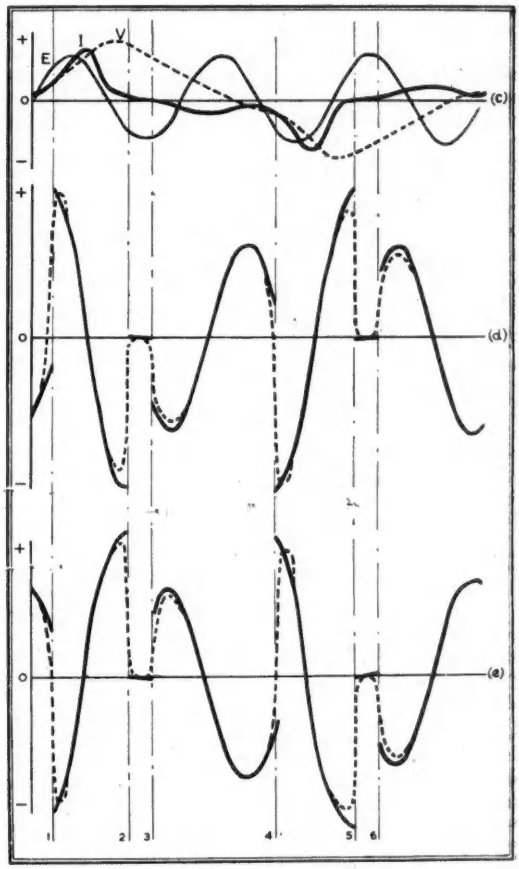

Fig. 3 (*Right*). **(c) Waveforms of input voltage E, output voltage V and current I; (d) Forced component of current I; (e) Semi-free component of current I. (Note that in (c) and (d) of both Figs. 1 and 3 the dotted portions graphically correct for the discontinuities arising out of the approximations made in the mathematical analysis)**

slightly exceeding that of the supply; and, as the current as shown at (e) in Fig. 1 is in amplitude roughly equal and opposite to the forced component at (d), the combination results in the almost horizontal parts of the actual wave of I at (c). For the saturated sections 1-2 and 3-4, similar calculations show that the semi-free oscillation is so near to critical damping and of such short period that, when the curvature of the "knee" is taken into account, it dies out after a short unidirectional pulse; and, as the current as shown at (e) in Fig. 1 preponderates in amplitude over the forced component at (d), the combination of both components also comprises a short unidirectional pulse.

The foregoing analysis leads us to the explanation of the functioning of ferro-resonance at fundamental frequency as follows. The inductor current, which controls the magnetisation, passes alternately through a long phase of a small magnitude oscillation having a natural period slightly longer than that of the supply, and then through a short phase of a heavy oscillation of single pulse type, having a much shorter natural period. With increase of input voltage, while the long phase will remain little altered, the short phase will become heavier in magnitude and shorter in period on account of the decreased incremental inductance, and the corresponding output voltage waveform V (at (c) in Fig. 1), although little larger, will approach nearer to a square shape. To prevent oscillations, once excited, from dying out, the jerks of the semi-free component must be not only correctly timed, but also sufficiently great: the input must consequently be of appropriate frequency and of correspondingly sufficient voltage. But, as correct timing depends on the natural period in the normal permeable state of the iron-core being but slightly longer than that of the supply, conditions are normally so near to resonance that ferro-resonance will be *self-starting* for input voltages exceeding the critical minimum by a small amount.

Ferro-resonance at Sub-harmonic Frequency

If, on the other hand, a resonant network containing a saturable iron-cored inductor has a natural period in the normal state so much longer than the supply period that ferro-resonance will not build up on application of even a very high voltage, similar heavy pulses of inductor current *I* initiated from an outside source, while no longer able to keep pace with successive alternations of the input E as at (c) in Fig. 1, may nevertheless be able to synchronise as at (c) in Fig. 3 with one in every three, or higher odd number, of alternations. Whether such ferro-resonance can be main-

tained or not will depend on whether the induced long-period oscillation can so adjust itself as to repeat cyclically. Should it do so, the repetition frequency, which is the reciprocal of the period, will be an odd-numbered sub-harmonic of the input frequency. If now the voltage and frequency applied to such an *impulse-started* circuit are varied, zones—graphically areas—in which ferro-resonance is maintained will be found to exist for each order of sub-harmonic in addition to the zone previously described for the fundamental mode. While the generation of even-numbered sub-harmonics without the aid of polarising current is somewhat fortuitous, and while their corresponding zones are very narrow, the zones of odd-numbered sub-harmonics, especially those of low order, are broad.[2] Therefore, in utilising a non-polarised ferro-resonant circuit as a frequency dividing power converter, the third, out of all possible sub-harmonics, will give not only the highest stability but also the greatest output efficiency.

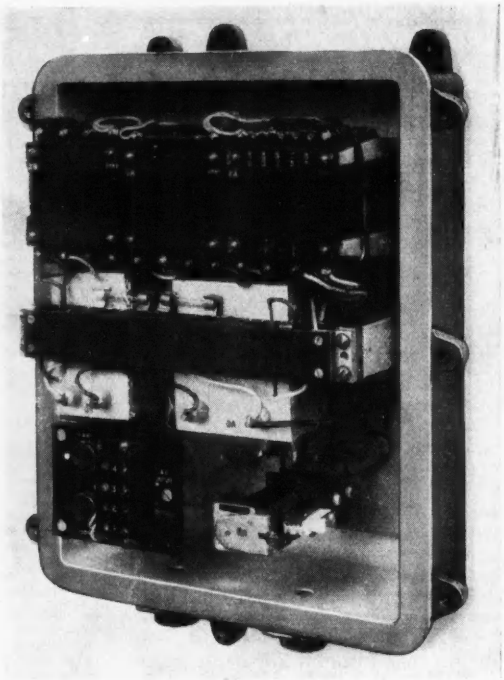

The photograph shows 5 watt ferro-resonant converter (hermetically sealed version), which reduces the 50 c/s mains frequency to 16⅔ c/s.
(Photo by courtesy of the Telephone Manufacturing Co. Ltd.)

The second example taken for analysis is the converter circuit of Fig. 3, which is ferro-resonant at the third sub-harmonic of the 50 c/s. input frequency. The complete unit, shown in the accompanying photograph, delivers power at 16⅔ c/s. from the mains for ringing telephone bells from private or branch exchanges in offices, factories, hotels, hospitals and similar situations where upkeep is restricted to the occasional visits of a maintenance engineer.[5,6] The network, besides the main inductance L_1 and capacitor C_1, has an output transformer L_2 which has, on account of its air gap, been considered linear enough for its inductance, at working flux density, to be used in the calculations. The additional capacitor C_2, although of sufficient capacitance to transmit the rated power of 5 watts at 75 volts to load resistance R, is incorporated to prevent ferro-resonance being stopped by the heaviest of resistance loads.

As in the previous example, the first step preparatory to analysis is to trace out the B/H loop of L_1 from an oscillogram. But careful examination under various conditions of ferro-resonance shows that accompanying the main loop there are, corresponding to the minor peaks in the current waveform *1* (Fig. 3c), always a pair of minor re-entrant loops M-M′ (Fig. 2a) located just above the "knees," although for clarity in reproduction they are shown below them as dotted lines. These minor loops, which only die out at the critical minimum input voltages represented for different load conditions by the left-hand dotted lines at (b) in Fig. 3, apparently correspond to an intermediate semi-saturated state of the inductor core. They behave perfectly regularly except when the input is raised somewhat above the working voltage, which is indicated by the chain-dotted line, when their increased irregularity eventually sets an upper voltage limit represented by the right-hand dotted lines. Growing in size with increase of input voltage, the minor loops appear to struggle for supremacy of peak current with the saturated parts of the main loop, and at voltages exceeding the limit the strife leads to such violent fluctuations that oscillation soon dies down to the low level linear mode.

Leaving aside the instabilities for the moment, and concentrating on the regular mode of oscillation at the working voltage, we draw a graph of the B/H loop, and approximate it as in Fig. 2 but with the addition of a pair of straight lines (not shown) to represent the minor loops. Then on the current waveform of Fig. 3c, we mark, corresponding to those instants when the magnetising force H reaches the corners of this approximate loop, vertical broken lines 1,2,3,4,5,6, from which it will be observed that the semi-saturated sections (3-4, 6-1) usurp the predominant role previously played by the permeable sections which here (2-3, 5-6) act for less than 10 per cent of the time.

Continuing as in the previous example we calculate and plot for each section the forced component of current as shown at (d) in Fig. 3. The curves are again portions of sine-waves of supply frequency with discontinuous jumps which are also reflected in the semi-free component (Fig. 3e) obtained by subtraction. As before, the jumps are rounded

by the dotted transition sections to take into account the curved nature of the actual B/H loop. The calculations that were made brought to light the important fact that the oscillations pass through resonance at the beginnings and ends of the saturated sections, and, whereas the jumps at transitions 3 and 6 to the semi-saturated sections are due mainly to an increase in amplitude, those at 4 and 1 to the saturated sections are due primarily to the consequent change of phase from lagging to leading. The jumps at 5 and 2 at the ends of the saturated sections finally restore both amplitude and phase so that the cycle is repeated.

On commencing analysis by network theory[4] the semi-free component was shown to consist of three sub-components, first an oscillatory one and then two non-oscillatory ones corresponding to the additions of transformer L_2 and output capacitor C_2. Unlike the high decrement existing during the saturated section in ferro-resonance at fundamental frequency when the semi-free component becomes damped out, the calculated decrement for all sub-components in each section is here so low that the semi-free oscillation is fully maintained throughout the cycle. The natural frequency of the oscillatory sub-component, which, it will be remembered, is excited by a 50 c/s. supply, was computed for the permeable, semi-saturated and saturated sections respectively, as 9, 40 and 58 c/s. Before the sub-components may be plotted, however, it is necessary to know the amplitudes of each, as well as the phase of the oscillatory one. These values depend on the initial conditions for which in this case four parameters measured from graphs like Fig. 3e are required. From curves of the sub-components, which were in this way calculated and plotted for the semi-saturated section, it was found that the non-oscillatory sub-components, which are opposite in sign to one another, were roughly equal although about one-third of the amplitude of the oscillatory sub-component which in its turn was roughly equal and opposite to the forced component.

This balancing, which the analysis brought to light, of the various components during the semi-saturated section, not only accounts for the actual current in this section remaining for such a comparatively long time with little variation, but is the key to the explanation we are seeking. Ferro-resonance at sub-harmonic frequency, it appears, is an alternation between a long oscillation of slightly lower natural frequency than the supply during a semi-saturated condition, and a shorter oscillation of slightly higher natural frequency during a saturated condition, while, as the current changes direction after the latter, there intervenes a very short commutating period corresponding to the normal permeable condition.

It will now be seen that ferro-resonance at either fundamental or sub-harmonic frequency demands, for regular timing of the saturating current pulses, an intervening oscillation, not just of a comparatively low current value, but having a period slightly longer than that of the supply. Any inability of the oscillations, therefore, after leaving a saturated state, to tide over the necessary time—about one complete period of the supply in the case of the third sub-harmonic—before entering the opposite saturated state, will upset the orderly type of oscillations which have just been analysed. It is this disability, when over-driving the sub-harmonic circuit by excessive input voltages, that explains the disorderly oscillations described previously, as well as their tendency to die out. If, on the other hand, the voltage is so low that not enough energy is absorbed from the supply to maintain oscillations in a semi-saturated condition, it will again be seen that ferro-resonance must cease.

References.

[1] J. G. Fallou: "Sur un Démultiplicateur de fréquence statique." *Rev. Gen. d'Elec.*, 19, p. 897 1926.

[2] E. Rouelle: "Contribution à l'étude experimentale de la ferro-resonance." *Rev. Gen. d'Elec.*, 40, p. 715 and 763, 1936.

[3] A. Boyajian: "Mathematical Analysis of Non-linear Circuits." *Gen. Elec. Rev.*, 34, p. 531 and 745, 1931.

[4] E. A. Guillemin: "The Classical Theory of Lumped Constant Networks." Vol. 1 of *Communication Networks*. John Wiley & Sons, 1931.

[5] F. R. Davey: "A Mains Frequency Converter for Ringing Supplies." *P.O.E.E.J.* p. 110. Jan., 1944.

[6] B. Drake: "Frequency Converters." *Brit. Eng. Export Jour.* p. 1589. June, 1947.

Television For All

"HIS Master's Voice" announce that they have gone into quantity production with a first-class "Popular" television receiver at only 36 guineas (excluding purchase tax £8 12s.).

The new H.M.V. receiver model 1807 is a 14-valve television table model for D.C./A.C. mains and has a 10-in. Emiscope tube of the latest aluminised type giving a picture size of 9 in. by 7 in. approximately, with a brilliancy of twice that of the normal tube. A brief circuit description of the new receiver is as follows:—

T.R.F. circuits of high efficiency are employed for both sound and vision channels. Provision is made for the connexion of a suitable pre-amplifier in order to increase the range of the receiver if necessary. Focusing is achieved by means of a special permanent magnet assembly. The E.H.T. is obtained by utilisation of the line generator fly-back voltage and H.T. rectification is provided by a metal rectifier.

A Modern Home-Built

TELEVISOR

ANNOUNCEMENT

Components

Components additional to those given in the December, 1948, issue as having been approved for use in the *Electronic Engineering* Televisor have now been tested. The full list of such components approved, to date, now reads:—

Scanning Coils
(i) Haynes Radio Ltd.
(ii) Scanco Ltd.

Focus Coil
(i) Albert Mnfg. Co.
(ii) Haynes Radio, Ltd.
(iii) Porthminster Engineering, Ltd.
(iv) Scanco, Ltd.
(v) Walpole Norman Engg. Co., Ltd.

Line Output Transformer
(i) Haynes Radio, Ltd.
(ii) Scanco, Ltd.
(iii) Walpole Norman Engg. Co., Ltd.

E.H.T. Transformers
(i) Haynes Radio, Ltd.
(ii) Partridge Transformers, Ltd.
(iii) Varley (Oliver Pell Control), Ltd.
(iv) Vortexion, Ltd.
(v) Woden Transformer Co., Ltd.

H.T. Transformer
(i) Gardners' Radio, Ltd.
(ii) Partridge Transformers, Ltd.
(iii) Varley (Oliver Pell Control, Ltd.).
(iv) Vortexion, Ltd.
(v) Woden Transformer Co., Ltd.

250mA and 80mA Chokes
(i) Gardners' Radio, Ltd.
(ii) Partridge Transformers, Ltd.
(iii) Varley (Oliver Pell Control, Ltd.).
(iv) Vortexion, Ltd.
(v) Woden Transformer Co., Ltd.

Albert Manufacturing Co. have also submitted a satisfactory chassis complete with valve holders and coil formers.

Variable Frequency R-C Oscillators

By F. BUTLER, B.Sc., M.I.E.E.

WIDE range audio-frequency generators are commonly of the heterodyne type. To avoid waveform distortion at low audio frequencies the beating oscillators must be entirely free from mutual coupling, and careful control of the two input levels to the detector is normally required. Frequency stability is poor, especially at low output frequencies, unless particular care is taken to ensure that the beating oscillators are physically and electrically similar. To offset these disadvantages, the beat frequency oscillator has two features of great practical convenience. A wide range of frequency can be covered in a single range, and the frequency scale can be made to conform with any desired law of variation.

In recent years, various forms of phase-shift oscillator have been developed and models have been designed to cover the full range of audio and video frequencies. The basis of all these is a frequency-selective network associated with a suitable amplifier. The conditions necessary for the production of sustained oscillations in a system of this kind are that the attenuation in the network must be balanced by a corresponding amplifier gain, and that the phase-shift round the loop, including the amplifier and the network, should be zero or a multiple of 360 degrees.

The electrical networks applicable to oscillators of this kind are of three general types:

(a) Lattice or bridge circuits in which certain elements are reactive.

(b) Bridged-T or twin-T arrangements, electrically equivalent to their corresponding lattice structures.
These circuits have the advantage that one terminal is common to both input and output.

(c) Recurrent ladder networks in which the series and shunt elements are, respectively, resistances or reactances.

Networks of types (a) and (b) are employed in most wide-range oscillators at present on the market.

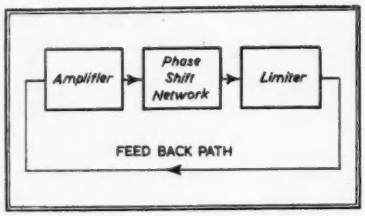

Fig. 1. Fundamental circuit for phase shift oscillator

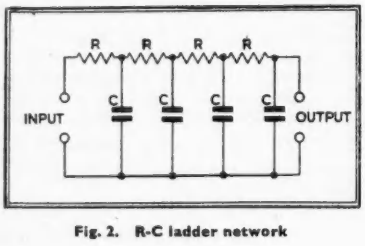

Fig. 2. R-C ladder network

Recurrent networks of type (c) are more usually applied to oscillators built in as an integral part of more complex equipment.

At a given frequency the output of any of the above networks is strictly proportional to the amplitude of the input voltage, on the assumption that linear circuit elements are employed. Minor departures from linearity, negligible in this connexion, are exhibited by certain types of resistances and capacitors. The response of the network is in marked contrast with the non-linear characteristics of the associated amplifier. To secure an output with a good waveform, it is essential to include some form of limiter which will restrict the amplitude of the amplifier output voltage. When such a limiter is included, it is possible to devise an extremely simple oscillator giving a satisfactory performance in respect of waveform.

Choice of Phase-Shift Network

Referring to Fig. 1, there is a wide choice of suitable phase-shift circuits. The preferred choice is settled by considerations of attenuation, harmonic rejection, ease of adjustment of operating frequency and circuit simplicity. On these grounds the ladder network shown in Fig. 2 has been selected.

For convenience, four R-C sections are shown, but an oscillator can be made to work satisfactorily with three or more. The network is associated with a single resistance-coupled amplifier valve. At one particular frequency the phase change in the network is 180 degrees so that when the output is back-coupled to the amplifier input, conditions are favourable for the production of sustained oscillations, provided only that the amplifier gain exceeds the network attenuation.

The frequency at which a given R-C network produces a phase shift of 180 degrees, *i.e.*, the operating frequency, is tabulated below for three-, four-, five- and six-stage circuits, together with the corresponding voltage attenuation. The attenuation decreases with an increase in the total number of stages, and there is a much greater attenuation of the higher harmonics in the more complex networks.

It will be seen that any increase, above four, in the number of stages results only in a small decrease in attenuation, and it is not economically justifiable to provide for a much greater number, though there are advantages from the point of view of harmonic filtering.

Number of Stages	Attenuation Ratio	Operating Frequency
3	29	$f = \frac{0.8}{CR}$
4	18.4	$\frac{0.38}{CR}$
5	16.15	$\frac{0.23}{CR}$
6	13.72	$\frac{0.16}{CR}$

The frequency will be given in cycles per second with C in microfarads and R in megohms. In the particular case of a 4-gang variable capacitor

(0.0005 μF per section) associated with 1 MΩ resistances, the lowest attainable frequency is 760 c/s. The use of 5 MΩ resistors brings this down to 152 c/s.

In R-C oscillators of this type, variable capacitors are employed as the frequency-controlling elements, in preference to ganged potentiometers, because of their higher stability and greater re-set accuracy. It is then necessary to accept the use of extremely high resistances in order to generate very low audio-frequencies, and this limitation is often responsible for poor performance at this end of the range, although, by good design, the worst effects may be avoided.

With a given selection of resistors, the maximum frequency of operation is settled by the minimum capacitance of the sections. When care is taken in the circuit wiring to keep this figure low, and to equalise the minimum capacitances of all the sections, it is possible to make the maximum frequency at least 20 times the minimum, though, under these conditions, frequency stability will not be high. At the expense of reduced range, the stability may be raised by using padding capacitors in parallel with the gang sections.

Practical Oscillator Circuit

Fig. 3 gives the circuit diagram of an oscillator which in one range will cover frequencies between 250 and 5,000 c/s., using the component values shown.

The output from the network is taken to a cathode follower V_2 which provides the desired output and which also supplies the driving voltage to V_1. The main object in using a cathode follower is to ensure that the output from the phase shift network is applied to a stage with an exceedingly high input impedance. A valve with a top-cap control grid connexion is desirable. The Mazda SP 41, or its 6-volt equivalent, is suitable for use in both positions.

A few additional circuit details call for comment. A species of limiting is provided by the 15 W metal filament lamp used as the bias resistance of V_1. Table 1 shows the measured resistance of such a lamp with different applied voltages.

Any increase in the r.m.s. value of the anode current of V_1 is accompanied by an increase in the lamp resistance, and hence in the effective cathode bias. The amplifier gain is reduced, and its output partially stabilised.

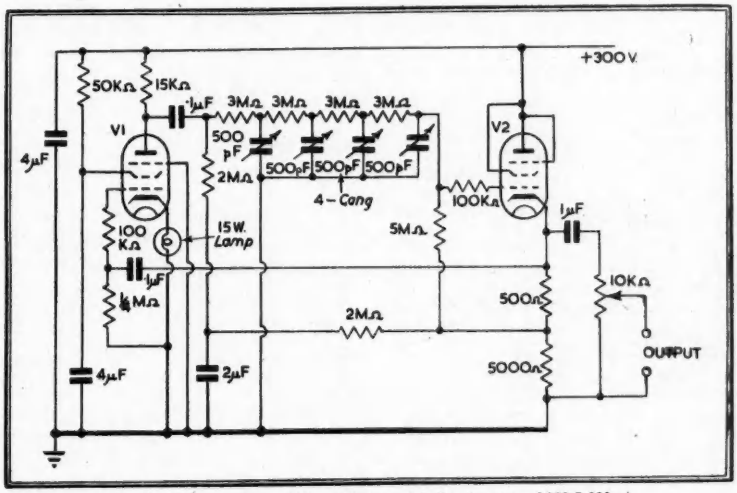

Fig. 3. Simple phase shift oscillator with fixed range of 250-5,000 c/s

The 100 kΩ resistance in series with the grid of V_1 limits the amount of possible grid current and thus restricts the drive to V_1. A network consisting of two high resistances and a shunt capacitor links the output side of the amplifier coupling capacitor to the junction of the cathode follower bias and load resistors. The purpose of this network is to minimise the effect of D.C. leakage through the coupling capacitor, which, if allowed to flow through the 5 MΩ grid leak of the cathode follower, would set up a positive bias voltage across it. The 2 μF capacitor, connected between earth and the junction of the two 2 MΩ resistors serves to filter out all audio signals. With this network connected there would seem to be no purpose in providing an additional grid leak for the cathode follower. The reason for including the 5 MΩ resistor is to reduce the grid-cathode resistance to a moderate value. Omitting the 5 MΩ leak, the grid-cathode resistance would be 16 MΩ. When it is included, the figure falls below 4 MΩ. Neglect of this precaution requires the special selection of gas-free valves, and is the cause of potential trouble when very low output frequencies are required. Ceramic insulation is desirable in the gang capacitor, and all wiring associated with the phase-shift network should be highly insulated.

TABLE 1
CHARACTERISTICS OF 15W VACUUM LAMP

Applied Voltage	Current (mA.)	Resistance	Power Consumption
1	2.4	396	2.4 mW
2	3.8	525	7.6 ,,
3	4.8	630	14.4 ,,
4	5.7	700	22.8 ,,
5	6.6	760	33.0 ,,
10	10.0	1,000	100 ,,
15	12.9	1,160	194 ,,
20	15.1	1,320	302 ,,
25	17.8	1,400	445 ,,
30	20.0	1,500	600 ,,
40	22.9	1,740	916 ,,
50	27.0	1,850	1.35 W
75	34.7	2,160	2.16 ,,
100	41.7	2,390	4.17 ,,
150	52.5	2,860	7.9 ,,
200	63.1	3,170	12.62 ,,
230	69.2	3,280	15.9 ,,
250	72.4	3,460	18.1 ,,

The circuit shown in Fig. 3 is extremely simple and reliable. The frequency coverage is adequate for many purposes, and though the output is a few volts only, the level can be raised by the use of one additional output stage. If a wider range is required, then switching of the phase-shift components will be necessary. This operation calls for considerable care in design, because of the very large values of resistance and reactance in the phase-shift network. To preserve the simplicity of Fig. 3 and still give a wide frequency coverage in a number of separate ranges, it is possible to mount the four-phase shift resistances on an insulating strip fitted with plug contacts engaging corresponding sockets on the gang capacitor stators. Range-changing is achieved by plugging in different resistance groups. Once the resis-

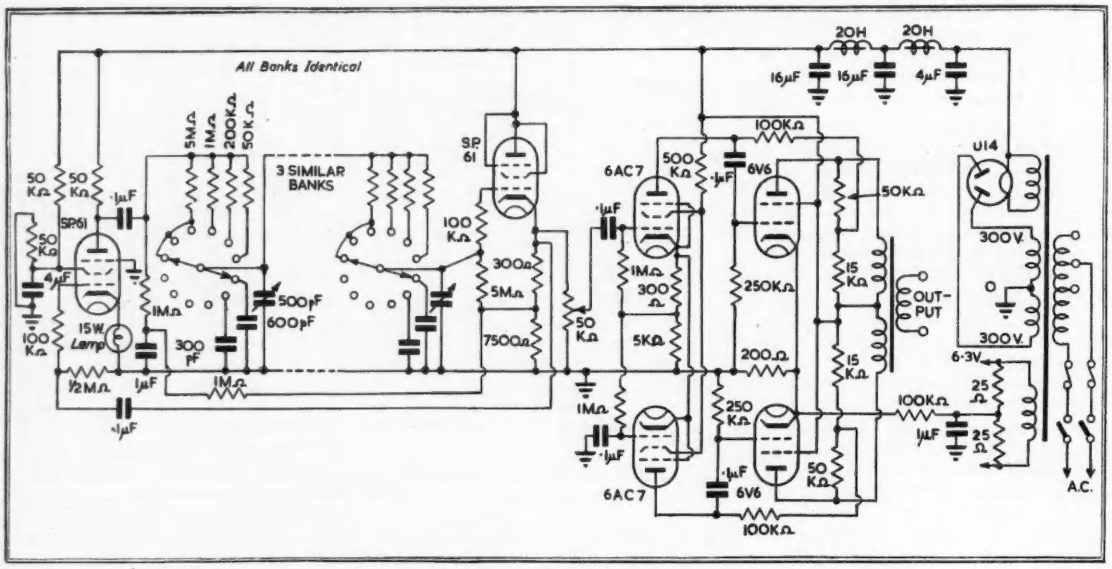

Fig. 4. Complete circuit diagram of switched phase shift oscillator and amplifier covering range 25-17,000 c/s in six steps

tance values are settled to cover a particular range, other ranges can be calculated, bearing in mind that in circuits of this kind, the operating frequency is inversely proportional to the resistance. Thus, to halve the frequency corresponding to a particular setting of the gang capacitor, the associated resistance is doubled.

If the range-switching facility is essential, then two requirements must be met. First, the switch wafer insulation must be extremely good, and ceramic construction is desirable. In the second place, the switch banks must be screened electrostatically from each other, and the resistors connecting adjacent banks must be mounted in such a way that they have their ends in separate compartments, the body of each resistor being passed through a bushed hole in the inter-switch screen. If these precautions are observed, a satisfactory performance can be attained, but the mechanical construction of the oscillator becomes far more complex.

Fig. 4 gives the circuit diagram of a switched oscillator, covering 25 c/s. to 17,000 c/s. in six ranges. It is basically similar to that of Fig. 3, but includes an audio-frequency amplifier covering the above range.

The optimum anode-to-anode load of the output stage is 10,000 ohms, and an output of 1 watt is available with low distortion. Precise measurements of harmonic content have not been made, but a simple check at 1,000 c/s., using a twin-T null network to suppress the fundamental frequency, shows that the r.m.s. value of the residual harmonics is not greater than 5 per cent of the fundamental amplitude. In common with other apparatus of this class, the performance deteriorates at frequencies below 100 c/s., although, even at 25 c/s. there is no visible distortion on the oscillograph trace of the output waveform. The effect of power supply hum is just perceptible at near multiples of 50 c/s., and shows up as a very shallow beating or modulation on the output. The visual indication of this naturally disappears when the oscillator frequency is an exact multiple or sub-multiple of the power supply frequency.

The amplifier employs a cathode-coupled phase inverter and negative feedback is applied to the penultimate stage from the 6V6 anodes.

With the component values shown in Fig. 4, the frequency coverage is as shown in the Table:

Range 1	...	25	— 34 c/s.
2	...	32	— 60 c/s.
3	...	50	— 250 c/s.
4	...	200	— 1,100 c/s.
5	...	1,000	— 5,000 c/s.
6	...	3,500	— 17,000 c/s.

The layout of the oscillator and amplifier components should conform to normal audio-frequency practice, and the only difficulty likely to be experienced is in the effective shielding of the high impedance phase shift network from extraneous electrostatic fields. Provided that care is taken over this single point, there is no difficulty in constructing the entire equipment to give a very satisfactory performance.

The simplest method of calibrating the various range scales is by the use of an auxiliary oscillator in conjunction with a cathode-ray tube, using the Lissajous' figure method of frequency comparison.

References

Terman, Buss, Hewlett and Cahill, "Some Applications of Negative Feedback," *Proc. I.R.E.* Vol. 10, p. 649. October, 1939.

H. H. Scott, "A New Type of Selective Circuit," *Proc. I.R.E.*, Vol. 26, p. 226. February, 1938.

Ginzton and Hollingsworth, "Phase Shift Oscillators," *Proc. I.R.E.*, Vol. 29, p. 43. February, 1941.

W. N. Tuttle, "Bridged-T and Parallel-T Circuits," *Proc. I.R.E.*, Vol. 28, p. 23. January, 1940.

F. W. Dawe, "Wide Range Audio Oscillator," *Electronic Engineering*, p. 246. August, 1947.

NOTES FROM THE INDUSTRY

R.G.D. and Mersey Harbour Control

The Port of Liverpool is to be equipped with radio-telecommunication equipment. This is to enable the fullest use to be made of the port's radar installations and to save valuable time in the turnround of shipping.

Portable radio-telephone transmitter receivers and shore station equipment are being specially designed and made for this work by R.G.D. of Bridgnorth.

The installation, it is claimed, will be the first of its kind in the world and has already attracted considerable attention among American shipping authorities.

Royal Netherlands Fair

The Royal Netherlands Industries Fair held twice a year at Utrecht, Holland, is one of the most important business events on the Continent.

The first Fair in 1949 will be from March 29 until April 7.

ELECTRONIC ENGINEERING together with the other publications of Morgan Bros., Ltd., will be shown on Stand No. 5201, General Section, Main Building, Vreeburg.

The Stand will be under the management of Mr. S. H. Hartog, our Subscription Representative for the Netherlands, who will be pleased to assist and advise all visitors.

Those unable to visit the Fair can communicate with Mr. Hartog c/o Hotel Kasteelvan, Antwerpen, Utrecht.

Plessey Engineering Apprenticeship Scheme

The Plessey Company, Ltd., Ilford, Essex, have revised their apprenticeship scheme which is open to juveniles between the ages of 16 and 17 years without payment of a premium.

Although intended primarily as a trade training course apprentices who, by their progress, demonstrate their aptitude for technical occupations, will when their indentures are endorsed at the age of 18, have courses of training laid out to qualify them as draughtsmen or technical assistants.

Since only a limited number of apprentices can be absorbed each year, selection will be made purely on merit and applicants will be required to pass an entrance examination as determined by the Apprenticeship Committee. Courses will normally commence in March and September of each year, the appropriate application forms having to be completed and returned by January 1 and July 1 respectively.

Government Department Electrical Specifications

The Committee on the Standardisation of Electrical Cables and Wires for Government Services (Secretary, Ministry of Supply I.E.M.E. "Walsingham," Chislehurst, Kent) have recently issued a revised version of G.D.E.S. 22-1948 for Equipment Wires. Some types and sizes have been deleted from the previous issue and a number of other minor modifications made. Copies can be obtained from H.M.S.O. price 3d.

Changes of Address

Messrs. A. B. Metal Products, Ltd., have opened a London office at Ludgate House, 107 Fleet Street, London, E.C.4. The telephone number is Central 5667.

The address of the Sheffield office of Wild-Barfield Electric Furnaces, Ltd., and their associates, Messrs. G. W. B. Electric Furnaces, Ltd., is 4 Paradise Square, Sheffield 1. The telephone number remains unaltered as Sheffield 22776.

Raymond Electric Ltd., announce that they have taken over a larger factory at Brent Crescent. The new address and telephone number is: Brent Crescent, North Circular Road, London N.W.10. Telephone No. ELGar 6687.

Agents for Birmingham Sound Reproducers, Ltd.

Messrs. N. Miers and Co., Ltd., of 115 Gower Street, London, W.C.1 (telephone number Euston 7515) have been appointed agents in London and the South for the special products division. This covers the new range of scientific instruments, including beat frequency oscillators, valve voltmeters, harmonic analysers and vibration analysing equipment. Messrs. N. Miers and Co., Ltd., are also in a position to give direct assistance to those concerned with the normal range of products such as sound amplification and recording equipment.

New Maintenance Depot at Croydon

New developments in the organisation of their air radio department, including the extension of repair, maintenance and instructional facilities at Croydon Airport, are announced by Marconi's Wireless Telegraph Co., Ltd., Chelmsford. This is a revival of facilities available before the war when the Marconi's main air service depot at Croydon, provided a valuable service to the commercial air lines operating from that airport.

In order to bring about even closer co-operation with the company's development and production sections engaged on air radio projects, Marconi's aeronautical division has now been centralised at Chelmsford, Essex, under the Manager of the Aeronautical Division, Mr. L. A. Sweny. The staff of the air radio department dealing with sales and contract matters who, until recently, were at Hackbridge, have accordingly been transferred to head office at Chelmsford.

The telephone number of the Croydon establishment is Croydon 7744.

Publications Received

"Low Temperature Brazing Tungsten Carbide Tool Tips" (Publication No. 2128). An informative booklet well illustrated with clear photographs and simple diagrams, published by: *Johnson Matthey & Co., Ltd.*, 78-83 *Hatton Garden, London, E.C.*1.

"The Triple Diode A.V.C. Circuit." Another of the excellent Mullard Technical Reports (No. 9/1948) issued, primarily for the benefit of equipment designers, by *Mullard Electronic Products Ltd., Century House, Shaftesbury Avenue, London, W.C.*2. Copies are not available for general circulation.

Oscillograph Equipment and *M*731 *Universal Reading Camera.* Two highly informative and delightfully produced booklets on some of the equipment manufactured by *Southern Instruments, Ltd., Fernhill, Hawley, Camberley, Surrey.*

Trix Quality Sound Equipment. Folder containing illustrated lists of their full range of loudspeakers, amplifiers and allied equipment issued by *The Trix Electrical Co., Ltd.*, 1-5 *Maple Place, Tottenham Court Road, London, W.*1.

"Eddystone Short Wave Components" (Publication No. WL56811 Price 6d.) and "The Eddystone 145 Mc/s. Guide" (Price 1s. 6d.) received from *Stratton & Co., Ltd., Birmingham,* 31.

"Ediswan Mazda B8A Valves—and others in the A.C. range." (Publication No. R1339) giving ratings, operating and capping data. Issued by *The Edison Swan Electric Co., Ltd.*, 155 *Charing Cross Road, London, W.C.*2.

"Corrugated Perspex"

Three booklets (1) 453/53/1247, (2) R1/396/14/648, (3) R1/2Ed/454/24/748 giving technical notes and applications of this product have been received from *Imperial Chemical Industries, Ltd.*

"Wiggin Nickel Alloys." Periodical notes on the properties of nickel and nickel alloy products (formerly called "Monel Notes") obtainable on application from *Henry Wiggin & Co., Ltd., Wiggin Street, Birmingham,* 16

Telcon Metals.

Publication No. M44 relating to Transformer and Choke Laminations in MUMETAL, RADIOMETAL and RHOMETAL.

The Telegraph Construction and Maintenance Co., Ltd.,
*22 Old Broad Street, London, E.C.*2.

APRIL MEETINGS

The Institution of Electrical Engineers

All meetings, unless otherwise specified, are held at the Institution of Electrical Engineers, Savoy Place, London, W.C.2.

Ordinary Meeting

Date: April 21. Time: 5.30 p.m.
The 40th Kelvin Lecture—"Semi-Conductors and Rectifiers."
By: Professor N. F. Mott, M.A., F.R.S.

Radio Section

Date: April 6. Time: 5.30 p.m.
Lecture: "Hot-Cathode Thyratrons: Practical Studies of Characteristics."
By: H. de B. Knight, M.Sc.

Date: April 12. Time: 5.30 p.m.
Informal Lecture: "Radio-Frequency Heating."
By: R. H. Barfield, D.Sc.

The Secretary, The Institution of Electrical Engineers, Savoy Place, London, W.C.2.

Cambridge Radio Group

Date: April 26. Time: 8.15 p.m.
Held at: The Cavendish Laboratory.
Lecture: "Meteors."
By: A. C. B. Lovell, O.B.E., Ph.D.

Hon. Secretary: G. E. Middleton, M.A., University Engineering Laboratory, Cambridge.

South Midland Radio Group

Date: April 28. Time: 6 p.m.
Held at: The James Watt Memorial Institute, Great Charles Street, Birmingham.
Lecture: "Some Aspects of Gramophone Reproduction."
By: K. N. Hawke, B.Sc.

Secretary: E. May, Birmingham Electric Furnaces, Ltd., Tyburn Road, Birmingham, 24.

North-Western Radio Group

Date: April 27. Time: 6.30 p.m.
Held at: The Engineers' Club, Albert Square, Manchester.
Discussion: "Audio-Reproduction."
Opened by: G. J. Scoles, B.Sc.(Eng.), A. G. F. Smith, and G. I. Thomas, B.Sc.

Secretary: A. L. Green, 244 Brantingham Road, Chorlton-cum-Hardy, Manchester, 21.

North Staffordshire Sub-Centre

Date: April 22.
Held at: The English Electric Company's Hall, Stafford.
Annual General Meeting and Lecture: "Television Developments."
By: K. R. Sturley, Ph.D.

Secretary: D. Smith, 82 Beatty Hall, Stone, Staffs.

Institute of Physics

Electronics Group

Date: April 12. Time: 5.30 p.m.
Held at: 47 Belgrave Square, London, S.W.1.
Lecture: "The use of Electronic Devices for Measurement of Lifetimes in Nuclear Physics.
By: Dr. J. Rotblat.

Hon. Secretary: G. W. Warren, Research Laboratory, The General Electric Co., Ltd., Wembley, Middx.

Midland Branch

Date: April 7. Time: 6.30 p.m.
Held at: The Imperial Hotel, Birmingham.
Lecture: "Physics in Steel Manufacture."
By: Dr. C. Sykes, F.R.S.

Hon. Secretary: Dr. J. H. Nelson, Messrs. Joseph Lucas, Ltd., Gt. King Street, Birmingham.

The Television Society

Date: April 1. Time: 6 p.m.
Held at: The Waldorf Hotel, Aldwych, London, W.C.2.
Annual General Meeting followed by the Annual Dinner at 7.30 p.m. Full details may be obtained from Mr. T. M. C. Lance, 35 Albemarle Road, Beckenham, Kent.

Midlands Centre

Date: April 8. Time: 7 p.m.
Held at: Room 6, The Chamber of Commerce, New Street, Birmingham.
Lecture: "Electronic Testing Instruments."
By: A. E. Crawford.

Lecture Secretary: Dr. W. Summer, 31 Beech Road, Bournville, Birmingham.

Constructors' Group

A Constructors Group in connexion with the Midlands Centre has now been started. Regular meetings are held at the Church Hall, Beaumont Road, Bournville, on Monday evenings at monthly intervals. Further details may be obtained from Mr. R. Baxendale, 50 Alcester Road, Birmingham, 13.

British Sound Recording Association

Date: April 6. Time: 7.15 p.m.
Held at: The Gaumont British Theatre, Film House, Wardour Street, London, W.1.
Lecture: "Developments in Magnetic Sound-on-Film."
By: Dr. O. K. Kolb.

Note—This is a joint meeting with the British Kinematograph Society.
Hon. Secretary: R. W. Lowden, "Wayford," Napoleon Avenue, Farnborough, Hants.

Institution of Electronics

Midlands Branch

Date: April 20. Time: 7 p.m.
Held at: Room 7, The Chamber of Commerce, New Street, Birmingham.
Lecture: "Servo Mechanisms."
By: Professor A. Tustin, M.Sc.

Lecture Secretary: Dr. W. Summer, 31 Beech Road, Bournville, Birmingham, 30.

R.S.G.B.

Date: April 29. Time: 6.30 p.m.
Held at: The Institution of Electrical Engineers, Savoy Place, London, W.C.2.
Lecture: "Some Aspects of High Quality Sound Recording and Reproduction."
By: R. W. Lowden.

The Secretary: New Ruskin House, Little Russell Street, London, W.C.1.

Society of Instrument Technology

Date: April 27. Time: 7 p.m.
Held at: The Royal Society of Tropical Medicine and Hygiene, Manson House, Portland Place, W.1.
Lecture: "The Telerecording of Thickness, Pressure, Flow and other Physical quantities using a simple electro-magnetic circuit."
By: Dr. W. J. Clark.

Hon. Secretary: L. B. Lambert, 56 Tudor Gardens, London, W.3.

Brit. I.R.E.

London Section

Date: April 21. Time: 6 p.m.
Held at: The London School of Hygiene and Tropical Medicine, Keppel Street, London, W.C.1.
Discussion: "Frequency Modulation and Amplitude Modulation."

The Secretary: The British Institution of Radio Engineers, 9 Bedford Square, London, W.C.1.

South Midlands Section

Date: April 28. Time: 7 p.m.
Held at: The Technical College (Room A5), The Butts, Coventry.
Lecture: "Electronic Voltmeters."
By: R. A. Lampitt.

Secretary: C. Stokes, 6 Esterton Close, Coventry.

Radar Association

London Branch

The above branch holds its meetings on the first Tuesday of each month at the Albert Tavern, Victoria Street, London, at 7 p.m. Further details may be obtained from The Honorary Secretary, Radar Association, 70 High Holborn, London, W.C.2.

ABSTRACTS OF ELECTRONIC LITERATURE

CIRCUITS

Pentriode Amplifiers

(H. M. Zeidler and J. D. Noe)

Conventional video-amplifier design is complicated by low-frequency phase shift and degenerative decrease in gain caused by inefficient screen-grid and cathode by-pass circuits. This paper describes two amplifier circuits in which phase shift and degeneration in those by-pass circuits may be eliminated throughout the entire range to zero frequency. Small paper or mica capacitors may be substituted for bulky electrolytic units, with consequent improvement in electrical and physical amplifier characteristics.

These circuits are applicable to amplifiers with stage gains less than the control-grid to screen-grid amplification factor of the tube. Inasmuch as common tubes have factors ranging from approximately 10 to 50, the circuits described are primarily applicable to video amplifiers. In practice, the interstage circuits are designed in accordance with conventional methods involving either two-terminal or four-terminal networks. The by-pass circuits described may then be incorporated into the design to provide the advantages outlined above with no loss in stage gain.

—*Proc. I.R.E.*, November, 1948, p.1,832.

Shunted-Amplifier Input Admittance

(A. Shadowitz)

A method is presented for finding the input admittance of an amplifier having a shunt impedance between its output and input. The shunted-amplifier gain is the sum of two terms that have simple physical significance. Several cases are worked out for a shunting capacitance, and include a single stage with both resistive and tuned loads and a double stage with resistance-capacitance coupling. Application to a frequency modulator is given in detail. Extensions are indicated to the theory of the tuned-plate tuned-grid oscillator, multivibrator, and negative-impedance devices.

—*Elect. Comm.* December, 1947, p.468.

F-M Receiver Design Problems

(E. C. Freeland)

A survey of design and production techniques, including an evaluation of limiter-discriminator, ratio, and synchronised-oscillator detectors. Hum reduction and the tracing and elimination or regenerative effects in I.F. and R.F. stages, particularly for A.C./D.C. receivers, are described.

—*Electronics*, January, 1949, p.104.

THERMIONIC DEVICES

Microphonism in a Subminiature Triode

(V. W. Cohen and A. Bloom)

The simple theory of the symmetrical plane triode has been applied to the calculation of the change in plate current as a function of motion of the grid and cathode. For perfect symmetry, the first-order approximation gives zero change in current. The second-order expressions are evaluated and show that an output signal may be expected having twice the vibration frequency. A description is given of equipment for vibrating a tube for test, measuring the amplitude of vibration, detecting very small resonance of tube parts, and studying the wave form of the electrical output.

Experimental studies have been made on tubes to determine the mechanical origin of several different forms of electrical output. In some cases, individual tubes which exhibited particular forms of microphonism have been opened up, the structure altered, and the tube operated under vibration in an evacuated bell jar. In this way, the mechanical origin of particular forms of microphonism were determined quite definitely. A few general comments are given regarding tests for microphonism, and the design of tubes.

—*Proc. I.R.E.*, August, 1948, p.1,039.

Duplex Tetrode UHF Power Tubes

(P. T. Smith and H. R. Hegbar)

The major factors affecting the design and development of wide-band UHF power tubes are considered and emphasis is given to the television application. A qualitative discussion of methods for obtaining the required performance is presented, and a 5 KW 300 Mc liquid-cooled, internally neutralised duplex tetrode is described.

—*Proc. I.R.E.*, November, 1948, p.1,848.

Geiger Müller Counters

This symposium on Geiger Müller counters comprises the following three articles: (1) "Some Geiger-Müller and proportional counters of spherical shape," by G. Salvini, (2) "A new quenching circuit for Geiger counters," by H. Maier-Leibnitz, and (3) "Circuits for testing efficiency of Geiger counters," by G. E. Hagen and D. H. Loughbridge.

—*Rev. Sci. Inst.*, August, 1948, p.494.*

* Abstract supplied by courtesy of Metropolitan-Vickers Electrical Co. Ltd. Trafford Park, Manchester

INDUSTRY

A Digital Computer for Scientific Applications

(C. F. West and J. E. deTurk)

During the past two years development has been initiated on several large-scale automatic digital computing machines, both in this country and abroad. The present paper is concerned with the over-all organisation of one such machine. A logical division of the machine into four major components is described, and the machine performance is interpreted in terms of these component functions. The electronic techniques used to accomplish the storage, transmission, and arithmetic manipulation of numbers, together with certain methods used for control of the computer, are briefly discussed. Although the paper is concerned with the design of a particular machine, it is felt that the design problems and engineering techniques are applicable to most large-scale computing machines.

—*Proc. I.R.E.*, December, 1948, p.1,452.

Ultrafax

A new facsimile method uses cathode-ray tubes as light sources at both transmitter and receiver. Ultimately high-speed transmission depends upon 10-megacycle microwave relay chains. Receiving device uses photographic film that can be developed in a few seconds.

—*Electronics*, January, 1949, p.77.

Shutterless Television Film Projector

(L. C. Downes and J. F. Wiggin)

Motion pictures on 16-mm. film are converted from 24 to 30 frames per second. Electron tubes control speed and phase of projector driving motor, pulse and synchronise the light sources and provide the accompanying sound.

—*Electronics*, January, 1949, p.96.

Nickel-Iron Alloy Dust Cores

(S. E. Buckley)

The development of dust cores to meet the increasing demand for use in telecommunications equipment is outlined. Requirements for such uses are defined, a high and constant permeability and low losses in the core being the most important. Among the materials used for dust cores described are electrolytic iron, Permalloy (nickel-iron), and molybdenum-Permalloy.

The constancy of permeability and its influence on design, the question of calculating the dust-core permeability from inherent properties of the metal, and core losses are discussed.

The effective resistances at audio-frequencies of dust-cored coils of various materials are compared.

—*Elect. Comm.*, June, 1948, p.126.

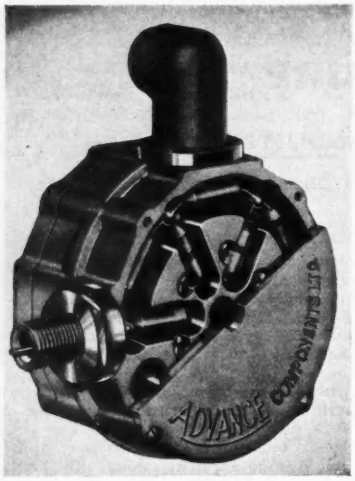

Advance Attenuator (type A.38)

(Illustrated above)

THIS attenuator has been designed primarily for use in radio frequency standard signal generators. It can, however, be used in any audio or radio frequency application where attenuated outputs from 1 volt down to a microvolt or less are required even at frequencies greater than 300 Mc/s.

The attenuator consists of an aluminium die casting which houses an unbalanced ladder network and a switching device for selecting any one of six positions. The switch blades and contacts are rhodium-plated in order to eliminate wear and contact troubles.

The various cavities in which are located the resistance network, switches, contacts etc., are so proportioned that optimum performance is obtained at high frequencies when the impedance of the ladder network is 75 ohms.

A four step 75 ohm network is normally fitted having each step adjusted to within 20 db plus/minus 0.2 db. High-stability carbon resistors are used since they are the only type available which are sufficiently nonreactive at high frequencies. Up to 100 Mc/s the accuracy of the attenuator is determined by the accuracy of the resistors. At 300 Mc/s. megacycles the attenuation per step is approximately 20.5 db's.

Specification

Impedance : 75 ohms.
Maximum Attenuation : 80 db.
Attenuation Per Section : 20 db.
Accuracy (at 80 db) *:* 0-100 Mc/s. ± 1 db. 100-300 Mc/s. ± 2 db.
Input Connexion : ⅜ B.S.F. externally threaded bush.
Output Connexion : Standard Pye sockets.
Weight : 9 ozs.

Advance Components Ltd., Back Road, Sherhall Street, Walthamstow, London, E.17.

High Accuracy Precision Potentiometers

(Illustrated below)

A RANGE of cam-corrected high accuracy potentiometers is displayed by Colvern Ltd.,

In the Colvern cam-corrected potentiometer a certain amount of angular motion is transmitted to the rotor contact, in addition to, and independent of, the main spindle, this motion being communicated to it by means of a lever which bears down on a track concentric with the resistance element. The profile of the track is controlled by screws arranged at regular intervals round its circumference and is adjusted so that inherent errors at any point in the winding are compensated for by the automatic retarding or advancing of the rotor contact.

A guaranteed linear accuracy of better than ± 0.1 per cent is maintained in all standard cam-corrected potentiometers, whilst in the Type CLR9101 6½ in. model the linearity tolerance can be held as low as 0.04 per cent and even lower, dependent on resistance value.

Specification

Rating : 10 watts.
Resistance Values Available : 1,000 to 150,000 ohms.
Overall Resistance Tolerance : ± 5 per cent.
Linear Accuracy : ± 0.04 per cent.
Maximum Working Voltage between Spindle and Track : 1,000 volts D.C.
Effective Angle of Resistance : 315° +0.25° -0°
Angle of Spindle Rotation : 360 .

Colvern Limited, Mawneys Road, Romford, Essex.

ELECTRONIC at the R.C.M.F.

THE sixth private Exhibition of the Radio Component Manufacturers Federation was held at Grosvenor House, London, from March 1st to March 3rd, 1949.

B.S.R. High Gain Valve Voltmeter Type V.M. 1000

THE V.M. 1000 is a voltage measuring instrument of exceptionally wide frequency range and high sensitivity.

A full scale sensitivity down to 10 mV permitting measurements down to 1 mV and a frequency range of 20 cycles to 200 Kc/s. is, in itself, a unique feature, but by the use of a skilfully designed cathode follower probe, an input impedance of 100 megohms with an effective input of only 7 pF has been achieved.

The V.M. 1000 will be found invaluable on Supersonic work. A companion instrument to this, is the R.C. Oscillator Type R.C. 200.

Specification

Valve Voltmeter Type V.M.1000
Voltage Range (full scale) *:* 1.0 mV to 30 volts in 8 ranges.
Frequency Range : 20 cycles to 200 Kc/s.
Meter (3 scales) *:* (1) Decibel scale minus 10 dB. to plus 10 dB. (OdB=1 volt). (2) A.C. volts 0-3. (3) A.C. volts 0-10.
Overall Accuracy : 5 per cent better down to approx. 1/6th f.s.d.
Operation : 200/250 volts, 50/60 cycles

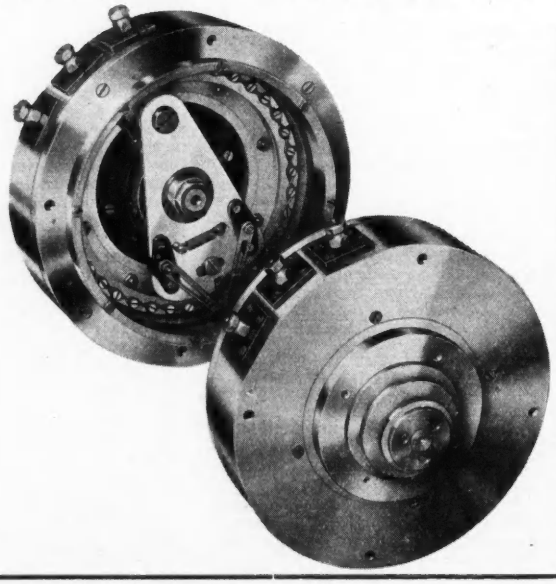

EQUIPMENT EXHIBITION

A selection of the newer and more important exhibits is given on these pages. Further information can be obtained from the firms concerned.

B.S.R. R.C. Oscillator Type R.C. 200

THIS instrument operates from a 6 volt battery source, with an H.T. vibrator unit. Three 2 volt non-spillable accumulators are combined in a portable case, forming a complete power unit. A mains unit is available as an alternative supply.

An internal 600 ohm load is provided which can be selected by a switch. This load is tapped at 0.6 ohms and brought to an output terminal on the front so that very low voltages are available for most exacting requirements, and is fitted with precision.

A nominal 1 volt output is available across 600 ohm output terminals, and a meter is built in which has the following scales : 0-1v., minus 1 dB.-0-plus 1 dB. LT.. and H.T. level indications.

Specification

R.C. Oscillator Type R.C. 200

Frequency Ranges :

(1) 20 c/s.- 200 c/s
(2) 200 c/s.-2000 c/s.
(3) 2000 c/s.- 20 Kc/s.
(4) 20 Kc/s.-200 Kc/s.

} plus minus 2 dB.

Output : Nominal 1 volt across 600 ohm unbalanced. Optional internal load with 0.6 ohm tap. Output meter scaled 1 volt and minus 1 dB./plus 1 dB., also with L.T. and H.T. levels.

Attenuators : 60 dB. in 1 dB. steps (or 120 dB. max. on 0.6 ohm tap).

Birmingham Sound Reproducers Limited, The Claremont Works, Old Hill, Staffs.

Ear Mounting Drilitic Capacitors

(Illustrated on right)

A NEW method of Ear-mounting is now introduced to obtain the maximum advantage of size reductions and to provide a more rapid efficient method of mounting and fixing capacitors.

With the use of direct Ear-mounting the actual diameter of the capacitor represents the maximum chassis space required, thus saving the space previously occupied by the usual fixing feet on the clamp bands.

No loose parts in the form of clamp bands, fixing screws and nuts or rivets are required; a slight twist of the mounting ears, when inserted through the chassis rigidly fixes the capacitor. They are available in a full range of the usual capacitance and voltage values in single, dual and triple capacitance forms.

For the time being, these capacitors are only available to manufacturers of radio and electronic equipment.

Dubilier Condenser Co. (1925), *Ltd., Ducon Works, Victoria Road, North Acton, London, W.3.*

Microphones for Hearing-aid Component

(Illustrated below)

TWO crystal microphones manufactured by Cosmocord Ltd., are claimed to be the smallest ever produced. A round type, the Acos MIC 15 has a case diameter of 0.8 in. (21 mm.) and square type, the Acos MIC 17 has a square case of 0.8 in. Both types are illustrated.

Another microphone, the Acos MIC 18 has been developed which has exactly the same response as the Company's standard hearing-aid microphone but is housed in a shallow case, a reduction in size without loss of performance which is a considerable improvement.

Other equipment exhibited included the Acos G.P.15 Microcell cartridge, which is the first British gramophone pick-up cartridge to play both the new microgroove records and standard 78 r.p.m. records.

Cosmocord Ltd. Enfield, Middlesex.

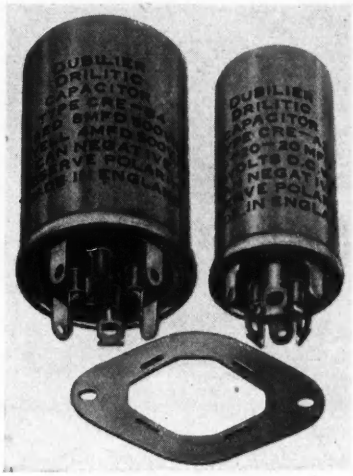

Miniature Metallised Paper Capacitors

(Illustrated below)

THE W99 capacitor has been developed to meet a demand for a small, inexpensive component for applications where the new range of miniature valves renders orthodox types difficult in assembly. They are particularly useful for decoupling at frequencies up to and exceeding 100 Mc/s., their effective inductance equalling that of a straight wire of equal length of $\frac{1}{4}$ in. dia. (approx.).

Dimensions : Length $\frac{7}{16}$ in. (11.11 mm.). Diameter $\frac{3}{16}$ in. (4.75 mm.).

Capacitance Range : 150 v. D.C. Wkg. 0.004 μF to 0.01 μF. 350 v. D.C. Wkg. 50 pF to 0,003 μF.

Capacitance Tolerance : Standard $\pm$ 20 per cent. Closer tolerances are available.

Capacitance Stability : Better than $\pm$ 2 per cent over temperature range.

Temperature Range : 150° C. to + 71° C.

Insulation Resistance : Better than 20,000 megohms. All capacitances.

A. H. Hunt Limited, Bendon Valley, Garratt Lane, Wandsworth, London, S.W.18.

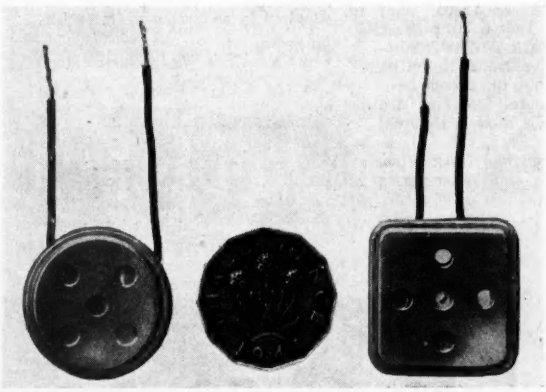

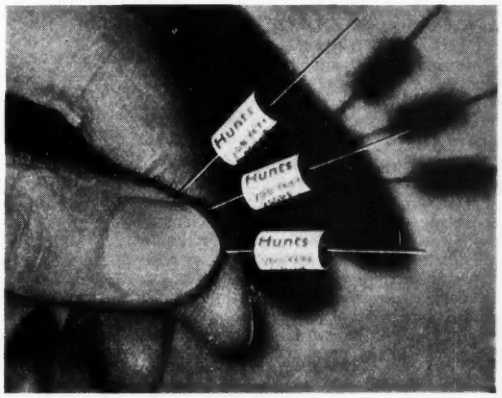

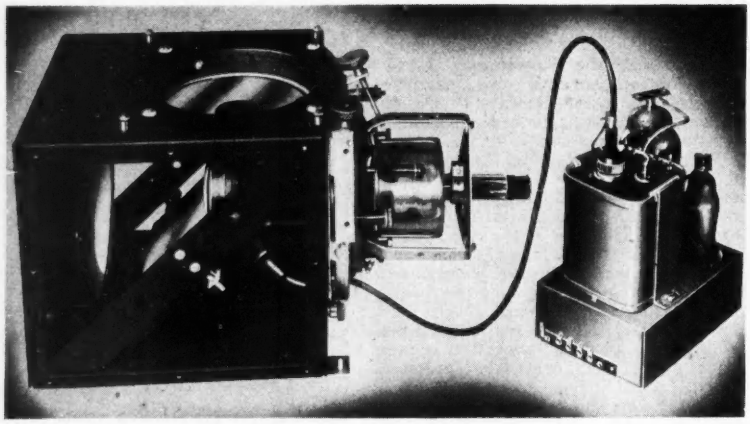

Temperature Compensation Capacitors

(Illustrated on right)

THESE capacitors are less than $\frac{3}{8}$ in. long by $\frac{1}{4}$ in. dia. and have been designed specially to offer a large change of capacitance with a relatively small initial capacitance. The tempeature coefficient is strongly negative (—3000 ± 10 per cent × 10—6/°C.) These capacitors are, therefore, suitable for compensation of positive coefficients of inductance in tuned circuits without greatly increasing the minimum of capacitance.

Miniature Pearl and Tubular Capacitors

These now cover all preferred values from 0.47 pF to 10,000 pF. Maximum diameter $\frac{1}{4}$ in., max. length $\frac{3}{8}$ in. In this range, full use has been made of the properties of the new material Unilator K.3000 which combines a high permittivity of 3000 with excellent insulation resistance and high breakdown strength. This range is suitable for coupling capacitors in television, F.M. and radar receivers, and for the I.F filter in normal broadcast receivers.

New Ceramic Transmitter Capacitors

Ceramic "Hi-Load" Capacitors have been extended to cover a variety of dielectric bodies and fittings. Their aerodynamic shape and excellent power factor of the special low loss ceramic bodies, have made it possible to pack heavy R.F. ratings into small dimensions. These new designs ensure greater efficiency in R.F. heaters and transmitters.

New Silvered Mica Twin Capacitors

These capacitors which form one of the end blades of an I.F. transformer assembly have proved extremely popular as their use (patent applied for) affords a considerable saving in the assembly costs. Formerly types were for $\frac{7}{8}$ in. and $1\frac{1}{8}$ in. square cans; the new type will meet requirements of users of 1 in. square cans.

United Insulator Company Limited, Oakcroft Road, Tolworth, Surbiton, Surrey.



R.F. Cables

(Illustrated below)

THE wide range of Telcon Radio Frequency and Television Cables were exhibited, together with examples of "GEE" (antimicrophonic) and "WYE" (double-screened) R. F. cables.

Of interest was a new low-loss cable of high uniformity, Telcon type A.S. 84. Al.H, which has been recently developed. It is intended primarily for use as a television antenna feeder. Several advanced features are included in the design in order to achieve the desired characteristics.

A solid copper wire is used as the inner conductor, the insulation is formed by a series of interlocking semi-cylindrical shells accurately moulded in Telcothene: the outer conductor is formed of a seamless extruded tube of high conductivity aluminium. The aluminium tube provides a highly efficient return conductor and serves as a watertight sheath to protect the semi air-spaced insulation. The robustness and light weight permits it to be installed on masts without the use of steel armour. The usual outer servings are applied when the cable is used in external installations.

The Telegraph Construction and Maintenance Co. Ltd., Telcon Works, Greenwich, London, S.E.10.

Projection Television Apparatus

(Illustrated on left)

NEW projection television components have been developed by Mullards and are available only to manufacturers of television equipment.

These components comprise an optical system complete with deflection and focusing coils and a compact EHT unit for the necessary 25 KV supply. These two units, in conjunction with the new Mullard $2\frac{1}{2}$ in. picture tube type MW6-2, enable manufacturers to produce an efficient large screen television receiver using as a basis the chassis of their existing direct viewing set.

Special Features

(1) Large picture 12 in. by 15 in. on a flat screen.
(2) Low tube replacement costs.
(3) Compact optical system is very efficient and makes use of a modified Schmidt principle.
(4) Screen size is suitable for home viewing or for viewing by small groups.
(5) Has high picture brightness and small spot size on the picture tube face.
(6) The system is more than adequate for 405 lines resolution with good contrast and brightness.
(7) Optical unit remains in adjustment with ordinary use.
(8) Mullard television components, together with Mullard picture tube and driver valves, are supplied as a system completely tested and ready for use.

Mullard Electronic Products Ltd., Century House, Shaftesbury Avenue, London, W.C.2.

A New Pre-set Mounting Bush

(Illustrated below)

A NEW Teledictor component is a mounting bush in a simple and convenient form for pre-set controls.

The single $\frac{3}{8}$ in. diameter hole fixing makes it possible to dispense with the present method of brackets with all the additional screws and nuts. It provides a positive location for the screw driver, when setting the control. It is suitable for use with all types of instrument panels or chassis up to a $\frac{3}{16}$ in. thickness, and is normally supplied in nickel plated brass but can also be supplied in an insulating material.

Teledictor Limited.
214, Birmingham Road, Dudley, Worcs.



Telcon R.F. Cable



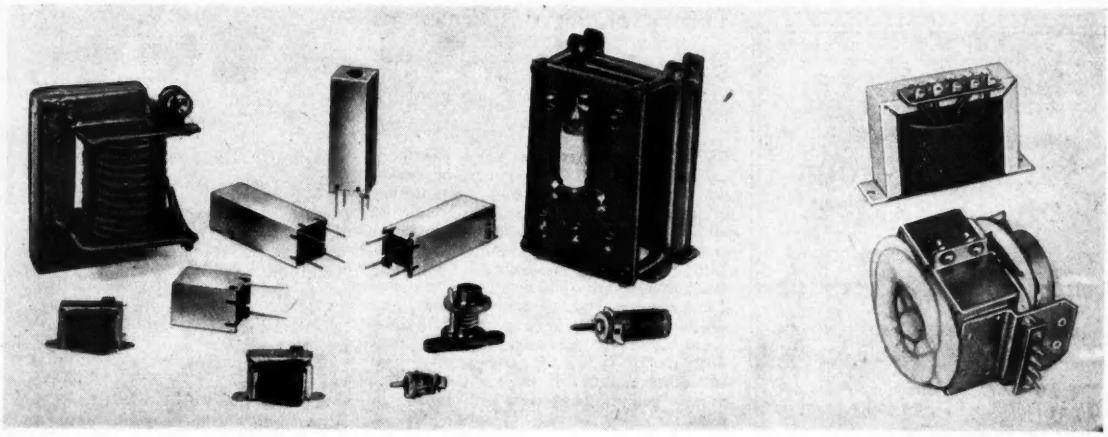

New Range of Plessey Television Components

(Illustrated above)

AS a result of extensive development in the television receiver field, The Plessey Company Limited, Ilford, Essex, has produced a complete range of new components incorporating the latest technical and economic advances. New circuit techniques have been evolved offering substantial simplification and economics. Versions are available for various valve combinations, provision being made for different circuit arrangements according to particular requirements.

Combined E.H.T. and Scan Unit

This is a new combined line scan and E.H.T. unit of high efficiency and economic construction. A new core material is incorporated which has been specially developed by the Company for the purpose, and which offers a number of advantages over contemporary methods. Available for operation from various types of valves e.g. EL 38. Pen 46 and 807, it is also suitable for use in the basic single valve self-oscillating circuit for either hard or soft valves.

Frame Deflection Arrangement

Two types of frame units are available for single valve or drive circuits, but these use different mechanical structures. The single valve construction consists of a yoke type transformer which acts simultaneously as oscillating transformer and deflector.

For driven frame circuits a conventional Output Transformer (T.1441) suitable for operation with valves of the 6L18, 6F13, EF types (triode connexion for maximum current economy) or in an alternative version T.1091 for higher current values, and operated in conventional circuit arrangement.

Scanning Coils

New deflector coil units of simplified design are also provided. The combined line and frame deflector unit is suitable for use in arrangements using a driven frame time-base with output transformers, T.1441 and T.1091 and with the combined E.H.T. and Scan Unit.

Focus Arrangements

Both electro-magnetic and permanent magnet focus units are available. The former is a light coil in three resistance values. This is available separately or on a three point fully adjustable mounting. The permanent magnet arrangement has a ring magnet mounted to give a narrow field gap and is also fully adjustable on a three point mounting. A special feature of this mounting is the facility for movement behind the mounting screen, allowing for easy adjustment when the complete receiver is in its cabinet.

Two magnets are available, flux values giving suitable fields for triode and tetrode C.R. tubes.

The Plessey Co. Ltd.
Ilford Essex.

Miniature Metalmites

(Illustrated below)

THESE are an extension of the standard Metalmite range of paper tubulars to cover requirements for deaf aid equipment, miniature receivers and transmitters. Their short length makes them very adaptable in small assemblies, whilst their excellent sealing maintains a high insulation resistance and high breakdown voltage under tropical conditions.

Some typical additions are :—
.0002 μF, 500 v D.C. working and .001 μF 350 v D.C. working, at 70° C. and 16 mm. long by 5 mm. diameter.

Telegraph Condenser Co. Ltd.
Wales Farm Road,
North Acton, London, W.3.

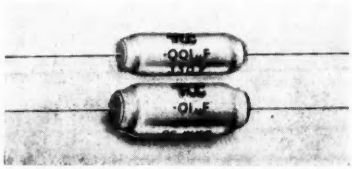

Tape Deck Recorder Unit

THE Wearite "Tape-Deck" is the first entirely British made recorder and is, it is claimed, a great step forward in bringing good quality recording within the reach of a wide variety of users.

The outstanding features are :—

(1) Motor-board includes the necessary driving motors, switches, constant speed capstan, brakes and link mechanism, twin-tape reels, heads for recording, erasing, playing back, footage indicator, control knobs and neon indicator.

(2) Controls are limited to stop and start switches, change-speed switch and switch for erasing, recording, winding and play-back.

(3) Speed of playing or recording can be varied at will ; speeds of 3¾ in. per second and 7½ in. per second are standard provisions.

(4) Standard ¼ in. wide tape is used and reels hold 1,250 feet. Playing time is accordingly 70 minutes at 3¾ in. or 35 minutes at 7½ in. per second.

(5) No "threading" of the tape is required. It is simply dropped into the "V"-slot on the right of the motor-board.

(6) The recording and play-back heads are so arranged that two tracks of recording can be stored on the standard tape thus effectively doubling the playing times mentioned in (4) above. Alternatively the two tracks can be recorded or played simultaneously for applications where this is required.

(7) The winding-back time is one minute.

(8) Erasing of the tape is performed at 45Kc/s prior to recording.

At present the "Tape-deck" recorder is available to manufacturers only who will fit the recorder into their own amplifying equipment.

Wright and Weaire Ltd.,
138, Sloane Street.
London, S.W.1,

48
Specialists
behind our
TECHNICAL BOOK ORGANISATION
ensure an incomparable service

We can supply most British and American Books by return of post

Send 6d. P.O. for our unique descriptive Catalogue "T" covering books on

TELECOMMUNICATIONS AND ELECTRONICS

Write, call or 'phone

'BOOKS & CAREERS'

(Dept. 25) 39, SOUTH AUDLEY STREET, LONDON, W.1. (GRO. 4781)

also at

84, Victoria Street, S.W.1. (VIC. 2738.)

NEW! First post-war edition **WIRELESS WORLD—RADIO VALVE DATA,** with characteristics of 1,600 valves. 30s. Postage 3d.

PULSES AND TRANSIENTS IN COMMUNICATION CIRCUITS, by C. Cherry. 32s. Postage 6d.

THE RADIO AMATEUR'S HANDBOOK, by A. R. R. L. 1949. 16s. 6d. Postage 9d.

VADE MECUM, 1948 edition, by P. H. Brans. 2 volumes. 19s. net. Postage 6d.

RADIO ENGINEERING, by F. E. Terman. 42s. Postage 9d.

PRINCIPLES OF SERVOMECHANISMS by S. G. Brown and D. P. Campbell. 30s. Postage 9d.

THE AMPLIFICATION AND DISTRIBUTION OF SOUND, by A. E. Greenlees. 16s. Postage 6d.

TELEVISION RECEIVING EQUIPMENT, by W. T. Cocking. 12s. 6d. Postage 5d.

NEWNES TELEVISION MANUAL, by F. J. Camm. 7s. 6d. Postage 6d.

VERY HIGH FREQUENCY TECHNIQUES, Vols 1 and 2, by Radio Research Laboratory. £4 4s. set. Postage 9d.

We have the finest stock of British and American radio books in the country. Complete list on application.

THE MODERN BOOK COMPANY

(Dept. E.4)

19–23, Praed Street, LONDON, W.2.

BOOK

Theory of Servo Mechanisms

By Hubert M. James, Nathaniel B. Nichols and Ralph S. Philips. 375 pp. M.I.T. Radiation Laboratory Series (McGraw-Hill). Price $5.00 net.

THIS book gives a very thorough treatment of the theory of servomechanisms, illustrated by a number of examples, the most important of which is an automatic tracking radar equipment developed during the war. The treatment is almost entirely mathematical based on the methods of Laplace and Fourier transformers, and unless the reader is familiar with these techniques he will find the book difficult to follow. The approach is from filter network theory with which most telephone engineers will be familiar but owing to the lack of simple approach to the theory of the simpler servo systems, those not already familiar with servomechanisms or filter network theory will be well advised to study some simpler approach such as is given in "Servomechanism Fundamentals" by Lauer, Lesnick and Matson, before attempting to use this book. When familiar with the underlying problems and the use of Laplace and Fourier transformers, the reader will find this book of great value and the conclusions reached are of the greatest importance in many applications.

The outstanding contribution is the method developed for determining the optimal values for the velocity-error constant and the time-constants of the various parts of the system to give a minimum value to the mean square error of the output under conditions of random noise appearing either at the input or within the servo loop. The solution will obviously depend on the type of servo system adopted, but the method is applicable in all cases, and so by it the different types can be compared, and taking into account the limits imposed on some of the parameters by design considerations the best system can be designed. This is of the utmost importance in those cases, like the example used, in which the "noise" in the system is of the same order as the accuracy required, but which is not the case in many industrial applications when a simpler approach can be used.

In the cases where the servo system has to work near the limit set by the inherent noise level the stability criterion becomes of importance since the system will also be operating near this limit. The Nyquist criterion is defined and treated in full and a new criterion is developed from the decibel-log-frequency diagram which is approximately in agreement with the usual design practice.

The derivation of weighting functions, transfer function, autocorrelation functions and power frequency spectra and their use is very fully described. This leads directly to the theoretical design of servo systems which is quite straightforward for the usual examples. There follows an excellent chapter on the design of systems when the input data is in the form of pulses instead of the more usual D.C. and A.C. forms. This leads on to the consideration of the effect of noise, as mentioned above, which must be analysed by the use of the autocorrelation function and power frequency spectra.

In the last chapter consideration is given to the effect of introducing a human operator at some point in the system and it is shown how allowance can be made for this somewhat uncertain element

Of necessity, a large number of symbols are used in the course of the book and it is difficult for the reader to carry their meaning to his mind. A list of symbols would therefore be of considerable assistance.

J. F. COALES

Loran (Long Range Navigation)

By Pierce, McKenzie and Woodward. 476 pp. (Vol. 4 of M.I.T. Radiation Laboratory Series. McGraw-Hill. Price 36s. net.)

THIS book is one of the series written at the end of the war, describing the work of the Radiation Laboratory. As such it contains a great deal of practical engineering information on the Loran system and some historical matter. As the name implies, Loran is a Long Range Navigation system which was used extensively by the Allied Naval and Air Forces. The introduction of such a system based upon, at the time, unfamiliar principles, involved not only a study of many branches of radio engineering, but also much investigation into methods of mapping and charting, together with calculations of coverage areas and errors arising from various configurations of ground stations.

The book is divided into two parts, each of which contains a number of sections written by different authors, each an expert on the subject matter of the section concerned. The sections cover the following aspects: history of the system, principles, future trends, propagation, methods of computation and charting, and equipment design.

In the introduction a review is made of alternative methods of radio position fixing and the logical background for the development of Loran is given. The historical section covers

REVIEWS

the early development of ideas, and outlines the rapid development of the system with all its ramifications, until November, 1945, when the night-time service area was about 70 million square miles. Future trends are discussed briefly in a somewhat optimistic manner, and it is probably true to say that none of the schemes described has passed beyond the theoretical stage. In particular, the more refined forms of equipment such as automatic dial reading navigators' sets and automatic plotters have not so far made an appearance.

When Loran development was started, its precise performance could not be predicted, particularly in regard to night-time accuracy, owing to inadequate knowledge of propagation, and a great deal of research was therefore conducted. This is adequately described in the section on Propagation by J. A. Pierce, for both standard Loran on 2.0 Mc/s and for L.F. Loran on 180 Kc/s. Although this work was carried out in such a way as to yield information in a form directly applicable to the Loran system, much of it is of general interest and application.

The section on computation of charts and tables is of general application to other hyperbolic systems, such as Gee and Decca. Several alternative methods of computation are given, including the accurate methods employed for permanent chains and the more approximate ones intended for use by armies in the field.

Part II of the volume is devoted entirely to description of equipments and accounts for about half of the total subject matter. All items of equipment used, ground transmitters and receivers, antenna systems, airborne and naval equipments, are represented here by description of at least one model. The descriptions cover circuit design adequately, although no attempt is made to describe in detail the action of items such as multivibrators, blocking oscillators, etc. As the editors point out, these are adequately covered in other volumes of the series and elsewhere. Nevertheless, an interesting section on antenna design is included, and the difficulties of obtaining an efficient antenna with adequate bandwidths for pulse transmission on 180 Kc/s, together with proposed solutions, are described at some length.

To summarise, this is an interesting book, well produced, but by its nature very practical in regard to its subject matter and of interest to a rather restricted number of readers.

H. R. JOHNSON.

Ultra-High Frequency Transmission and Radiation

By Nathan Marchand. ix and 322 pp. New York: John Wiley & Sons, Inc.; London: Chapman & Hall, Ltd. Published 1947, price 27s. net.

THIS book is an elementary introduction to the transmission and radiation of electromagnetic energy. The emphasis of the treatment throughout is analytical; the basic equations are developed in full detail for the fundamental physical elements involved; practical applications of the results are discussed, and in some places, a brief indication is given of the extention of the principles to cover more complex systems.

A chapter on transmission line theory forms the opening. The general equations and their solution are derived, but only the lossless line is treated in detail. The use of resonant lines for impedance measurements is discussed, and the use of circle diagrams is explained (but not derived). Stub matching is also covered. Chapter 3 is devoted to the derivation and discussion of Maxwell's Electromagnetic Equations and their boundary conditions. This is preceded by a very sketchy introduction to Vector Analysis, which appears unsatisfactory to the reviewer. If the student is familiar with the subject, there is no need for the space given to it here; if he is not, he will need a much more detailed and gradual approach. Chapter 4 introduces the concept of electromagnetic waves, and treats the plane wave solution of Maxwell's equations in detail. Poynting's vector is introduced; reflexion and refraction are treated for simple cases. An excellent chapter on radiation follows. It begins with a discussion of the polarised spherical wave, then demonstrates that an oscillating doublet can generate such a wave, extends the treatment to a dipole of finite length, and sorts out the induction field and the radiation field and their respective ranges of influence. Radiation patterns and radiation resistances are evaluated based on sinusoidal current distributions. In the next chapter, an elementary discussion of aerial arrays and their radiation patterns is carried out, including the effect of a reflecting ground plane. Rectangular and circular wave guides are treated next along conventional lines with the aid of Maxwell's equations. A short but very useful chapter on more complex line problems, such as the effect of breaks in a screen, and balanced-to-unbalanced line transformers, concludes the book.

Taken as a whole, the book provides a readable and clearly presented introduction to the subject, and can be recommended to the engineer for the revision of the fundamentals, as well as to the student.

P. E. TRIER

H. K. LEWIS & Co. Ltd.

LENDING LIBRARY

Scientific and Technical
Annual Subscription from
ONE GUINEA

Prospectus post free on request

New Scientific and Technical Books and new editions are always available

Bi-monthly list of new books and new editions sent post free to subscribers on request.

THE LIBRARY CATALOGUE
Revised to December, 1943
containing Classified Index of Authors and Subjects. Demy 8vo pp. viii+928
To Subscribers - - 12s. 6d. net
To Non-subscribers - - 25s. net
(Postage 9d.)
Supplement, 1944 to December, 1946
To Subscribers - - 2s. 6d. net
To Non-subscribers - - 5s. net
(Postage 4d.)

LONDON: H. K. LEWIS & Co. Ltd.
136 GOWER STREET, W.C.1
Telephone: EUSton 4282

NEW BOOKS

PULSES AND TRANSIENTS IN COMMUNICATION CIRCUITS

An Introduction to Network Transient Analysis for Television and Radio Engineers

by COLIN CHERRY, M.Sc.(Eng), A.M.I.E.E.

Demy 8vo. 317 pages 129 figures 32s. net

ATOMIC ENERGY

by K. K. DARROW, Ph.D.

Demy 8vo. 80 pages 13 figures 12s. net

The exciting story of the development of nuclear physics — a story climaxed by the reality of atomic energy and the atomic bomb

CHAPMAN & HALL, LTD.
37-39, Essex Street, London, W.C.2

BOOK REVIEWS *(continued)*

Elementary Industrial Electronics.

William R. Wellman. 362 pp. 250 figs. (D. van Nostrand.) Price, 22s. net.

THE scope of the book is clearly stated in its title. It is written by an experienced teacher who is an expert in both electronic engineering and pedagogics.

The interesting features of the book are:—

(1) A very thorough, though brief, description of the basic principles, well illustrated by a series of line drawings.

(2) To deepen the understanding of the subject matter, the four experiments which are to be found at the end of each chapter, have been designed to assist the student in digesting the text of the particular chapter. Full directions are given and experimental alterations suggested.

(3) Illustrations with line blocks are well made and are convincing through the clear conception and expression of the "things that matter." Unfortunately, the same cannot be said of the half-tones which are sometimes blurred, sometimes smudged and, with a few exceptions, are not instructive at all.

In some photographic reproductions the electronic gear cannot be seen for all the black background which, one finds out, is the machine for which the electronic equipment in question has been designed.

(4) The author has done very well indeed in including not only the usual list of well-known textbooks and references, but also some of the best technical trade literature (bulletins, catalogues, etc.). Other authors should make a point of perusing—and recommending—the trade literature which, when carefully selected, is an essential adjunct to the student's as well as the engineer's quick-reference-library. A lot of practical information is conveyed in conscientiously written trade literature which will not be found in any textbook and, yet, is an essential part of the expert's knowledge.

(5) A summary at the end of each chapter will make it easy for the student to recapitulate each text, or to brush-up his knowledge.

The few remarks that follow are in no way meant to detract the reader's attention from the merits of the book as a whole.

p. 20 "capacity reactance" should read "capacitive reactance."

p. 21 "capacity" should read "capacitance."

p. 33. When the author says "one or two billion cycles" he means 1.10^9 or 2.10^9 c/s. It must be remembered, when studying books of American vintage, that over there a billion is 10^9, while in most parts of Europe it is 10^{12}. The same applies to a remark on p. 12 where one billion cycles is 1,000 Mc. It would be very much appreciated by the readers in all parts of the globe if such ambiguity could be avoided by simply using non-ambiguous terms as, for instance, 1,000 Mc. or 10^9 c/s.

An obvious omission might be pointed out in Fig. 2-18 where the anode lead has been forgotten.

W. SUMMER.

Frequency Analysis, Modulation and Noise

By Stanford Goldman (McGraw-Hill, 1948). 434 pp. Price 36s. net.

AT first sight the three subjects enumerated in the title of this book appear to constitute a mixed bag. Reflexion shows that they have much in common; and although the author has been at some pains to make the various parts of the text independent, the whole hangs together uncommonly well.

The book sets out to clarify certain fields of radio. Consequently the mathematics, applied throughout with great vigour, is treated no more rigorously than need be for the purpose of imparting a thorough understanding to radio engineers.

The first four chapters deal with the theory and applications of analysis by Fourier series and integrals. Amplitude, phase and frequency modulation is discussed in a sixty-page chapter. The remaining two hundred pages of the text proper are devoted to an exhaustive and penetrating analysis of noise (in the radio sense).

Six short appendices are particularly valuable, having regard to the mathematical flavour of the text. First there is a list of the principal symbols and abbreviations, with notes of the pages where they are defined or first used. Then follow tables of integrals, both definite and indefinite, and of trigonometric indentities; these, which could have been strung together so badly, have been compiled with care and evidently from experience as to what is useful in work of this kind. A few examples of Fourier pairs are given in a sample table. The last two appendices contain some miscellaneous information on Bessel functions and values of the function of the first kind, for various integral orders and arguments.

A companion volume concerned with transient analysis and Laplace transforms is in preparation; it is sure to be awaited eagerly by all—and there will be many—who find the volume under notice admirable.

R. G. MANLEY

Report on Progress in Physics Vol. XI (1946-47)

The Physical Society (1948). Price, £2 non-Fellows; £1 5s. Fellows.

THE eighteen reports in this volume are regarded as covering a period of two years; six of the reports deal with meteors, comets and meteoric ionisation, while the remainder are devoted to a variety of physical subjects, including what is virtually a monograph, on Ferromagnetism, by Prof. E. C. Stoner. It is probably unnecessary to state that the reports attain a very high standard indeed; of those which are of particular interest to electronic physicists may be mentioned, "Developments in the Infra-Red region of the Spectrum" by G. B. B. Sutherland and E. Lee, and a lengthy paper on "The Mechanism of Thermionic Emission for oxide coated Cathodes" by H. Friedenstein, S. I. Martin and G. L. Munday. These paper have extensive bibliographies, which makes them of additional value.

There are two reports on "The radio-frequency Spectroscopy of Gases" and "Ultrasonics research and the properties of matter," and the atomic physicists are catered for by several papers. In general these are by specialists, for specialists, or physicists at an advanced level, who will find the reports of inestimable value.

S. RODDA

Electronic Engineering

By E. Molloy (Geo. Newnes Ltd. 5s. 0d.) 106 pp. + figs. in text.

THE title of this book invites the obvious disclaimer that it has no connexion with this journal. It is a collection of short articles on various electronic devices by specialist authors, and by the use of extra small type it has been possible to compress a considerable amount of information into a short book. The subjects dealt with are: C.R. tubes and their applications, the Cyclotron and Betatron, Thyratrons, Photo-cells, and X-rays.

The subject of electronics is now so wide that it is practically impossible for one author to cover it adequately, and the assembly of individual contributions is a more satisfactory way of ensuring that accurate and up-to-date information is available in a convenient form. Such a symposium, however, imposes a task on the editor to maintain balance and, as far as possible, uniformity of style. Mr. Molloy has proved fully equal to the task, and it is only a pity that his efforts were not expended on a book of more dignified appearance.

G. PARR

When Buying Resistors

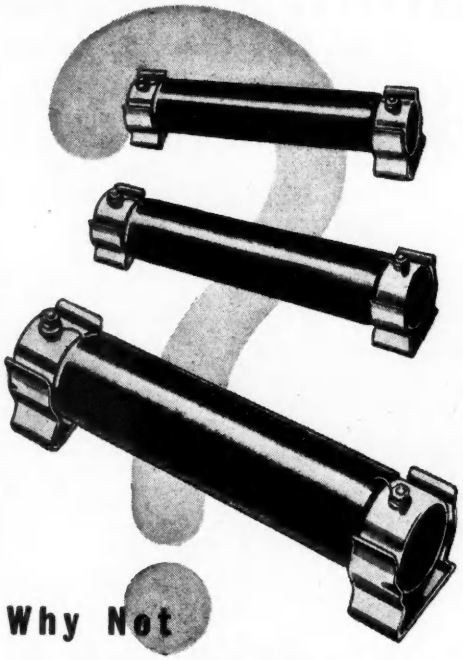

Why Not

CHOOSE THE CHEAPEST?

After all, most resistors look alike and if you buy enough you should save quite a lot. Theoretically this sounds sensible but, in practice, a premature break-down of equipment can cost more to rectify than will ever be saved by buying the cheapest resistor, and the loss of goodwill may be priceless. True, the manufacturer can change his supplier but only too often he cannot repair the damage to his own good name.

In the long run it is far cheaper to specify

BERCO

RESISTORS

THE BRITISH ELECTRIC RESISTANCE CO. LTD.
QUEENSWAY, PONDERS END, MIDDLESEX
Telephone : Howard 1492 Telegrams : Vitrohm, Enfield.

BR2083-TV1

A poor life this
if full of care,
You end with voltage
through your hair,

No time to sing
and dance and play,
Because your volts
aren't under way.

No time to step out
just because,
Your step-up system's
full of flaws.

No time because
tests have revealed,
That your Transformers
are not sealed.

'Gainst moisture - cold -
vibration - dust -
Heat - humidity and rust,
Fumes and fungus, sudden shocks,
Altitude and hearty knocks.

No time to seal
hermetically,
As Mercury
emphatically.

If you've no time
to take this care,
You'll end with voltage
through your hair.

With apologies to the immortal Tramp Poet, W. H. Davies.

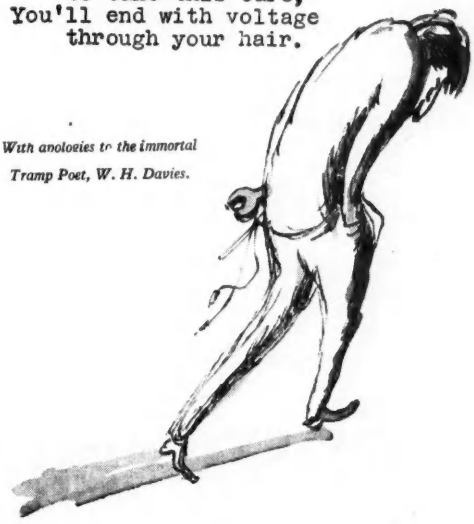

PARMEKO of LEICESTER

Makers of Transformers for Electronic and Electrical Industries

Mechanical strength and adequate colour coding are two very obvious advantages afforded by the DELAFLEX range of sleevings. Equally important is their De La Rue reliability. A range of single and multiple colours codifies the most intricate circuits. Available in Varnished Cotton, Varnished Art. Silk (Rayon) and Rolled Silk. Optional Metal Screening. Diameters from 0.5 mm. Samples and full details supplied gladly on request.

DELAFLEX insulated sleevings

DE LA RUE INSULATION LIMITED
IMPERIAL HOUSE, 84/86 REGENT ST., LONDON, W.1
TELEPHONE: REGENT 2901
TELEGRAMS: DELINSUL, PICCY, LONDON

D.A.30

ARMSTRONG

Makers of fine Radio Chassis for 16 years

Model R.F.103 (type 2), 10 VALVE ALL-WAVE Radio Chassis, incorporating R.F. pre-amplifier, waveband expansion, 2 stages of I.F. amplification with variable selectivity, cathode ray tuning indicator and 10 watts push-pull output.



CIRCUIT

The new R.F.103 chassis largely removes the difficulty of separating stations after dark as the two stages of I.F. amplification with variable selectivity permit of a maximum selectivity better than 6 Kc/s. On the short wavebands the actual sensitivity is 8 micro volts. It will be appreciated that this chassis has a performance of an extremely high order, and coupled with the 10 watt output makes one of the most desirable musical instruments offered to the public. For 200-250 V. A.C. mains.

Price **19 Gns.,** *plus tax.*

Model Exp 125, 14 VALVE ALL-WAVE Radio Chassis incorporates every worthwhile refinement, including continuous waveband coverage from 11.9 to 550 metres, plus the long wave on the Home model; waveband expansion (the effective scale length is 5 feet); efficient R.F. pre-amplifier stage ; two stages of I.F. amplification, variable selectivity in both stages; three stages of delayed A.G.C. ; four switched positions of bass lift and four of treble lift; four beam tetrodes in parallel-push-pull incorporating negative feed-back used in the output stage to give 15 watts high quality output.

CIRCUIT

Aerial coupled to R.F. pentode acting as pre-amplifier feeding a triode hexode frequency changer; iron-cored I.F. transformer (465 Kc/s.) coupled to R.F. pentode again coupled by iron-cored I.F. transformer to variable-mu pentode (these transformers employ three switched positions of variable selectivity). The resulting signal is supplied to one diode of a double diode triode, the second diode acting as A.G.C. rectifier and the triode as the first L.F. amplifier. Between this DDT and the following triode valve is the tone compensating circuit. The output from the second L.F. triode is fed into a further triode acting as a phase changer, which is coupled to four tetrodes in parallel-push-pull to give 15 watts audio. A cathode ray tuning indicator is fitted. *Price* **32 Gns.,** *plus tax*

Kindly write for illustrated Catalogue **Demonstrations at our Showrooms**

ARMSTRONG WIRELESS & TELEVISION CO. LTD. WARLTERS ROAD, HOLLOWAY, LONDON, N.7

'Phone : NORth 3213

OAK
TYPE
SWITCHES by AB

PATENT NOS.
47891 and 47892

For Unlimited Switching Combinations

Compact single- or multi-bank switches with an infinite range of switching combinations. Silver-plated DOUBLE contacts and floating rotor are a special feature, ensuring utter reliability.

LET US SEND YOU OUR CATALOGUE

Our fully illustrated catalogue is yours for the asking, the full A. B. range including—Toggle, Rotary, Push-button and Push-pull Switches is fully illustrated and described.

SWITCH MAKERS WITH A LONG RECORD OF VERSATILE SERVICE TO THE ELECTRICAL AND RADIO INDUSTRIES

AB Metal Products Ltd., Great South-West Road, Feltham, Middlesex
Hounslow 6256 Feltham 2865

LONDON OFFICE: Ludgate House, 107, Fleet Street, E.C.4.
Telephone: CENtral 5667-8

ULTRASONICS

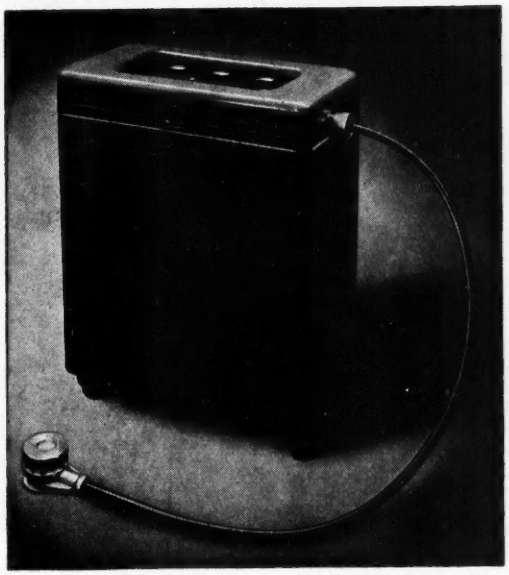

Mullard Ultrasonic Generator Type E.7562

Here is another example of how Mullard Research is helping forward Industry. The Mullard Laboratory Ultrasonic Generator is the first commercial generator to be produced in this country. It has been designed to fulfil the need for an experimental unit of wide flexibility.

These features are unique :

- **Power output into a water load of 500 watts at 2 Mc/s.**
- **Transducer head designed for operation in conductive or non-conductive liquids.**
- **Wide range of generator frequencies.**
- **Styled to match modern laboratory surroundings.**

Mullard
Electronic Products Ltd.
Electronic Equipment Division

ABOYNE WORKS, ABOYNE ROAD, LONDON, S.W.17

(MI.283)

ALL-POWER

CONSTANT VOLTAGE POWER SUPPLIES

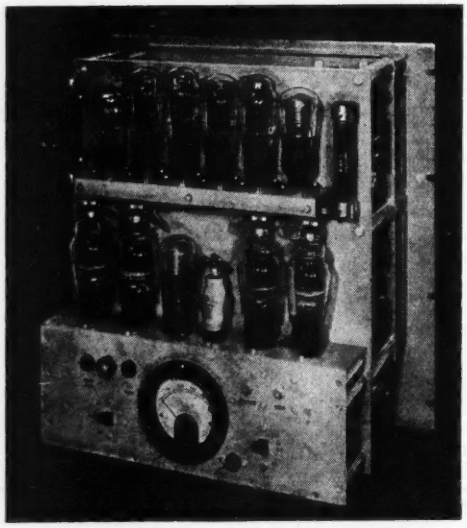

SPECIAL LABORATORY UNITS

This forward mounting Rack Unit, illustrated with cover removed, provides a constant output voltage of 300 D.C. at any current up to 600 mA. The output impedance is a fraction of an Ohm, and the residual output ripple is less than 2 mV.

This is only one of the many special Power Supply Units we are making to customers' requirements.

ALL-POWER TRANSFORMERS LTD.
8a, Gladstone Road, Wimbledon, S.W.19
Tel. : LIBerty 3303

MINIRACK

COMPLETE CATHODE-RAY OSCILLOGRAPH EQUIPMENTS

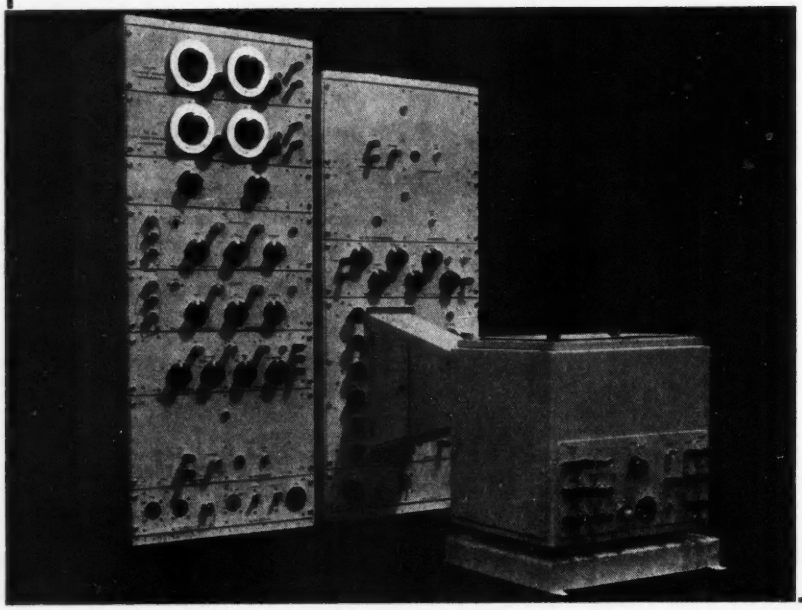

- Single and Multi-channel
- F.M. Amplifiers
- A.C. and D.C. Amplifiers
- Time-Bases
- Time-Markers
- Recording Cameras
- Pressure and Vibration pick-ups

We make a wide range of standard equipments to suit all purposes.
PLEASE WRITE FOR DETAILS

Special equipments made to meet users' requirements

SOUTHERN INSTRUMENTS
LIMITED
FERNHILL, HAWLEY
CAMBERLEY, SURREY
'Phone: Camberley 1741

Vortexion SUPER FIFTY WATT

This AMPLIFIER has a response of 30 c/s. to 25,000 c/s within ½db, under 2 per cent distortion at 40 watts and 1 per cent at 15 watts, including noise and distortion of pre-amplifier and microphone transformer. Electronic mixing for microphone and gramophone of either high or low impedance with top and bass controls. Output for 15/250 ohms with generous voice coil feedback to minimise speaker distortion. New style easy access steel case gives recessed controls, making transport safe and easy. Exceedingly well ventilated for long life. Amplifier complete in steel case, with built-in 15 ohm mu-metal shielded microphone transformer, tropical finish. *As illustrated*, Price **36½ Gns.**

10-Watt RECORD REPRODUCER with MICROPHONE STAGE, in case *PRICE* **25½ Gns.**

30-Watt RECORD REPRODUCER in metal case *PRICE* **£28.0.0**

CP20A AMPLIFIER for A.C. Mains and 12-volt Battery *PRICE* **£28.0.0**

All types of MICROPHONES, STANDS and SPEAKERS available from stock

VORTEXION LIMITED, 257-261 THE BROADWAY, WIMBLEDON, LONDON, S.W.19
Telephones: LIB 2814 and 6242-3 **Telegrams: "Vortexion, Wimble, London"**

AN ANNOUNCEMENT OF EXCEPTIONAL INTEREST....

The FOX HELICAL POTENTIOMETER type PXF 5/H 10 is now available for general release to the Electronic Industry

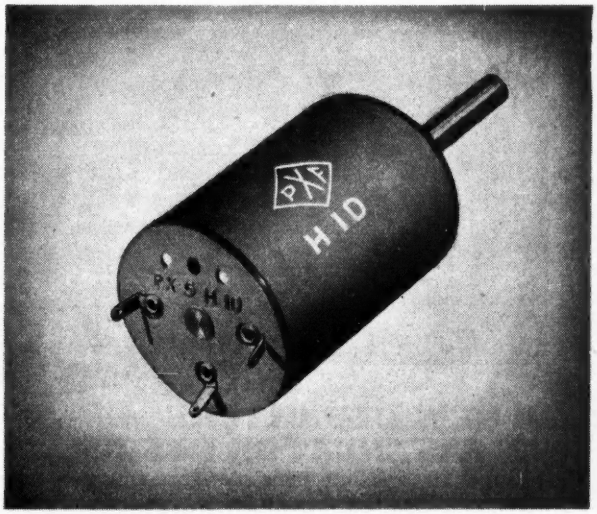

BRIEF SPECIFICATION

Resistance range, 20 ohms to 50 K. ohms.
Helical turns 10.
Rotation, 3,600°.
Number of wire turns, 2,000 to 12,000.
Wattage, 5.

Write for full details to :—

P. X. FOX LIMITED
TOROIDAL POTENTIOMETER SPECIALISTS
HORSFORTH, YORKSHIRE, ENGLAND.
Telephone : Horsforth 2831/2. - *Telegrams* : "Toroidal, Leeds."

a.d.h.

Twin-cone assembly brings *new realism* to sound reproduction

GOODMAN'S 'AXIOM TWELVE' IS A HIGH FIDELITY LOUDSPEAKER that brings within reach of all the means of achieving a degree of fidelity usually obtained only from the most expensive and elaborate equipment. From the rich pulsation of the organ's pedal register to the delicate whisper of the E-string of the violin, the the whole complement of the orchestra is strikingly recreated, and all the varied inflections of the human voice are so naturally rendered that this may truly be called "Living Reproduction." Send for fully descriptive leaflet A49

The "Axiom Twelve" is only suitable for use with equipment specifically designed for High Fidelity Reproduction.

For use with the 'Axiom Twelve' Goodmans High Fidelity Output Transformer Type H.4 is recommended. Supplied wound to individual specification.

A TRADITION OF EXCELLENCE FIDELITY EFFICIENCY

GOODMANS

AXIOM-TWELVE
12" P.M. LOUDSPEAKER

Fully Dustproof

GOODMANS INDUSTRIES, LTD., LANCELOT ROAD, WEMBLEY, MIDDX. *'Phone: WEMbley, 1200. Cables: "Goodaxiom, Wembley."*

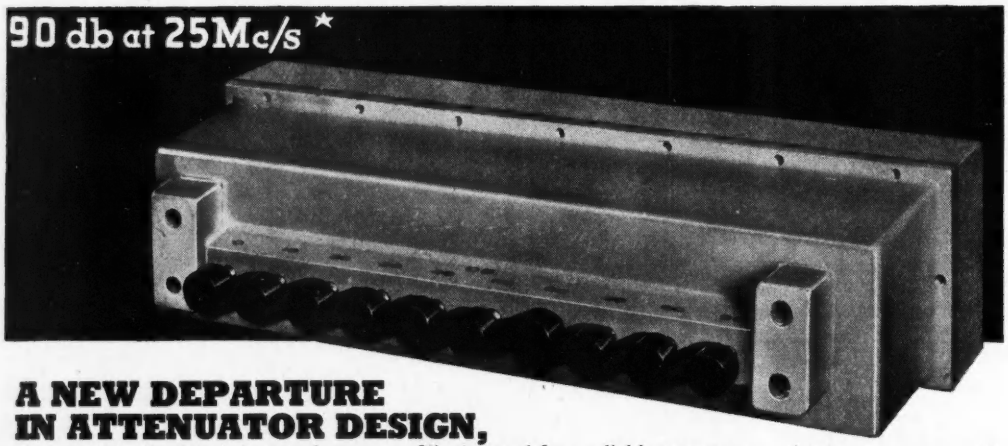

A NEW DEPARTURE IN ATTENUATOR DESIGN,

the new *Standard* Push-Button Attenuator fills the need for a reliable attenuator unit for building into test sets of all descriptions for high frequency measurements. Units providing 90 db in 10 db steps and 9 db in 1 db steps are available. 75 ohm impedance.

★When means are available for reliable checks on the accuracy at higher frequencies, we expect to give performance figures for an extended frequency range.

Frequency Error up to 25 Mc/s ±0.2 db
(up to 50 db attenuation)

Standard Telephones and Cables Limited TRANSMISSION DIVISION

Registered Office: Connaught House, Aldwych, London, W.C.2

NORTH WOOLWICH LONDON E.16 *Telephone:* ALBERT DOCK 1401

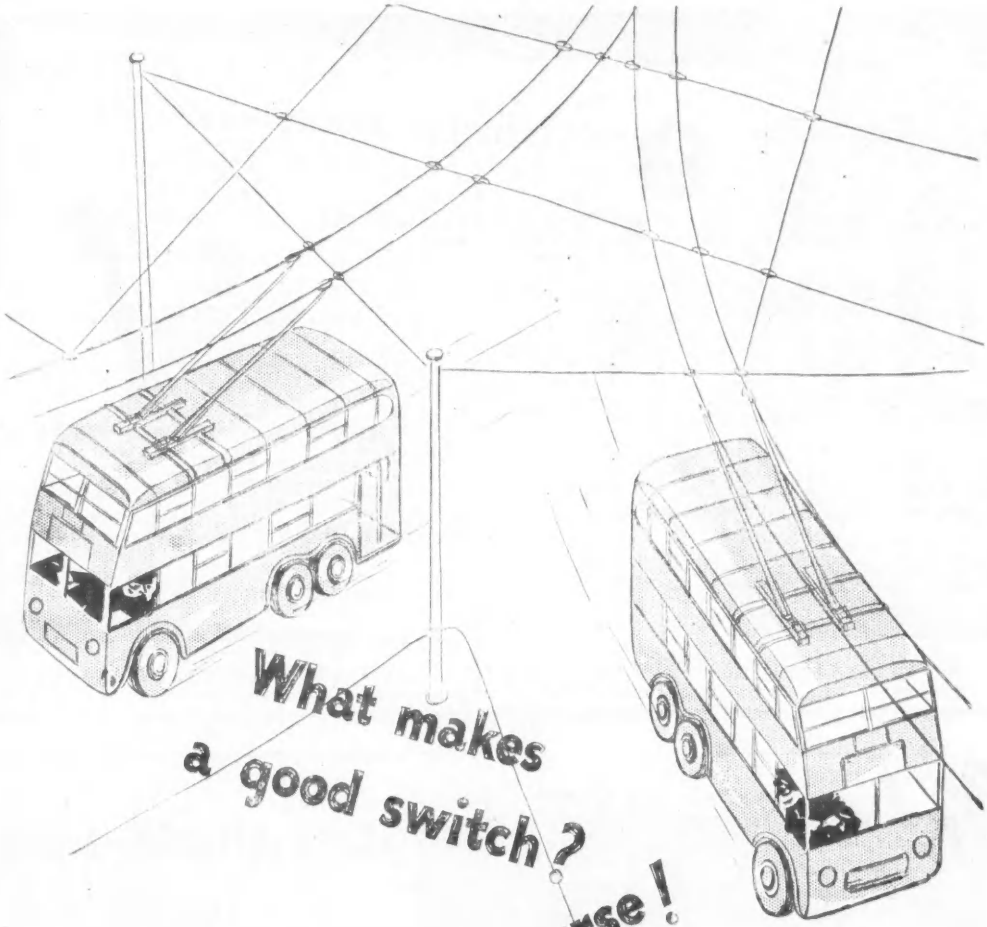

Walter Instruments
LIMITED

GARTH ROAD · LOWER MORDEN · SURREY · TELEPHONE: DERWENT 4421-2-3

DESIGNERS AND MAKERS OF SWITCHES AND CAPACITORS

CRC 42

NEW DESIGNS
in the range of
U.I.C
High Stability
CAPACITORS

2 U.I.C. SILVERED MICA TWIN CAPACITORS

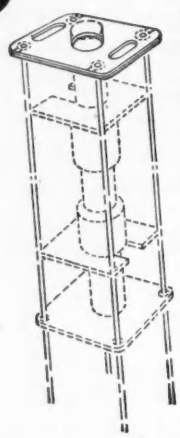

Type SMS. 102 suitable for miniature I.F. transformers ¾" square.

Type SMS. 202 suitable for standard I.F. transformers 1¼" square.



This new type Capacitor has been specially developed for use as an end plate or base on I.F. transformers. It forms an integral part of the transformer structure and is connected to the coils during mounting, thereby saving space, materials and the cost of installing two separate capacitors. It also reduces damping arising from eddy current losses induced in the silver layer, inevitable with normal constructions. Modifications to suit individual requirements can be supplied.

UNITED INSULATOR CO. LTD. OAKCROFT RD. TOLWORTH SURBITON SURREY
Telephone: Elmbridge 5241 (6 lines) Telegrams: Calanel, Surbiton

Only with CO-AX R.F. CABLES
AIR-SPACED ARTICULATED

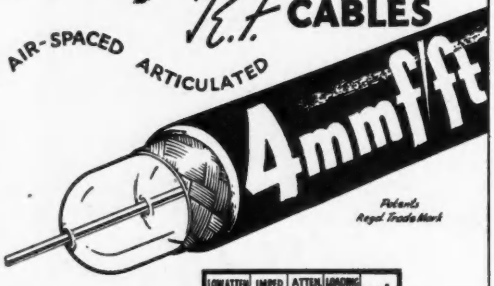

THE LOWEST EVER CAPACITANCE OR ATTENUATION

IMMEDIATE DELIVERIES FOR HOME & EXPORT

Write or cable for data sheets or deliveries to the Originators of Flexible air spaced R.F. Cables

TRANSRADIO LTD.
CONTRACTORS TO H.M. GOVERNMENT
138A CROMWELL ROAD LONDON SW7
TRANSRAD LONDON

LOW ATTEN TYPES.	IMPED OHMS	ATTEN. db/100ft at 100 mc/s.	LOADING Mc/s	O.D."	
A 1	74	1.7	0.11	0.36	
A 2	74	1.3	0.24	0.44	HIGH POWER FLEXIBLE
A34	73	0.6	1.5	0.88	
LOW CAPAC TYPES.	**CAPAC. mmf/ft**	**IMPED OHMS**	**ATTEN. db/100ft at 100 mc/s.**	**O.D."**	
C 1	7.3	150	2.5	0.36	
P.C.1	10.2	132	3.1	0.36	PHOTOCELL CABLE
C H	6.3	173	3.2	0.36	
C 2	6.3	171	2.15	0.44	
C22	5.5	184	2.8	0.44	
C 3	5.4	197	1.9	0.64	
C33	4.8	220	2.4	0.64	VERY LOW CAPACITANCE
C44	4.1	252	2.1	1.03	

JOSEPH ENOCK LTD.

Manufacturers and suppliers of the Enock Diamond Pick-Up, the Enock Amplifier and the Mordaunt Loud Speaker, all built to the exacting specification which has made the Enock Instrument the finest music reproducer in the world.

JOSEPH ENOCK LTD., 273a HIGH STREET, BRENTFORD, ENGLAND.

EALing 8103

LAMINATIONS

FOR

ALL RADIO AND ELECTRICAL USES.

IN SILICON, DYNAMO, INTERMEDIATE AND TRANSFORMER QUALITIES.

PERMALLOY, MUMETAL, RADIOMETAL.

SCREENS FOR ALL ELECTRICAL USES.

TRANSFORMER SHROUDS FOR 35 AND 74 LAMS.

GENERAL PRECISION ENGINEERS.

SHERADISING TO THE TRADE.

ELECTRICAL SOUND & TELEVISION PATENTS LTD.
12 PEMBROKE STREET, LONDON, N.1. — TERminus 4355
2/4 MANOR WAY, BOREHAM WOOD, HERTS—ELStree 2138

RELIABILITY

of H.T. and E.H.T. supplies to electronic and television equipment.

FIT AND FORGET

WESTINGHOUSE
WESTALITE
METAL RECTIFIERS

They ensure a steady, constant, and unfailing supply.

Write for descriptive literature and prices to **DEPT. E.E.4**

WESTINGHOUSE BRAKE & SIGNAL Co. Ltd.
82 YORK WAY, KING'S CROSS, LONDON, N.1

The World's Best



COMMUNICATIONS
Redifon
Radio

Radio Communications Division

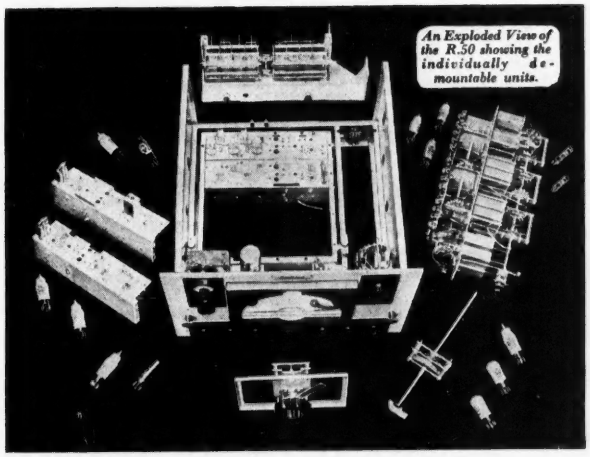

Expertly planned and superbly executed, this all-purpose communications receiver is yet another triumph for Redifon research and development. No other receiver in the world can equal its amazing range and performance. Those services demanding the very best in radio equipment will readily admit that the higher cost of the R.50 is more than justified by its amazing performance and reliability.
Five degrees of selectivity, including a crystal gate and crystal filter, are provided and the sensitivity is such that an input of between 1·5 microvolts gives a signal/noise ratio of at least 10 dB over the entire frequency range of 13.5 to 26 kc/s and 95 kc/s to 32 Mc/s. Separate power units for A.C. or D.C. operation are available.

REDIFFUSION LIMITED, BROOMHILL ROAD, WANDSWORTH, S.W.18
DESIGNERS & MANUFACTURERS OF RADIO COMMUNICATION & INDUSTRIAL ELECTRONIC EQUIPMENT Phone: PUTney 5691
RC 102

Dainite
MOULDED RUBBER PARTS
Enquiries are invited from the Engineering, Electrical and Motor Industries for Special Moulded Parts in Natural and Synthetic Compounds.

The Harboro' Rubber Co. Ltd. Market Harborough

RELAYS
AND
SWITCH KEYS
LARGE EX-GOVT. STOCKS
IMMEDIATE DELIVERY

Types 600 - 3000 Relays – Also High Speed

Large quantities of Telephone Components, Carbon Insets, Balanced Armature Insets, Plugs, Jacks, Condensers, Co-Axial Cables

JACK DAVIS
Dept. E.E.
30 PERCY STREET, LONDON, W.1
Telephone : MUSeum 7960

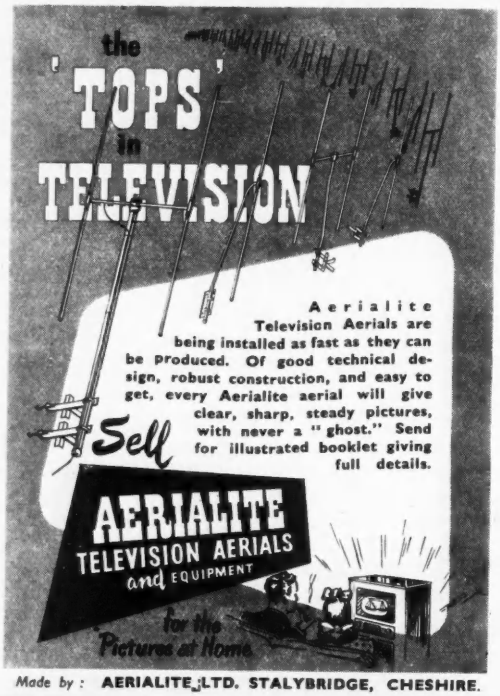
the
'TOPS'
in
TELEVISION
Aerialite
Television Aerials are being installed as fast as they can be produced. Of good technical design, robust construction, and easy to get, every Aerialite aerial will give clear, sharp, steady pictures, with never a "ghost." Send for illustrated booklet giving full details.
Sell
AERIALITE
TELEVISION AERIALS
and EQUIPMENT
for the
Pictures at Home

Made by : AERIALITE LTD. STALYBRIDGE, CHESHIRE.

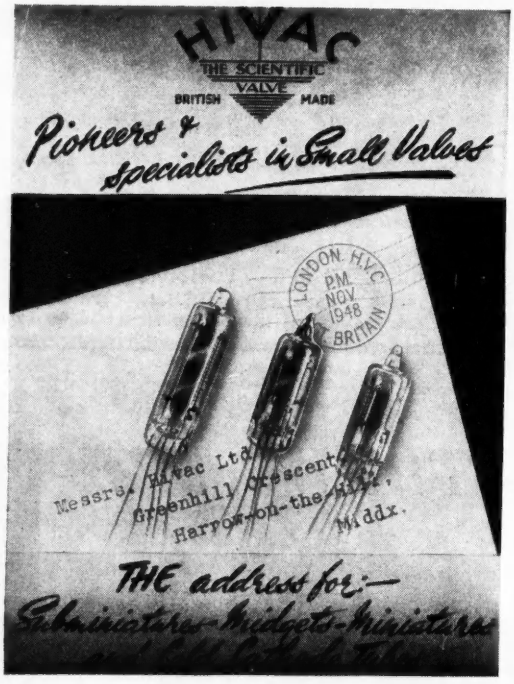

AMBITIOUS ENGINEERS

HAVE YOU HAD *YOUR* COPY OF "ENGINEERING OPPORTUNITIES"?

Whatever your age or experience—you must read this highly informative guide to the best paid engineering posts. The handbook contains particulars of **A.M.I.C.E., A.M.I.Mech.E., A.M.I.E.E., A.M.I.M.I., A.M.Brit.I.R.E.,** and other important Engineering Examinations, and outlines home-study courses in all branches of **Civil, Mechanical, Electrical, Automobile, Radio and Aeronautical Engineering, Government Employment, Draughtsmanship, Building and Plastics, Matriculation, etc.**

We Guarantee

"NO PASS — NO FEE"

If you are earning less than £10 a week you cannot afford to miss reading "**Engineering Opportunities.**" It tells you everything you want to know to secure your future. Write for your copy of this enlightening guide to well paid posts **NOW—FREE** and without obligation.

BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY
337A, Shakespeare House, 17/19, Stratford Place, London, W.1

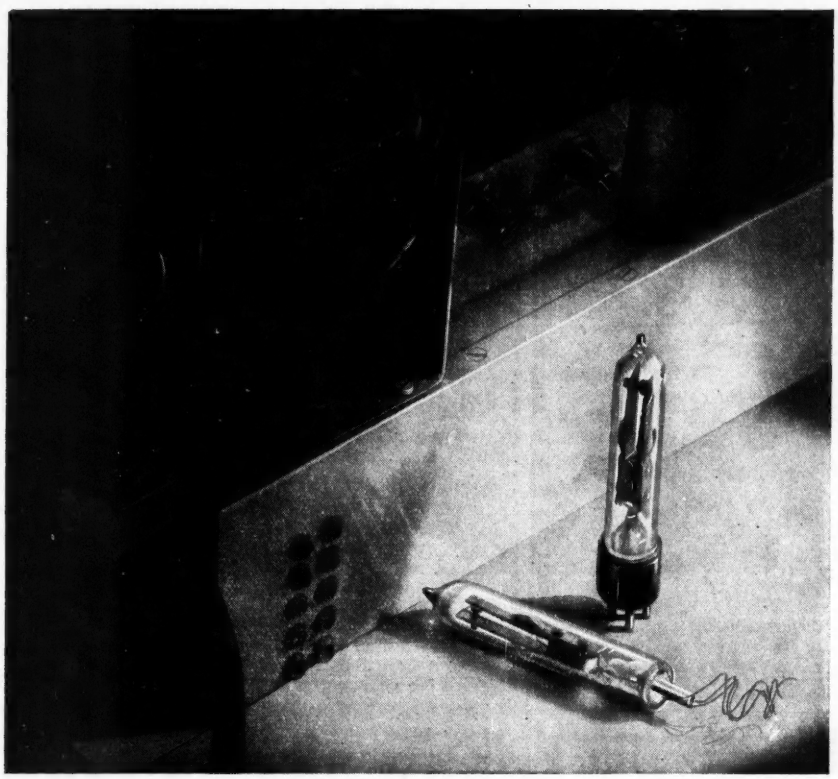

SUNVIC

MINIATURE TIME-DELAY SWITCHES

Reliable, compact, bimetal switches, glass-sealed and evacuated, to operate after a time-delay (such as may be needed to allow valve-filaments to heat-up). The switch operates on 6.3 volts and switches in a maximum of 1 amp. at up to 380 volts AC or 600 volts DC. Time-delay 25 to 100 seconds. Available unmounted (Type 2TQV) or with English miniature 4-pin base (Type 2TQVM). For full specification please write for Publication TV10/16. Other time-delay switches, Publication MS10/16.

SUNVIC CONTROLS LTD.

10 ESSEX STREET, STRAND, LONDON, W.C.2.

TAS/SC192

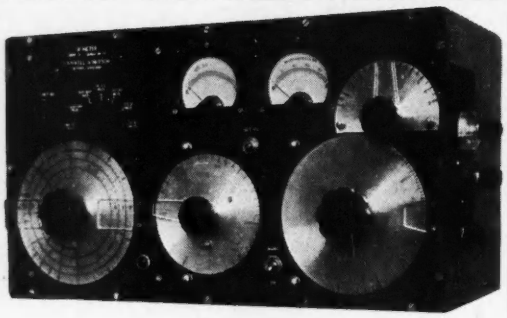

"Q" METER
TYPE 31

An accurate and reasonably priced instrument for laboratory and production use

Frequency range	100 Kc/s. – 30 Mc/s.
Capacity range	35μμF. – 500μμF.
"Q" range	0 – 300
Frequency accuracy	1%
Capacity accuracy	1% or ± 1μμF.
"Q" accuracy	± 5%

PRICE £85
DELIVERY EX STOCK

SAMWELL & HUTTON
Electronic Equipment Manufacturers
COMBINE WORKS,
1, GOODMAYES ROAD, ILFORD, ESSEX
Telephone : SEVen Kings 6236

from the range of **Q** *instruments*

The TWENTY MILLION MEGOHMMETER

A new instrument for Research and Industry. Covers the entire resistance range from 0.3 to 20,000,000 megohms. Two test voltages, 85v and 500v, are provided. A six-inch mirror scale enables readings to be taken accurately and quickly. Designed for testing cables, resistors, capacitors and all insulating materials.

ELECTRONIC INSTRUMENTS LTD
17 PARADISE ROAD · RICHMOND · SURREY

10^{-10} amps

TELCON *Anti-Microphonic* **CABLES**

materially assist in the successful design of electronic instruments intended for the measurement of minute currents of the order of 10^{-10} amps. Details of this range of 'Gee' cables may be had on application.

Founded 1864

THE TELEGRAPH CONSTRUCTION & MAINTENANCE CO. LTD.
Head Office: 22 OLD BROAD ST., LONDON, E.C.2. *Tel: LONdon Wall 3141*
Enquiries to TELCON WORKS, GREENWICH, S.E.10. *Tel: GREenwich 3291*

ELECTRONICS IN INDUSTRY

POSTAL COURSES

E.M.I. Institutes, an associate of Britain's largest group of Electronic Companies ("His Master's Voice", Marconiphone, etc.), have prepared a POSTAL COURSE specially suited to the needs of Industrial Executives and Technicians as well as to those of students.

WRITE FOR FREE BOOKLET giving full details of this and other Postal and Attendance courses.

ADVICE ON INDUSTRIAL ELECTRONIC PROBLEMS

An experienced consultation service is available to those who have problems of production or research which might be solved by Electronic methods.

E.M.I. INSTITUTES

DEPT. 11, 43 GROVE PARK ROAD, CHISWICK LONDON, W.4. TELEPHONE: CHIswick 4417/8

E.11.48

"VICTORIA" at the B·I·F

Visitors to our stand will be interested in the development of Victoria instruments during the past twelve months. New, advanced instruments and their applications will be demonstrated, and technicians will be at hand for advice on any matters relating to our products.

B.I.F. OLYMPIA
Stand No. C.52



SQUARE FLANGE METERS

4" Large Open Scale. Mirror Scale can be supplied if required.
RANGES:
A.C. From 1V-10kV
25μA-100 Amps.
D.C. From 5mV-10kV
5μA-5000 Amps.

Victoria Instruments are made uncommonly well

VICTORIA INSTRUMENTS
Proprietors: V.I.C. (Bournemouth) Ltd.
MIDLAND TERRACE · LONDON · N.W.10
Telephone: ELGar 7871/2

TAYLOR SWITCHES

MODEL 950

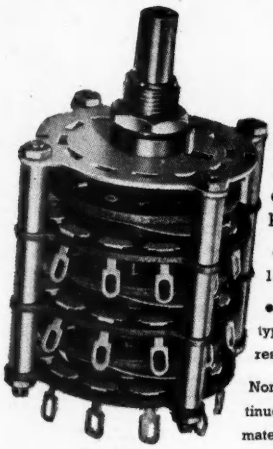

This switch is designed for Radio, Electronic or Instrument use. It is robust, reliable and will give a long trouble-free life. Available as non-shorting or shorting type in many combinations up to 5 decks per spindle.

• **COMPACTNESS** Occupies space 1½" sq.

• **CURRENT RATING** Shorting type. 10 Amperes continuous. Contact resistance approximately 0.003 ohm.

Non-shorting type. 5 Amperes continuous. Contact resistance approximately 0.008 ohm.

• **CONTACTS** Contacts are of large area, and both brushes and contacts are heavily silver-plated.

• **BRUSHES** Strong spring brushes are attached to an insulated rotor. The angle at which the brushes are set is such as ensures self cleaning and smooth action.

TAYLOR ELECTRICAL INSTRUMENTS LTD.
419-424 MONTROSE AVENUE, SLOUGH, BUCKS, ENGLAND
Telephone: Slough 21381 (4 lines). Grams & Cables: Taylins Slough

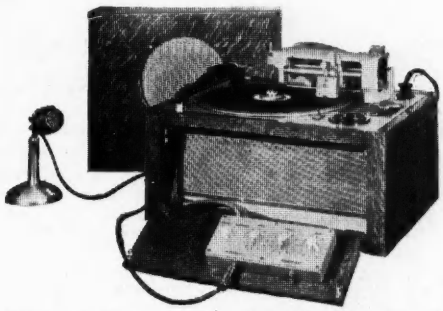

BROWN-E.R.D. 13 inch Portable Disc Recorder
An important S. G. Brown product

Brown-E.R.D.

DISC RECORDER

Incorporating the latest advances in Sound-on-Disc Recording

Write for interesting brochures presenting full technical details of this latest deve opment in Sound-on-Disc recording. Also 17 inch models for the Professional user.

S. G. BROWN, LTD., *Shakespeare St.,* **WATFORD**

Established in Electro Acoustics and high precision Engineering for over 40 years. Manufacturers of the world-famous 'BROWN' Gyro Compass.

Telephone: WATFORD 7241.

YOU CANNOT BE WITHOUT A "Q-MAX" CHASSIS CUTTER
MAKES HOLE CUTTING A PLEASURE!



⅝", ¾"	9/6 Key 9d.
1", 1¼", 1½", 1⅝"	12/6 (Key 1/-)
2⅜"	25/- (Key 1/-)

WE SPECIALISE IN "SPECIALS"
A FEW RECENT EXAMPLES:
A 6 K.V.A. oil-cooled auto-wound Transformer; Pri. 230V. Sec. 55V., 109 amps.
A Sliding Resistance covering from 10 KW. to 4 KW.
A 5.0 W. Air-Cooled Transformer tapped at 200-240-280-320-360-400 volts.
If your problem is large or small—we can handle it; we carry large stocks of Precision Components, the latest Midget Valves, 1/10 W. Resistors, Variables, etc.
ILLUSTRATED CATALOGUE 3D. POST FREE

BERRY'S
(SHORT WAVE) LTD.
25, HIGH HOLBORN, LONDON, W.C.1 (HOL. 6231)

Some Outstanding Advantages of the RF E.H.T. System

(1) **Low Cost.** 5.5KV E.H.T. unit at £3/15/- complete. 8 KV E.H.T. for 15" tubes, at £5/5/-. No Purchase Tax.

(2) **AC/DC Technique.** Can be used for providing E.H.T. where no mains transformers is utilised.

(3) **Weight.** Total weight of 5.5 KV unit, 14 ozs. This means lighter chassis and cabinet (E.H.T. units ready for mounting anywhere on chassis or in cabinet).

(4) **Picture Quality.** Excellent regulation and no line linearity distortion. Both these troubles are frequently encountered with flyback E.H.T.

(5) **Independent Operation.** Adjustment of Line Time Base controls do not affect the E.H.T. as with line flyback method, thus facilitating adjustments.

(6) **No Burnt-Out Transformers.** An accidental or permanent short of the E.H.T. to ground will not harm circuit.

(7) **Non-Lethal.** Due to the high source impedance of these supplies they are very much safer than a conventional 50 c/s unit.

Consider these technical and economic advantages and change to RF E.H.T. now.

From all principal component stockists. In case of difficulty write to :—

HAZLEHURST DESIGNS LIMITED

186 Brompton Road, Knightsbridge, S.W.3

Transformers made to measure





SAVAGE TRANSFORMERS are built to satisfy customer's individual requirements—they are *not* mass-produced. They are designed specially for the work they have to perform.

Every SAVAGE TRANSFORMER is subjected to exhaustive electrical and mechanical tests before despatch, to ensure years of faultless service. Available in all capacities up to 5 KVA.

If yours is a TRANSFORMER PROBLEM—write to us. We can solve it. Please address technical enquiries personally to our MR. W. BRYAN SAVAGE at

Savage TRANSFORMERS LTD OF **Devizes**

SAVAGE TRANSFORMERS LTD.,
NURSTEED ROAD, DEVIZES, WILTS.
Telephone 536

I4128B

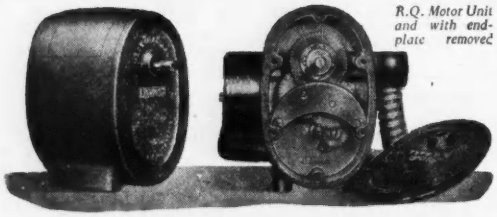

R.Q. Motor Unit and with end-plate removed

SMALL GEARED MOTOR UNITS

The Drayton "R.Q." is a 25-watt motor unit geared to a final shaft, to which may be fitted eccentrics, arms or cranks, gears, links or pulleys for actuating valves or dampers, movements, switchgear or other devices.

Supplied continuous running or reversing, with or without self-switching, for 100/110 or 200/250 volts A.C.

Both types are fitted with an auxiliary two-way switch, actuated by movement of the final shaft, for operating auxiliary gear such as fan motors, pumps, interlocking devices, etc.

Final Shaft Speeds :
600 r.p.m./27 min. per rev.
***Torque:* 60 in. lbs. *Consumption :* 25 W.**

DRAYTON 'R.Q.'

for

Operating Valves, Dampersor Rheostats, Cinema Projectors, Rotating Screens, Illuminated Signs, Small Working Models, Geneva Movements for Drum-type Switches, Rocking Baths, Work Movement, Soldering and Welding Fixtures, Continuous Turning, Feed of Light Strip under Process.

Send for List No. M302-1

DRAYTON REGULATOR & INSTRUMENT CO., LTD., WEST DRAYTON, MIDDLESEX.

RQ7

Industrial Applications include:
SMOKE DENSITY INDICATOR
SMOKE ALARM
LIGHTING CONTROL (Dusk to Dawn)
COUNTING UNIT
INVISIBLE RAY BURGLAR ALARM
TURBIDITY INDICATOR
FLAME FAILURE CONTROL

RADIOVISOR PARENT LTD
1, STANHOPE STREET, LONDON, N.W.1
Telephone: EUSton 5905/6

CONSISTENTLY *Accurate*

PULLIN

Multi-Range Test Set Series 100

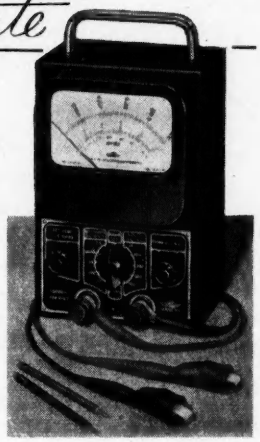

A Service Engineers' Universal Testing Set, with sensitivity of 10,000 ohms per volt. Strong metal case with carrying handle—complete with leads having detachable bull-dog clips and test prods. Ranges:
AC/DC Volts: 10, 25, 100, 250, 500, 1,000.
D.C. Milliamps: 2.5, 10, 25, 100, 500.
AC/DC Microamps: 100 Microamps on the 10V range.
Resistance ranges: 0.1 Meg. (13,000 ohms mid-scale), 0/10,000 ohms (135 ohms mid-scale).
Size 9" × 5½" × 4". **Price £10-10s.**

● *We can give early deliveries—write for details :—*

Address all inquiries to:—

MEASURING INSTRUMENTS (PULLIN) LTD.
DEPT. E, ELECTRIN WORKS, WINCHESTER ST., LONDON, W.3
TELEPHONE : ACOrn 4651/3 and 4995

The Greatest **Advance** *yet !*
100 Kc/s to 100 Mc/s
ON FUNDAMENTALS



Range: 100 Kc/s.—100 Mc/s. *in 6 bands.*
Frequency: *Guaranteed within* ±1%.
Output: *Approx. 1 volt unattenuated and variable from 1 μV to 100 mV into a 75 ohm load through a matched transmission line.*
Stray Field: *Less than 3μV at 100 Mc/s.*
Illuminated Dial: *Total scale length, 30 in.*
Power Supply: 100 — 210 — 230 — 250 volts. 40-100 c/s.
Dimension: 9½ *in. high* × 13 *in. wide* × 8 *in. deep.*
Weight: 15 *lb.*

The new Advance Signal Generator, Type E.2, has all the advantages of the popular Model 1 plus a greatly extended range to cover the Birmingham Television frequencies. The wider range, 100 Kc/s. to 100 Mc/s., gives greater scope for advanced experimental work than ever before.

In common with the earlier model, the new generator offers an instrument of laboratory standard at a price within the reach of moderate purses. The remarkable high frequency accuracy of ±1% extends over the whole range.

Send for fully descriptive leaflet.

Advance TYPE E2 SIGNAL GENERATOR

ADVANCE COMPONENTS LTD.,
Back Road, Shernhall Street, Walthamstow, London, E.17
Tel. : LARkswood 4366/7/8

AUSTINLITE GOES TO SEA

The Austinlite Rotary Switch *is part of the equipment of the new Bridlington lifeboat.*

Send for folder giving full particulars of this heavy-duty 30 amp. switch.

A *Chance* PRODUCT

AUSTINLITE LIMITED *(Proprietors Chance Brothers Limited)*
Dept. J. Lighthouse Works, Smethwick 40, Nr. Birmingham.

MODERN SERVICING METHOD

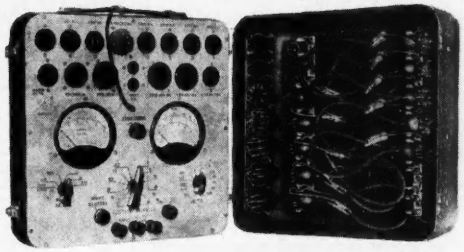

The "L.S.L." Servicing Method is a combined fault analyser and circuit tester; simultaneously capable of indicating all voltage, current and resistance on each valve electrode without removing the chassis from the cabinet. Readings can be taken whilst the set is under actual operating conditions The "L.S.L." Analyser is a combination of multi-range instrument and valve tester.

PRICE : £18 . 18 . 0 Subject.

THE "LSL" PORTABLE ANALYSER

★ *Saves time and trouble.* ★ *Greatly increases Profit in the Service Department.* ★ *Is portable, can be used on the bench or in the home.* ★ *Is simple to operate.*

Send for further particulars from the sole distributors:

Kerry's (GREAT BRITAIN) *Limited*
WARTON ROAD, STRATFORD, LONDON, E.15,
Telephone : Maryland 6611 *AND BRANCHES*
Export Address 23-26 St. DUNSTANS HILL, E.C.3

Recommended by this Journal

THE
ELECTROLYTIC CAPACITOR

A. M. Georgiev : 71 Illus. : 15/-

"An up-to-date authoritative book on electrolytic capacitors . . . the treatment throughout being clear and lucid . . . can be recommended to all concerned with the use of electrolytic capacitors and particularly to designers of radio equipment."
Electronic Engineering

CROSBY LOCKWOOD
39 THURLOE STREET, S.W.7.

POTENTIOMETERS



by

RELIANCE

Wire wound and Composition types, Single, Ganged, Tandem Units.

Characteristics: linear, log, semi-log, non-inductive, etc.

Full details from

RELIANCE
Manufacturing Co. (Southwark) Ltd.
Sutherland Rd., Higham Hill, Walthamstow E.17
Telephone : LARkswood 3245

L.T.P. REWIND SERVICE

All rewinds are Layer Wound, Vacuum Impregnated, Pressure tested at 2,000 volts and guaranteed for three months.

48 hour service.

Enquiries :

London Transformer Products Ltd.
L.T.P. Works, Cobbold Estate, Willesden, London, N.W.10
Telephone WILlesden 6486

INDEX TO ADVERTISERS

A.B. Metal Products Ltd. 19
Advance Components Ltd. 31
Aerialite Ltd. 26
Airmec Laboratories Ltd. 5
All-Power Transformers Ltd. 20
Armstrong Wireless & Television Co., Ltd. 18

Baldwin Instrument Co., Ltd. 13
Belling & Lee, Ltd. 10
Berry's (Short Wave) Ltd. 29
Books & Careers 150
Bray & Co., Ltd., George 26
British Electric Resistance Co., Ltd. .. 17
British Institute of Engineering Technology 26
British Insulated Callender's Cables Ltd. Cover i
Brown Ltd., S. G. 29
Bullers Ltd. 8

Chance Bros. Ltd. 31
Chapman & Hall Ltd. 151
Crosby Lockwood 32

Davis, Jack 26
Dawe Instruments Ltd. 12
De La Rue Insulation Ltd. 18
Drayton Regulator & Instrument Co., Ltd. 30

Edison Swan Electric Co., Ltd. Cover ii and 7
Electrical Sound & Television Patents Ltd. 25
Electronic Instruments Ltd. 28
E.M.I. Institutes Ltd. 28
Enock Ltd., Joseph 24
Erie Resistor Ltd. 6

Fox Ltd., P.X. 21

Gardner's Radio Ltd. 12
General Electric Co., Ltd. 14
Goodmans Industries Ltd. 22

Harboro' Rubber Co., Ltd., The 26
Hazlehurst Designs Ltd. 30
Hivac Ltd. 26

Kerry's (Great Britain), Ltd. 31

Leland Instruments Ltd. .. .. Cover iii
Lewis & Co., Ltd., H. K. 151
London Transformer Products Ltd. .. 32

Measuring Instruments (Pullin) Ltd. .. 31
Micanite & Insulators Co., Ltd., The .. 11
Modern Book Co. 150
Muirhead & Co., Ltd. 9
Mullard Electronic Products Ltd. .. 3 and 19

Painton & Co., Ltd. 4
Parmeko 17
Partridge Transformers Ltd. 32
Pell Control Ltd., Oliver 4

Radiovisor Parent Ltd. 30
Rediffusion Ltd. 25
Reliance Mfg. Co. (Southwark) Ltd. .. 32

Samwell & Hutton 28
Sangamo-Weston Ltd. .. .. Cover iv
Savage Transformers Ltd. 30
Southern Instruments Ltd. 20
Standard Telephones & Cables Ltd. .. 22
Sunvic Controls Ltd. 27

Taylor Electrical Instruments Ltd. .. 29
Telegraph Condenser Co., Ltd., The .. 15
Telegraph Construction & Maintenance Co., Ltd. 28
Transradio Ltd. 24
Tufnol Ltd. 16

United Insulator Co., Ltd. 24
University Radio Ltd. 32

Victoria Instruments 29
Vortexion Ltd. 21

Wallander Co., The 4
Walter Instruments Ltd. 23
Wayne-Kerr Laboratories Ltd., The .. 13
W.D. Sales 32
Westinghouse Brake & Signal Co., Ltd. .. 25

WE OFFER

A large range of used and new Test Equipment, Converters, Recorders, Amplifiers, Motors, Transformers, etc.

All guaranteed and at very attractive prices.

We buy good modern used equipment of all types for spot cash.

UNIVERSITY RADIO LTD.
22 LISLE STREET, LONDON, W.C.2.
Tel. GER 4447 and GER 8582.

Partridge News

HOME-BUILT TELEVISOR

All the specified "Partridge" components are available from stock, as follows:—

Power-Pack Transformer—
Sub-Chassis mounting ML/435A ... 92/-
Super-Chassis mounting DN/435A 105/-
E.H.T. Transformer mounting VDH/436A 77/-
Smoothing Choke mounting DL/404A 29/-
Smoothing Choke mounting DL/401 17/-

May we send you our price list of over 100 other transformers and chokes available from stock ?

* * * *

LONDON SALES OFFICE

For the benefit of our many friends we have made arrangements for the immediate supply from stock of small quantities of our standard components. These can be collected from our address at King's Buildings, Dean Stanley Street, Millbank, Westminster, S.W.1—Tel. : ABBey 2244—(250 yards from Big Ben). Hours: 10 a.m. to 1 p.m. and 2 p.m. to 5.30 p.m. (Mondays to Fridays only). Kindly note this address is for stock sales only, and all correspondence and other inquiries should be sent to Tolworth.

Telephone : Elmbridge 6737 8

PARTRIDGE
TRANSFORMERS LTD
ROEBUCK RD., TOLWORTH, SURREY.

W.D. TELEVISION RECEIVER

WE INVITE YOU TO CALL ANY DAY
during television transmitting time, to see this excellent little receiver working. You can make this from Government surplus radar equipment. Send 7/6 without delay for the easy-to-follow instructional data. All components are available ex stock again, but
ORDER WITHOUT DELAY

W. D. SALES
10, Electron House, Windmill Hill, Ruislip Manor, Middx.

949

Test
rders,
s, etc.
ctive

quip-
cash.

TD.
V.O.2.
2.

WS
R
onents
—
92/-
105/-
77/-
29/-
17/-
0 other
stock ?

e have
ediate
of our
an be
Build-
West-
—(250
.m. to
days to
ress is
ndence
ent to

GE
LTD
URREY.

S
Middx.



The ORIGINAL Q METERS by Boonton MODELS 160-A & 170-A

These famous instruments, of which several thousand are now in regular use in practically all countries of the world, are still the standards by which all other Q meters are judged. Their specifications constantly under review, the latest models incorporate refinements developed from war-time experience.

★ The Q meter is a universal instrument, it not only measures "performance" or Q, but also determines the radio frequency inductance, capacitance and resistance of coils, condensers, resistors, and also dielectrics, waxes, etc.

★ Model 160-A covers the range 1 Kc/s to 75 Mc/s with eight self-contained oscillator bands and the use of an external oscillator for measurements at frequencies below 50 Kc/s. Q values between 20 and 625 are read directly, to an accuracy of appoximately 5%.

★ Model 170-A is for measurements at frequencies between 30 and 200 Mc/s. Direct indication is given of Q values between 50 and 1,200 to ± 10%.

★ Accessories available include external oscillator units for L.F. work and sets of sub-standard high-Q screened inductors.

★ You are invited to write for data sheets which give the full specification of Models 160-A and 170-A, and also for technical information on other instruments in the ranges of BOONTON, CLOUGH-BRENGLE, BALLANTINE, FERRIS, MERVYN and MIDGLEY-HARMER.

A limited number of model 160-A Q-Meters is currently available from London Stock. Other Boonton instruments are obtainable subject to import licence from the SOLE CONCESSIONAIRES for the United Kingdom—

LELAND INSTRUMENTS LTD.

Electronic Engineers & Consultants

TELEPHONE: CHANCERY 8765 and 8766

21 JOHN STREET • BEDFORD ROW • LONDON W.C.1

Weston

MOVING COIL SWITCHBOARD INSTRUMENTS

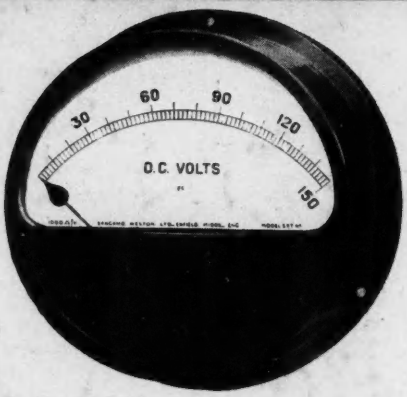

Combining the sensitivity of a laboratory instrument with the robust qualities of a switchboard pattern, this new series of " Weston " permanent-magnet, moving coil instruments represents a great advance in design and technique. They incorporate thermocouples and rectifiers where necessary. Special features include efficient damping, the new standard " Weston " patented spring-loaded jewel to protect the pivot, magnetic shielding and a high degree of accuracy. Mounted in attractive bakelite cases, flush fitting or projecting, the 6-in. easily read scale is printed in black on white enamel. All instruments conform to B.S.I. Spec. No. 89. Special inquiries will receive the personal attention of our Technical experts. The model S57 illustrated is supplied as a D.C. Microammeter, Milliammeter, Millivoltmeter, Ammeter and Voltmeter, all with a variety of ranges.

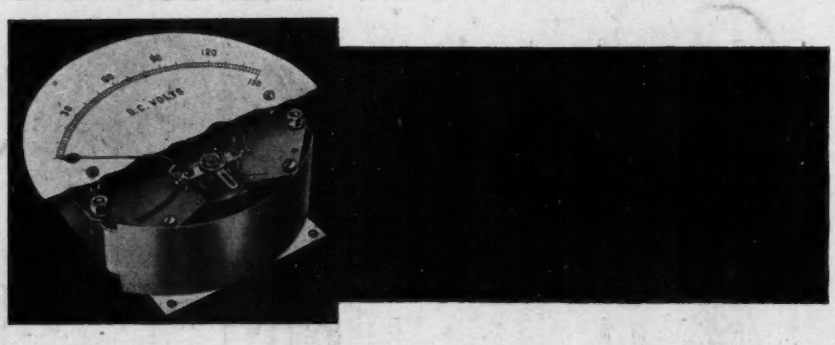

SANGAMO WESTON LIMITED

GREAT CAMBRIDGE ROAD, ENFIELD, MIDDX. *Telephone ;* Enfield 3434 and 1242

Printed in Great Britain by The Press at Coombelands, Ltd., Addlestone, Surrey, for the Proprietors, Morgan Brothers (Publishers) Ltd., 28, Essex Street, Strand, W.C.2
Registered for Transmission by Canadian Magazine Post